



## 75 Ohm F Male to F Female Adapter

### RF Adapters Technical Data Sheet

PE9759

#### Configuration

- F Male Connector 1
- F Female Connector 2
- 75 Ohms
- Straight Body Geometry

#### Features

- Max VSWR of 1.3:1 up to 3 GHz
- Nickel Plated Contact

#### Applications

- Connector Saver
- General Purpose Test

#### Description

Pasternack's PE9759 75 ohm type F male to type F female adapter is part of our full line of RF components available for same-day shipping. Our type F to type F adapter has a male to female gender configuration. PE9759 type F male to type F female adapter operates to 3 GHz. The Pasternack RF adapter provides good VSWR of 1.3:1 maximum. The PE9759 Pasternack RF adapter can also be used as a connector saver to extend equipment life.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.3:1	

#### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 1	1 to 2	2 to 3			GHz
VSWR, Max	1.15:1	1.2:1	1.3:1			

#### Mechanical Specifications

##### Size

Length	1.205 in [30.61 mm]
Width	0.438 in [11.13 mm]
Weight	0.034 lbs [15.42 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to F Female Adapter PE9759](#)



## 75 Ohm F Male to F Female Adapter

### RF Adapters Technical Data Sheet

PE9759

Description	Connector 1	Connector 2
Type	F Male	F Female
Polarity	Standard	Standard

#### Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	F Male		F Female	
Contact		Nickel		Nickel
Outer Conductor			Brass	Nickel
Body	Brass	Nickel		

#### Environmental Specifications

##### Temperature

Operating Range -65 to +125 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

75 Ohm F Male to F Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to F Female Adapter PE9759](#)

URL: <https://www.pasternack.com/f-male-f-female-straight-adapter-pe9759-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE9759 CAD Drawing

## 75 Ohm F Male to F Female Adapter

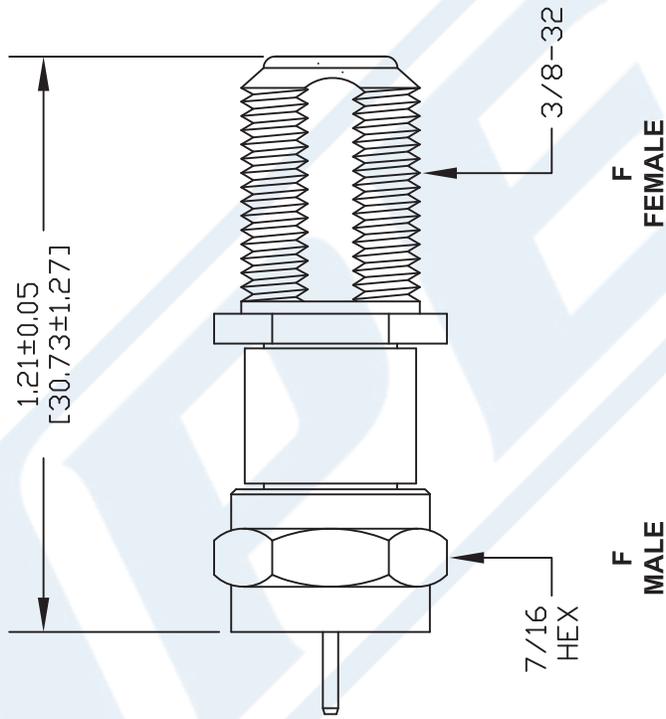

DWG TITLE

**PE9759**

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 020316

SCALE N/A

SIZE A

3045



Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com