

Collinear Omnidirectional Antenna with 134 to 174 MHz,  
4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR



## Antennas Technical Data Sheet

**PEANOM1050**

### Features

- Frequency coverage for 134 MHz to 174 MHz with Type N Female connector
- Moderate Gain 4.5 dBi / 2.35 dBd antennas
- Easy and quick time to installations
- Industrially tuned antenna allows plug and play
- Environmentally friendly strong fiberglass radome material
- Direct ground lightning protection
- 100 W max input power per port
- Vertical Polarization
- Tunable Frequency

### Applications

- Outdoor point-to-point (PtP) or point-to-multipoint (PtMP) applications
- VHF radio applications supported with Trunking for two-way radio communications
- Public Safety / Emergency services / Marine communications / Rail road communications
- Tetra and P-25 Applications exclusively supported
- Land Mobile Radio (LMR) and Private Mobile Radio (PMR)
- Fixed and mobile services for paging/voice/data in full duplex and half duplex mode

### Description

Pasternack's PEANOM1050 4.5 dBi omnidirectional antenna, with N female connector, is an economical yet high-performance antenna designed for high-power applications. This high gain 4.5 dBi antenna transmits high-power signals, increasing the signal strength and thus providing improved coverage, better-broadcast control, and faster speed. This omnidirectional antenna can output frequencies from 134 to 174 MHz, which is useful for military communications, trunking, public safety, industrial communication, and amateur radio applications.

This omnidirectional antenna from Pasternack PEANOM1050 uses vertical polarization to transmit signals, thus reducing interference and performing better at lower heights. All components of this 4.5 dBi antenna are DC grounded for lightning protection, rugged outdoor design, and have a high-power handling capacity. The omnidirectional antenna has 1 port to connect an external circuit with 100W maximum input power per port.

Pasternack's PEANOM1050 omnidirectional antenna is made of fiberglass, is omnidirectional, and covers good bandwidth and range. It has a 1.5 VSWR that results in the best power transfer and reduced losses. These 134 to 174 MHz VHF/UHF antennae radiates equal power in all directions perpendicular to the axis, with power declining to zero on the axis, when graphed, the radiation pattern describes a doughnut shape. It comes with a N female connector, which is threaded and weatherproof that ensuring a reliable physical connection.

This Pasternack's PEANOM1050 with a 4.5 dBi maximum gain is ideal for LMR, military, airports, construction, mining, commercial applications, and radio users. This PEANOM1050 omnidirectional antenna from Pasternack comes in compact packaging for lower shipping costs. Pasternack's 134 to 174 MHz, 4.5 dBi omnidirectional antenna with a N female connector is in stock and ready to ship the same day. Contact Pasternack's knowledgeable and friendly technical support and sales staff for your answers on antennas or other products.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Collinear Omnidirectional Antenna with 134 to 174 MHz, 4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR PEANOM1050](#)

Collinear Omnidirectional Antenna with 134 to 174 MHz,  
4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR



## Antennas Technical Data Sheet

**PEANOM1050**

### Configuration

Design	Omni
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical
Connector Type	N Female
Number of Ports	1
Lightning Protection	DC Ground

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range (Tunable)	134		174	MHz
Operational Bandwidth		5		MHz
Input VSWR			1.5:1	
Impedance		50		Ohms
Gain			4.5	dBi
Input Power			100	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Collinear Omnidirectional Antenna with 134 to 174 MHz, 4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR PEANOM1050](#)


Collinear Omnidirectional Antenna with 134 to 174 MHz,  
4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR



**Antennas Technical Data Sheet**

**PEANOM1050**

**CUTTING CHART**

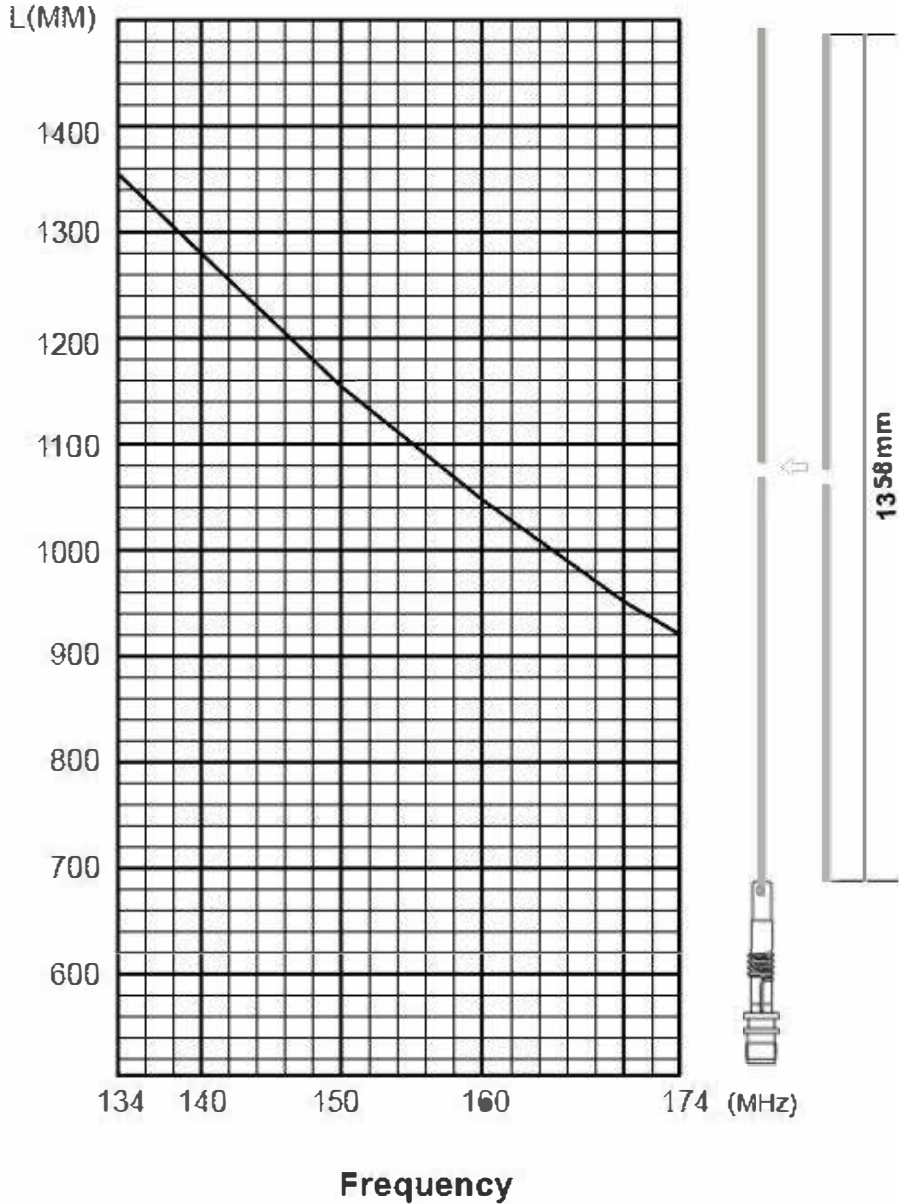

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Collinear Omnidirectional Antenna with 134 to 174 MHz, 4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR PEANOM1050](#)

Collinear Omnidirectional Antenna with 134 to 174 MHz,  
4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR



## Antennas Technical Data Sheet

**PEANOM1050**

### Mechanical Specifications

Radome Material

Fiberglass

#### Size

Overall Length

65 in [165.1 cm]

Width

1.2 in [30.48 mm]

Height

1.2 in [30.48 mm]

Weight

24.2 lbs [10.98 kg]

### Environmental Specifications

#### Temperature

Operating Range

-40 to +80 deg C

### Compliance Certifications (see [product page](#) for current document)

### Plotted and Other Data

Notes:

•

Remove the bolt and washer holding the support tube in place.

- Lower the support tube to expose the N connector.
- Using an Allen wrench, loosen the set screw holding the N Connector assembly in place.
- Withdraw the radiating element from the fiberglass tube.
- Measure and Cut.
- Reassemble and re-mount.

Collinear Omnidirectional Antenna with 134 to 174 MHz, 4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Collinear Omnidirectional Antenna with 134 to 174 MHz, 4.5 dBi, N Female, Vertical Polarization, 1 Port, 1.5 VSWR PEANOM1050](#)


URL: <https://www.pasternack.com/antenna-134-174-mhz-n-type-female-connector-peanom1050-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


# PEANOM1050 CAD Drawing

Collinear Omnidirectional Antenna with 134 to 174 MHz, 4.5 dBi, N  
Female, Vertical Polarization, 1 Port, 1.5 VSWR

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/5/2022	KHIETPAS

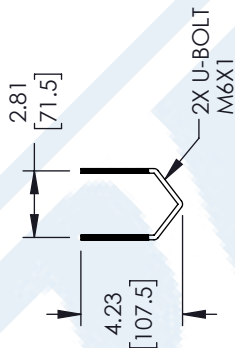

NOTES:  
1. LABEL PER ILS-100-03 (FOR INTERNAL REFERENCE ONLY).  
LABEL LOCATION FOR REFERENCE ONLY.

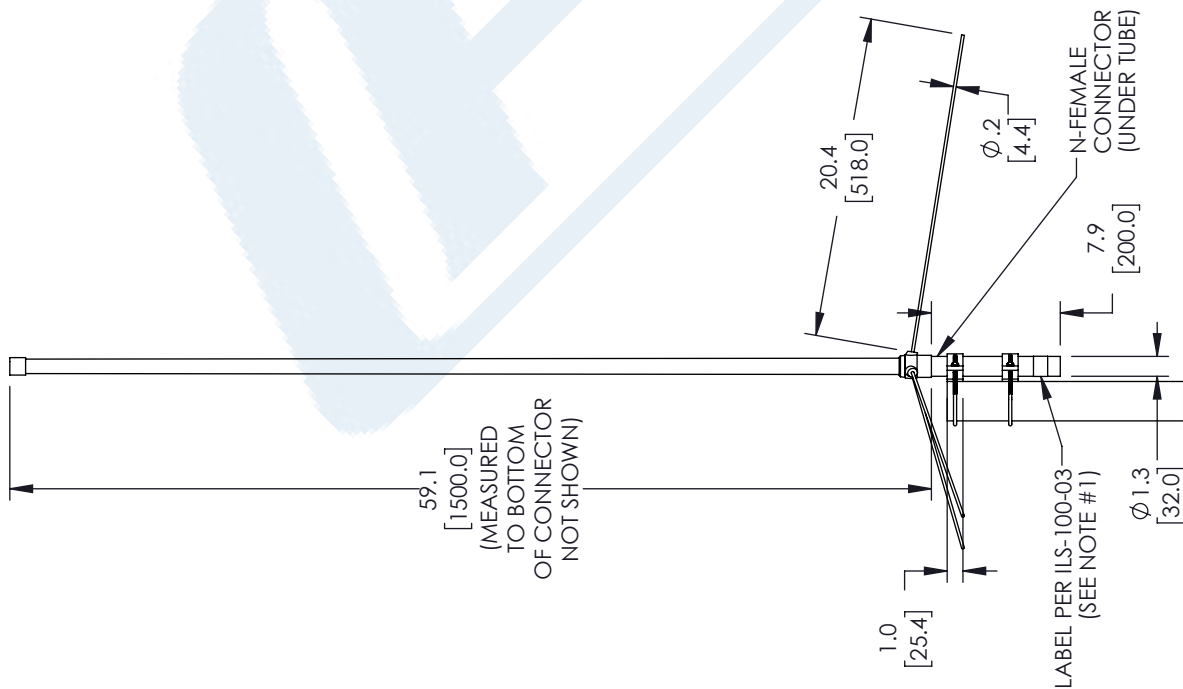

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
X = ±.2 [5.08] | FRACTIONS ± 1/32  
XX = ±.02 [.51] | ANGLES ± 1°  
XXX = ±.005 [.13]

CABLE LENGTH (L) TOLERANCES:  
L ≤ 12 [305] = ±1 [25] / -0  
12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
300 [7620] < L = +5% / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK**  
an INFINITI<sup>®</sup> brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

SIZE CAGE CODE DRAWN BY ITEM NO. REV  
A 53919 DMAY PEANOM1050 A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.