



WR-112 CPR-112G Grooved Flange to SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1011

Features

- H Band
- 7.05 to 10 GHz Frequency Range
- WR-112 Waveguide Interface
- Grooved CPR-112G Flange
- SMA Female RF Interface

Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Description

The PEWCA1011 is a waveguide to coaxial adapter operating in the H Band with a 7.05 to 10 GHz frequency range. This adapter offers a WR-112 waveguide interface size using a Grooved CPR-112G Flange. The PEWCA1011 is constructed of Copper Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a SMA Female Nickel Plated Brass Connector.

Configuration

Waveguide Size	WR-112
Flange	CPR-112G
RF Connector	SMA Female
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.05		10	GHz
VSWR			1.25:1	

Mechanical Specifications

Weight	0.391 lbs [177.35 g]
RF Connector	
Connector Type	SMA Female
Body Material and Plating	Brass, Nickel
Waveguide Interface	
Waveguide Type	WR-112
Flange Type	CPR-112G
Body Material and Plating	Copper Alloy, Paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 CPR-112G Grooved Flange to SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band PEWCA1011](#)



WR-112 CPR-112G Grooved Flange to SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1011


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

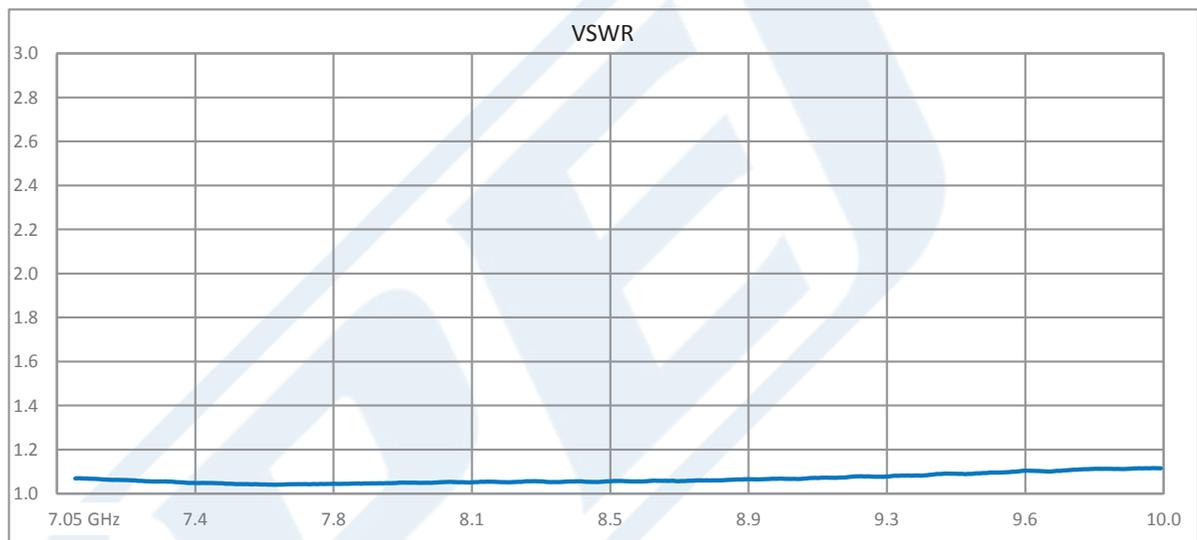

WR-112 CPR-112G Grooved Flange to SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 CPR-112G Grooved Flange to SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band PEWCA1011](#)

URL: <https://www.pasternack.com/wr-112-cpr-112g-grooved-sma-female-waveguide-coax-adapter-10-ghz-pewca1011-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWCA1011 CAD Drawing

WR-112 CPR-112G Grooved Flange to SMA Female Waveguide to Coax Adapter Operating From 7.05 GHz to 10 GHz, H Band

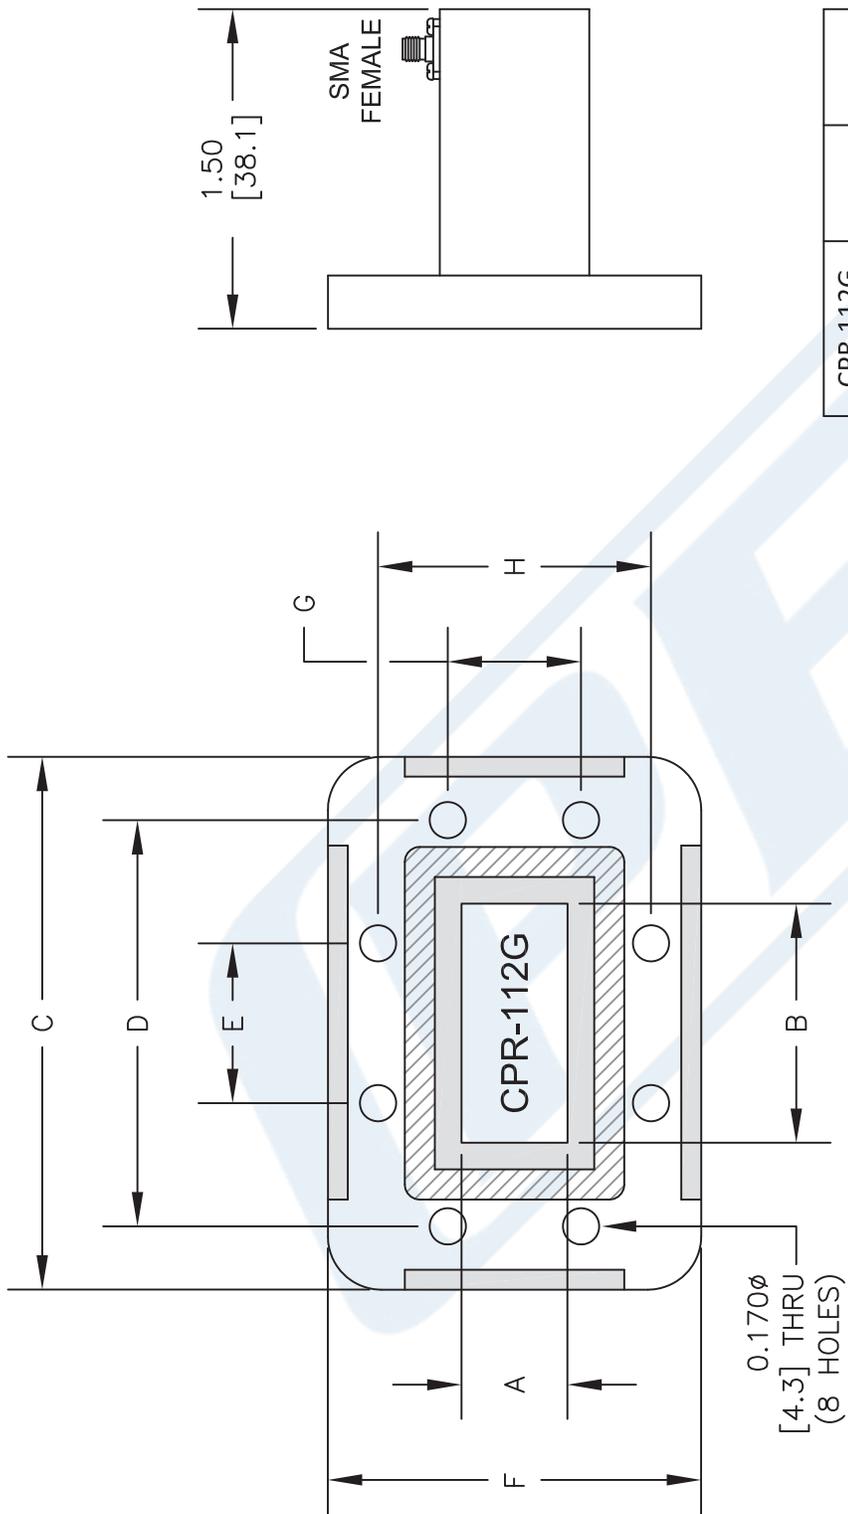

CPR 112G	Dimension	Inches	mm
A		0.497	12.62
B		1.122	28.50
C		2.500	63.50
D		1.906	48.41
E		0.750	19.05
F		1.750	44.45
G		0.625	15.88
H		1.280	32.51

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
 DECIMALS ±0.030
 ANGLES ±1/2 DEG.
 FRACTIONS ±0.015
 .XXX ±0.005

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PEWCA1011

FSCM NO. 53919

CAD FILE 092216

SCALE N/A

SIZE A

2233

PE PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com