

4-40 with 3/32 inch Hex, Stainless Steel Waveguide Flange Screw



PEWGHW9000

Features

- Designed for waveguide assemblies WR-22, WR-19, WR-15, WR-12 and WR-10

Description

PEWGHW9000 is a set of stainless-steel hex screws for waveguide assemblies with WR-22, WR-19, WR-15, WR-12 and WR-10. Pasternack offers a wide variety of accessory products for waveguide assemblies available in stock for same-day shipment.

Mechanical Specifications

| | |
|--------|--------------------|
| Length | 0.42 in [10.67 mm] |
| Width | 0.18 in [4.57 mm] |
| Height | 0.18 in [4.57 mm] |
| Weight | 0.001 lbs [0.45 g] |

Compliance Certifications (see [product page](#) for current document)

4-40 with 3/32 inch Hex, Stainless Steel Waveguide Flange Screw from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4-40 with 3/32 inch Hex, Stainless Steel Waveguide Flange Screw PEWGHW9000](#)

URL: <https://www.pasternack.com/4-40-3-32-inch-Hex-Stainless-Steel-Waveguide-Flange-Screw-PEWGHW9000-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PEWGHW9000 CAD Drawing

4-40 with 3/32 inch Hex, Stainless Steel Waveguide Flange Screw

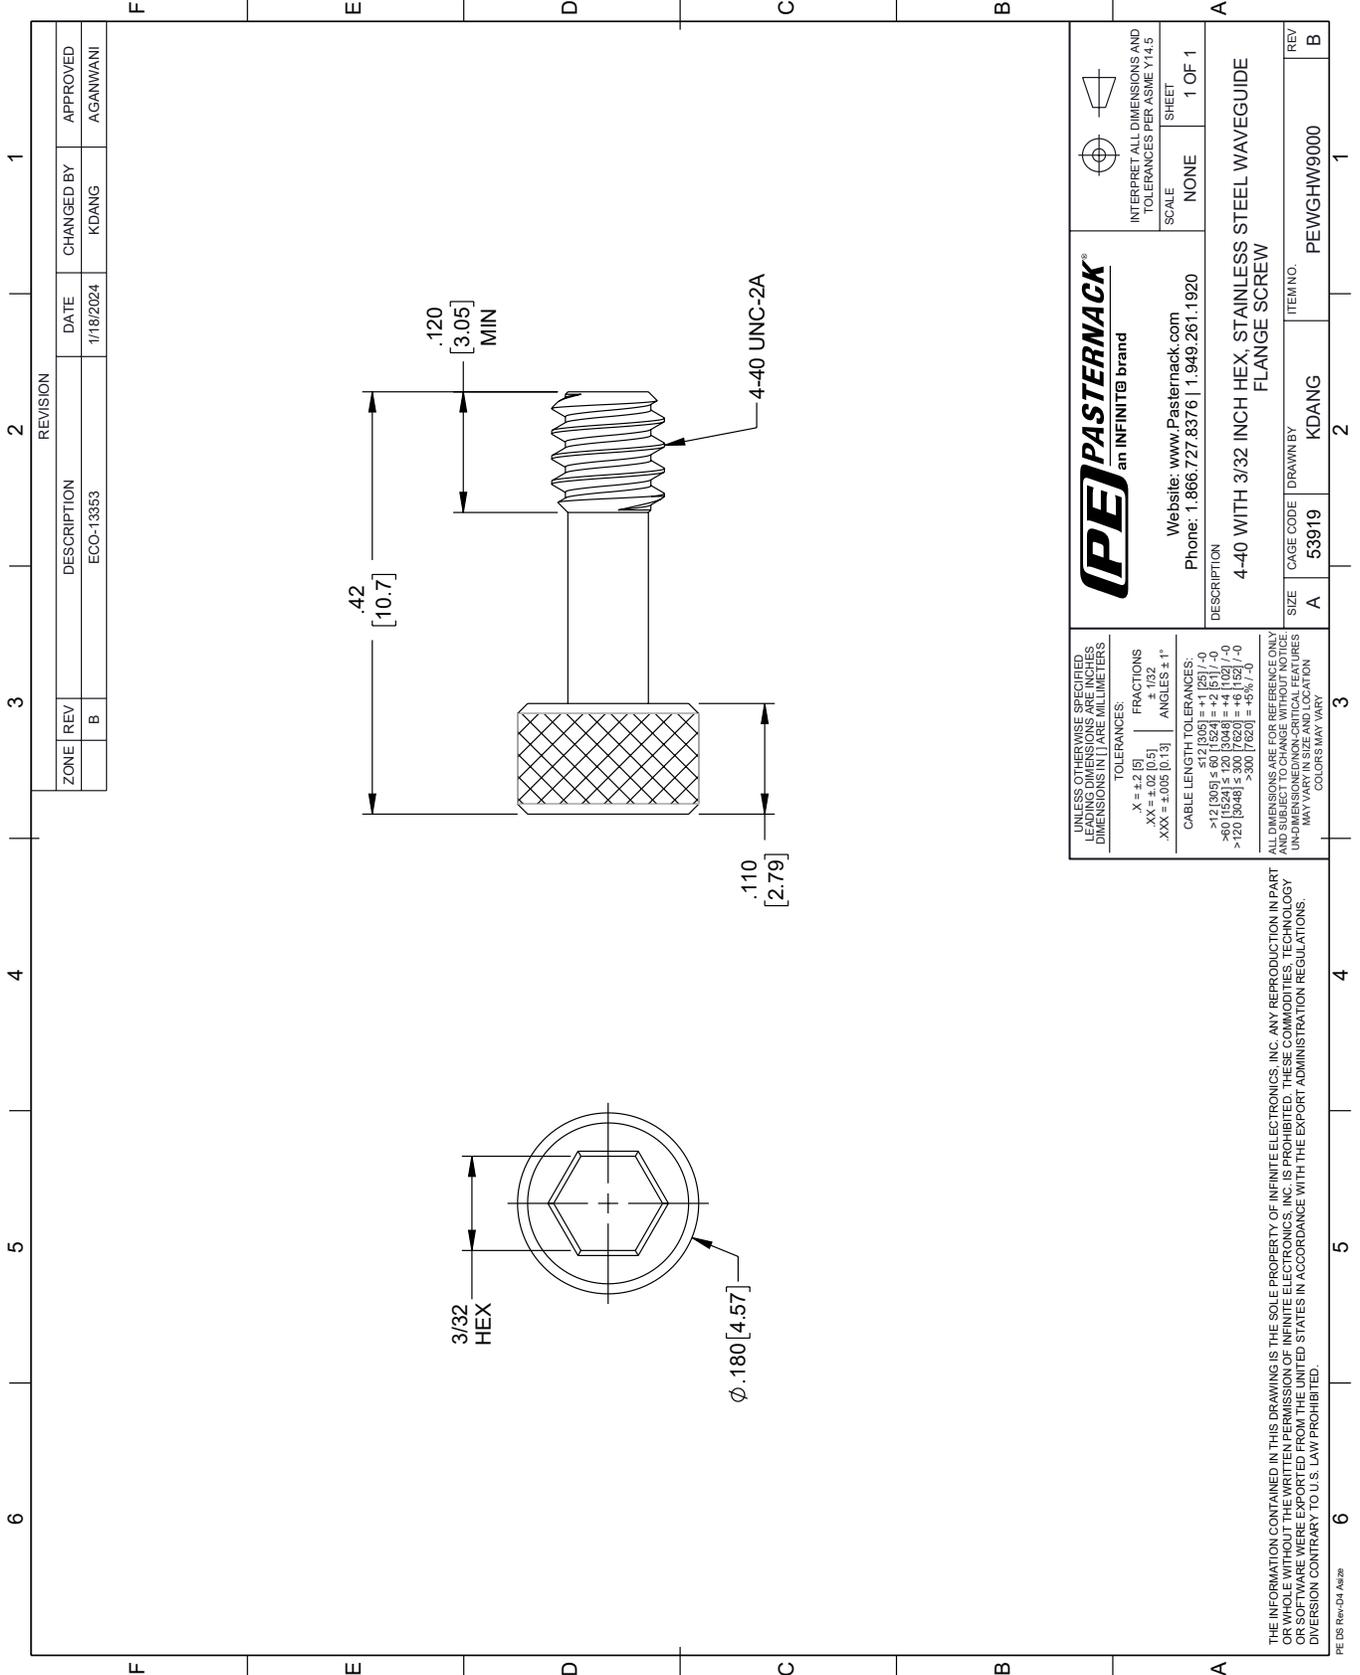

| REVISION | | DATE | CHANGED BY | APPROVED | | |
|----------|-----|-------------|------------|-----------|-------|----------|
| ZONE | REV | DESCRIPTION | ECO-13353 | 1/18/2024 | KDANG | AGANWANI |
| | B | | | | | |

PE PASTERNAK
an INFINIT® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND TRAILING DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES:
 .X = ±.2 [5]
 .XX = ±.02 [0.5]
 .XXX = ±.005 [0.13]

FRACTIONS
 ± 1/32
 ANGLES ± 1°

CABLE LENGTH TOLERANCES:
 <12 [305] ≤ 60 [1524] = ±.1 [25] / -0
 >60 [1524] ≤ 120 [3048] = ±.4 [102] / -0
 >120 [3048] ≤ 300 [7620] = ±.6 [15] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE
SHEET: 1 OF 1

DESCRIPTION: 4-40 WITH 3/32 INCH HEX, STAINLESS STEEL WAVEGUIDE FLANGE SCREW

| | | | | | | | |
|------|---|-----------|-------|----------|-------|----------|------------|
| SIZE | A | CAGE CODE | 53919 | DRAWN BY | KDANG | ITEM NO. | PEWGHW9000 |
| REV | B | | | | | | |

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SERVICES ARE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

PE DS Rev-04 Add2