

# 1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz



## Waveguide Terminations Technical Data Sheet

**PEWTR1003** 

#### **Features**

- WR-51
- 15 GHz to 22 GHz
- Square Cover Flange

- 1.02:1 Typical VSWR
- 1 Watt Average Power Handling

### **Applications**

- · Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs

Microwave Radio Systems

#### **Description**

The PEWTR1003 is a WR-51 waveguide termination / load that operates in the frequency range of 15 GHz to 22 GHz. This WR-51 waveguide termination has a typical VSWR of 1.02:1. These waveguide termination designs are made of painted brass copper and incorporate a standard Square Cover flanges.

Pasternack waveguide terminations / loads are designed so virtually all applied power is absorbed, thus assuring a low VSWR. The power rating on this WR-51 termination is 1 watt, other detailed specifications and a diagram drawing can be found on this datasheet PDF below. Pasternack offers a complete family of waveguide terminations that are in-stock for same day shipment.

#### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	15		22	GHz
VSWR		1.02:1		
Input Power (CW)			1	Watts

#### **Mechanical Specifications**

Weight 0.216 lbs [97.98 g]

Description	Flange	Waveguide
Designation	None	WR-51
Туре	Square Cover	
Material	Brass	Brass

#### **Environmental Specifications**

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz PEWTR1003

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



# 1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz



### Waveguide Terminations Technical Data Sheet


**PEWTR1003** 

Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

#### **Typical Performance Data**

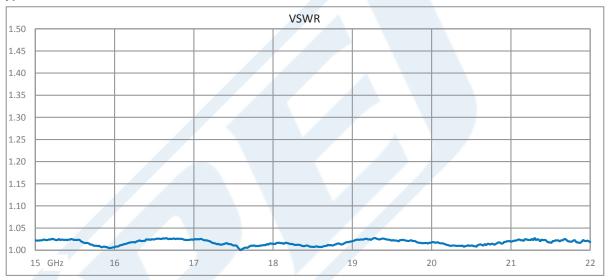

1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz PEWTR1003

URL: https://www.pasternack.com/1-watts-wr-51-rf-load-15-22-ghz-commercial-grade-pewtr1003-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

# **PEWTR1003 CAD Drawing**

1 Watt Low Power Commercial Grade WR-51 Waveguide Load 15 GHz to 22 GHz

