

## 75 Ohm BNC Male Right Angle Connector Crimp/ Solder Attachment for RG59B/U, RG62, RG71



### PE4608

#### Configuration

- BNC Male Connector
- 75 Ohms
- Right Angle Body Geometry
- Connector Interface Types: RG59B/U, RG62, RG71

#### Features

- Max. Operating Frequency 500 MHz
- Good VSWR of 1.5:1
- Gold Plated Brass Contact
- 30 µin minimum contact plating

#### Applications

- General Purpose Test
- Custom Cable Assemblies
- CATV

#### Description

Pasternack's PE4608 Right Angle, BNC, Standard, Connector is part of our full line of RF components available for same-day shipping. Our BNC male connector operates up to a maximum frequency of 500 MHz and offers good VSWR of 1.5:1. Its right angle body geometry allows for easier connections in tight spaces.

Our 75 ohm BNC male right angle connector PE4608 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

| Description            | Minimum | Typical | Maximum | Units |
|------------------------|---------|---------|---------|-------|
| Frequency Range        | DC      |         | 500     | MHz   |
| VSWR                   |         |         | 1.5:1   |       |
| Operating Voltage (AC) |         |         | 500     | Vrms  |
| Impedance              |         | 75      |         | Ohms  |

#### Mechanical Specifications

##### Size

|        |                     |
|--------|---------------------|
| Length | 1.138 in [28.91 mm] |
| Width  | 0.57 in [14.48 mm]  |
| Height | 1.142 in [29.01 mm] |
| Weight | 0.054 lbs [24.49 g] |

75 Ohm BNC Male Right Angle Connector Crimp/  
Solder Attachment for RG59B/U, RG62, RG71



**PE4608**

**Material Specifications**

| Description  | Material | Plating                   |
|--------------|----------|---------------------------|
| Contact      | Brass    | Gold<br>30 µin minimum    |
| Insulation   | PTFE     |                           |
| Body         | Brass    | Nickel<br>100 µin minimum |
| Coupling Nut | Brass    | Nickel<br>100 µin minimum |

**Environmental Specifications**

|                                |                   |
|--------------------------------|-------------------|
| Temperature<br>Operating Range | -65 to +165 deg C |
|--------------------------------|-------------------|

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:


75 Ohm BNC Male Right Angle Connector Crimp/  
Solder Attachment for RG59B/U, RG62, RG71

**PE4608**



**Assembly Instruction**

\*

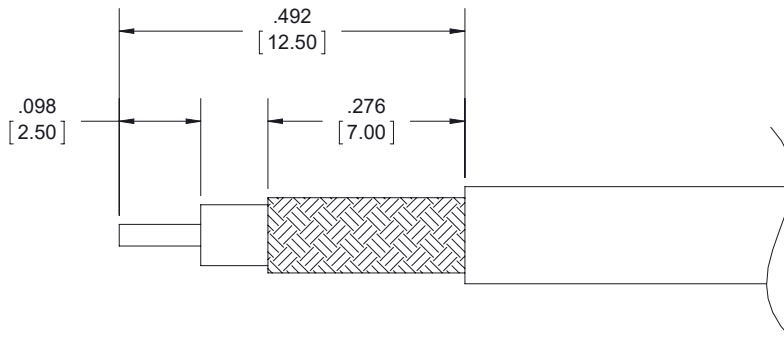

**ASSEMBLY PROCEDURES**

1. STRIP CABLE TO THE DIMENSIONS SHOWN, DO NOT NICK CENTER CONDUCTOR OR BRAID.
2. PUSH CENTER CONDUCTOR FULLY INTO CONTACT AND CRIMP WITH CRIMP TOOL.
3. FLARE BRAID AND INSERT THE BODY UNTIL IT SEATS.
4. SLIDE FERRULE OVER BRAID AND CRIMP WITH CRIMP TOOL.

**CRIMP SIZE REQUIRED**

- CONTACT: .068 [1.73] HEX CRIMP TOOL.
- FERRULE: .256 [6.50] HEX CRIMP TOOL.

## 75 Ohm BNC Male Right Angle Connector Crimp/ Solder Attachment for RG59B/U, RG62, RG71



### PE4608

75 Ohm BNC Male Right Angle Connector Crimp/Solder Attachment for RG59B/U, RG62, RG71 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Male Right Angle Connector Crimp/Solder Attachment for RG59B/U, RG62, RG71 PE4608](https://www.pasternack.com/bnc-male-rg59b-u-rg62-rg71-connector-pe4608-p.aspx)

URL: <https://www.pasternack.com/bnc-male-rg59b-u-rg62-rg71-connector-pe4608-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE4608 CAD Drawing

75 Ohm BNC Male Right Angle Connector Crimp/Solder Attachment for RG59B/U, RG62, RG71

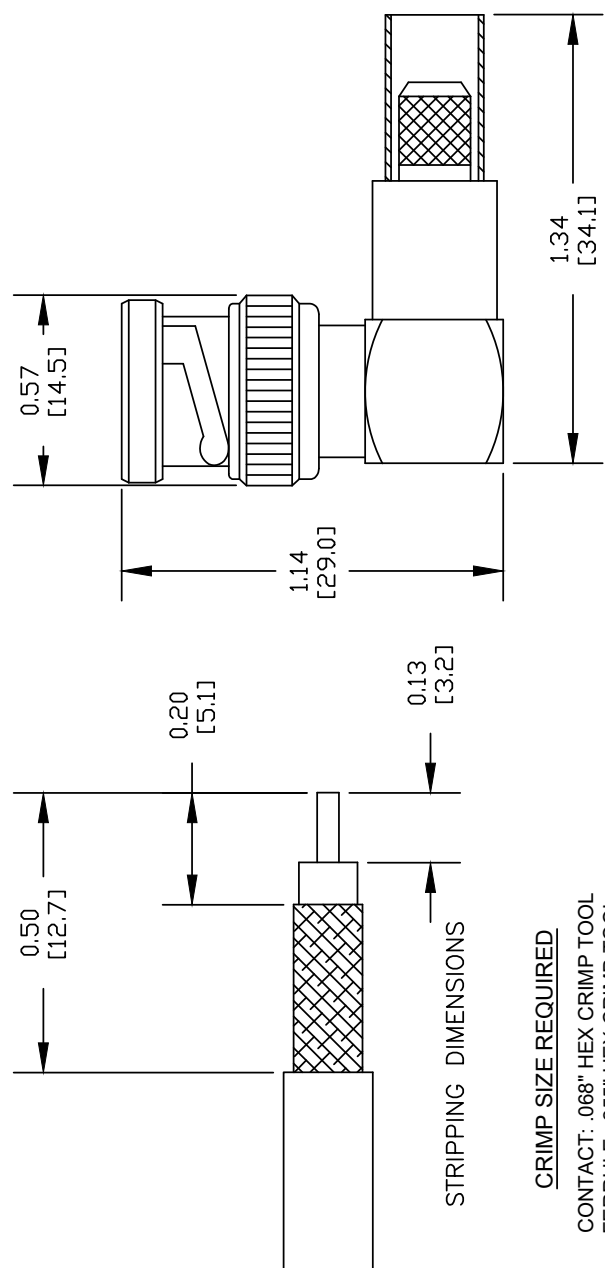

|                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                |  |  |           |        |                                                                                                                                                                                                                                |     |      |   |      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------|--|--|-----------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|---|------|
| <div><div> <b>PASTERNAK®</b></div><div>Pasternack Enterprises, Inc.</div><div>P.O. Box 16759   Irvine   CA   92623</div><div>Phone: (949) 261-1920   Fax: (949) 261-7451</div><div>Website: <a href="http://www.pasternack.com">www.pasternack.com</a>   E-Mail: <a href="mailto:sales@pasternack.com">sales@pasternack.com</a></div></div> |  |                |  |  | DWG TITLE |        | NOTES:<br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES [mm].<br>4. FITS MIL-C-17 AND EQUIVALENT CABLES. |     |      |   |      |
| PE4608                                                                                                                                                                                                                                                                                                                                                                                                                           |  | FSCM NO. 53919 |  |  | CAD FILE  | 052402 | SCALE                                                                                                                                                                                                                          | N/A | SIZE | A | XXXX |

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

## 75 Ohm BNC Female Bulkhead Mount Connector Crimp/Solder Attachment for RG59B/U, RG62, RG71, .480 inch D Hole

### PE4638



#### Configuration

- BNC Female Connector
- 75 Ohms
- Straight Body Geometry
- Connector Interface Types: RG59B/U, RG62, RG71
- Bulkhead

#### Features

- Max. Operating Frequency 1 GHz
- Gold Plated Brass Contact
- 30 µin minimum contact plating

#### Applications

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies
- CATV

#### Description

Pasternack's PE4638 , BNC, Standard, Connector is part of our full line of RF components available for same-day shipping. Our BNC female connector operates up to a maximum frequency of 1 GHz. This BNC bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our 75 ohm BNC female bulkhead connector PE4638 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

| Description            | Minimum | Typical | Maximum | Units |
|------------------------|---------|---------|---------|-------|
| Frequency Range        | DC      |         | 1,000   | MHz   |
| Operating Voltage (AC) |         |         | 500     | Vrms  |
| Impedance              |         | 75      |         | Ohms  |

#### Mechanical Specifications

##### Size

|        |                     |
|--------|---------------------|
| Length | 1.24 in [31.5 mm]   |
| Width  | 0.689 in [17.50 mm] |
| Height | 0 in [0 mm]         |
| Weight | 0.043 lbs [19.5 g]  |

#### Material Specifications

| Description | Material | Plating                   |
|-------------|----------|---------------------------|
| Contact     | Brass    | Gold<br>30 µin minimum    |
| Insulation  | PTFE     |                           |
| Body        | Brass    | Nickel<br>100 µin minimum |

## 75 Ohm BNC Female Bulkhead Mount Connector Crimp/Solder Attachment for RG59B/U, RG62, RG71, .480 inch D Hole

**PE4638**



### Environmental Specifications

**Temperature**

Operating Range

-65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

75 Ohm BNC Female Bulkhead Mount Connector Crimp/Solder Attachment for RG59B/U, RG62, RG71, .480 inch D Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Female Bulkhead Mount Connector Crimp/Solder Attachment for RG59B/U, RG62, RG71, .480 inch D Hole PE4638](#)

URL: <https://www.pasternack.com/bnc-female-rg59b-u-rg62-rg71-connector-pe4638-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.



## 75 Ohm Flexible RG59 Coax Cable Single Shielded with Black PVC (NC) Jacket

### RF Cables Technical Data Sheet

**RG59B/U**

#### Configuration

- Flexible Cable
- 1 Shield(s)

#### Electrical Specifications

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 1,000   | MHz          |
| Impedance               |         | 75.3         |         | Ohms         |
| Velocity of Propagation |         | 66           |         | %            |
| Operating Voltage (AC)  |         |              | 2,300   | Vrms         |
| Nominal Capacitance     |         | 20.4 [66.93] |         | pF/ft [pF/m] |

#### Performance by Frequency Band

| Description      | F1   | F2    | F3    | F4    | F5    | Units    |
|------------------|------|-------|-------|-------|-------|----------|
| Frequency        | 100  | 200   | 550   | 800   | 1,000 | MHz      |
| Attenuation, Max | 3.81 | 5.37  | 9.18  | 11.21 | 12.68 | dB/100ft |
|                  | 12.5 | 17.62 | 30.12 | 36.78 | 41.6  | dB/100m  |

#### Mechanical Specifications

|          |                          |
|----------|--------------------------|
| Diameter | 0.242 in [6.15 mm]       |
| Weight   | 0.039 lbs/ft [0.06 Kg/m] |

#### Construction Specifications

| Description     | Material and Plating           | Diameter         |
|-----------------|--------------------------------|------------------|
| Inner Conductor | Copper Clad Steel <sup>1</sup> | 0.022 in 0.56 mm |
| Conductor Type  | Solid                          |                  |
| Dielectric      | PE                             | 0.146 in 3.71 mm |
| First Shield    | Copper Braid                   | 0.165 in 4.19 mm |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm Flexible RG59 Coax Cable Single Shielded with Black PVC \(NC\) Jacket RG59B/U](#)

## 75 Ohm Flexible RG59 Coax Cable Single Shielded with Black PVC (NC) Jacket

### RF Cables Technical Data Sheet

**RG59B/U**

|        |                 |                    |
|--------|-----------------|--------------------|
| Jacket | PVC (NC), Black | 0.242 in [6.15 mm] |
|--------|-----------------|--------------------|

#### Environmental Specifications

##### Temperature

Operating Range

-25 to +70 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

75 Ohm Flexible RG59 Coax Cable Single Shielded with Black PVC (NC) Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm Flexible RG59 Coax Cable Single Shielded with Black PVC \(NC\) Jacket RG59B/U](#)

URL: <https://www.pasternack.com/flexible-0.242-rg59-75-ohm-coax-cable-pvc-jacket-rg59b-u-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

RG59B/U CAD Drawing

75 Ohm Flexible RG59 Coax Cable Single Shielded with Black PVC (NC) Jacket

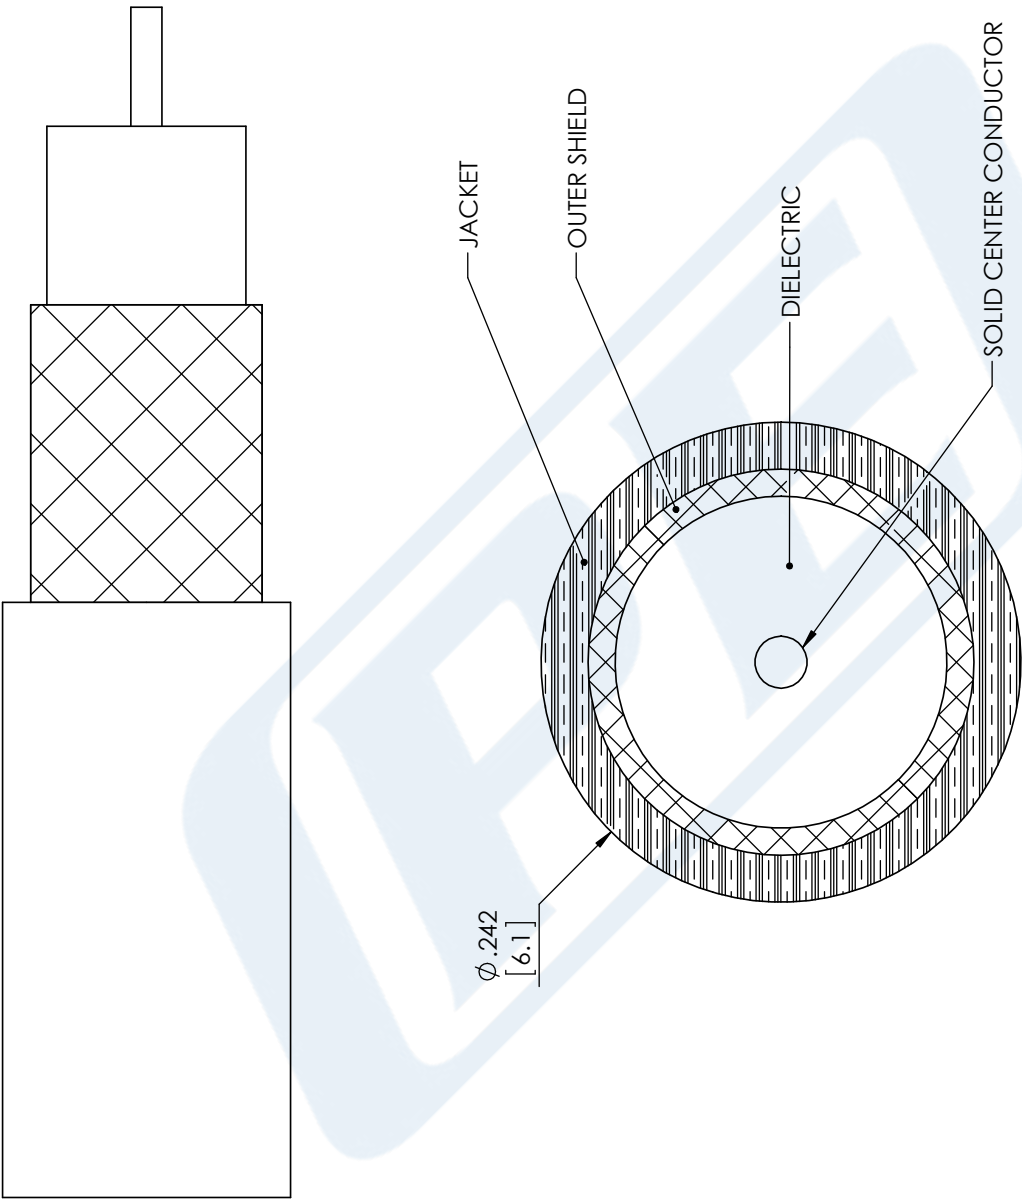

STANDARD TOLERANCES

.X  $\pm 0.2$   
.XX  $\pm 0.01$   
.XXX  $\pm 0.005$

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

RG59B/U

CAGE CODE 53919

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 11/28/17

SCALE N/A

SIZE A

CN2245