



SMA Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch

## RF Connectors Technical Data Sheet

**PE44668**

### Configuration

- SMA Male Connector
- 50 Ohms
- Straight Body Geometry
- PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch Interface Type
- Crimp/Solder Attachment
- 5/16 inch Hex

### Features

- Max. Operating Frequency 12.4 GHz
- Gold Plated Brass Contact

### Applications

- General Purpose Test
- Custom Cable Assemblies

### Description

Pasternack's PE44668 SMA male connector with crimp/solder attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF and 0.400 inch is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 12.4 GHz.

Our SMA male connector PE44668 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

### Electrical Specifications

| Description     | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | DC      |         | 12.4    | GHz   |

### Mechanical Specifications

|               |                                 |
|---------------|---------------------------------|
| <b>Size</b>   |                                 |
| Length        | 1.74 in [44.2 mm]               |
| Width/Dia.    | 0.705 in [17.91 mm]             |
| Weight        | 0.07 lbs [31.75 g]              |
| Mating Torque | 3 to 5 in-lbs [0.34 to 0.57 Nm] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch PE44668](#)



SMA Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch

## RF Connectors Technical Data Sheet

**PE44668**

### Material Specifications

| Description  | Material | Plating |
|--------------|----------|---------|
| Contact      | Brass    | Gold    |
| Insulation   | PTFE     |         |
| Body         | Brass    | Gold    |
| Coupling Nut | Brass    | Gold    |

### Environmental Specifications

#### Temperature

Operating Range -65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

SMA Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch PE44668](#)

URL: <https://www.pasternack.com/sma-male-standard-pe-c400-0.400-connector-pe44668-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE44668 CAD Drawing

SMA Male Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch

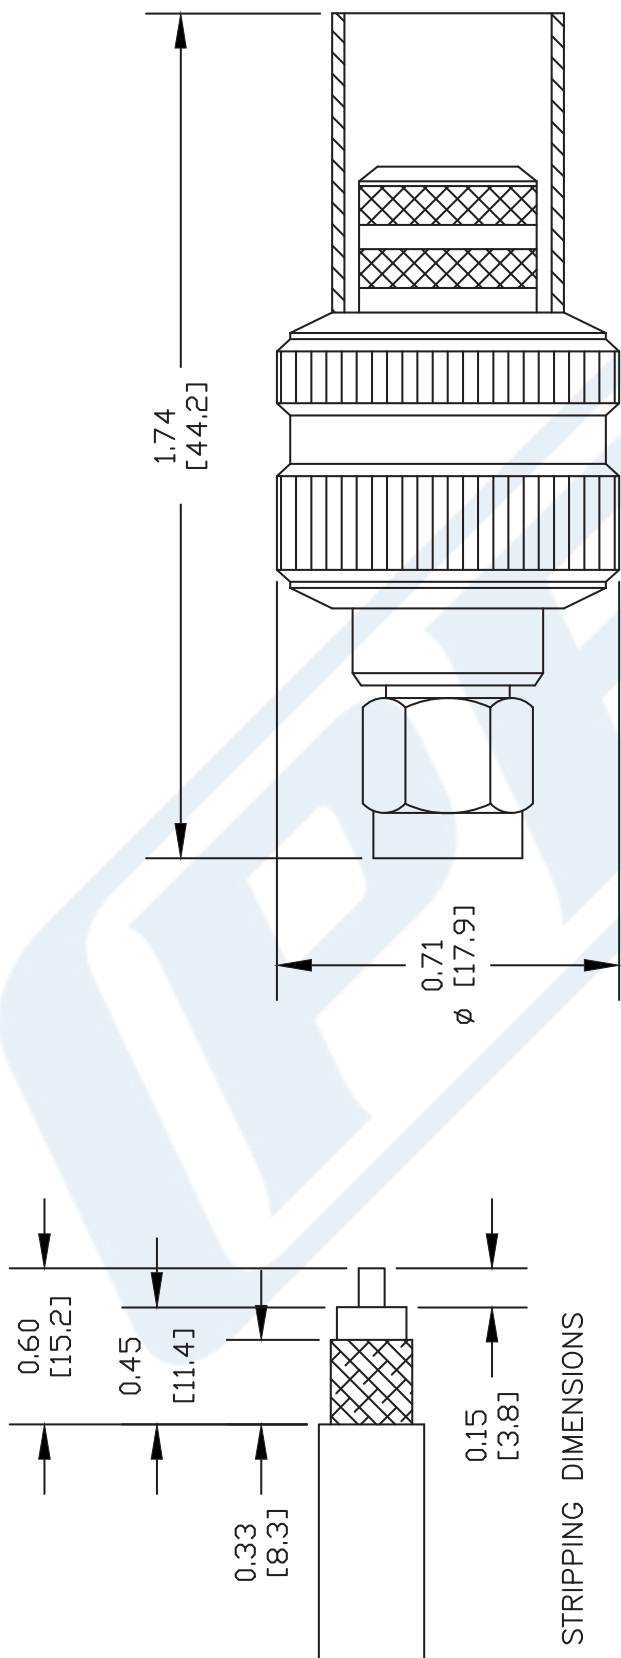

CRIMP SIZE REQUIRED

CONTACT: SOLDER  
FERRULE: .429" HEX CRIMP TOOL

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE  
**PE44668**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

|        |                |                 |           |        |     |
|--------|----------------|-----------------|-----------|--------|-----|
| REV. - | FSCM NO. 53919 | CAD FILE 102009 | SCALE N/A | SIZE A | 147 |
|--------|----------------|-----------------|-----------|--------|-----|



N Male Right Angle Connector Crimp/Solder  
Attachment for PE-C400, PE-B400, PE-B405, LMR-  
400, LMR-400-DB, LMR-400-UF, 0.400 inch

## RF Connectors Technical Data Sheet

**PE44526**

### Configuration

- N Male Connector
- MIL-STD-348A
- 50 Ohms
- Right Angle Body Geometry
- PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch Interface Type
- Crimp/Solder Attachment

### Features

- Max. Operating Frequency 11 GHz
- Good VSWR of 1.5:1
- Gold Plated Brass Contact
- 30 µin minimum contact plating

### Applications

- General Purpose Test
- Custom Cable Assemblies

### Description

Pasternack's PE44526 type N male right angle connector with crimp/solder attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF and 0.400 inch is part of our full line of RF components available for same-day shipping. Our type N male connector operates up to a maximum frequency of 11 GHz and offers good VSWR of 1.5:1. Its right angle body geometry allows for easier connections in tight spaces.

Our type N male right angle connector PE44526 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

### Electrical Specifications

| Description                          | Minimum | Typical | Maximum | Units |
|--------------------------------------|---------|---------|---------|-------|
| Frequency Range                      | DC      |         | 11      | GHz   |
| VSWR                                 |         |         | 1.5:1   |       |
| Operating Voltage (AC)               |         |         | 1,500   | Vrms  |
| Dielectric Withstanding Voltage (AC) |         |         | 2,500   | Vrms  |
| Inner Conductor DC Resistance        |         |         | 1       | mOhms |
| Outer Conductor DC Resistance        |         |         | 1       | mOhms |
| Insulation Resistance                | 5,000   |         |         | MOhms |
| RF Leakage                           | 90      |         |         | dB    |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch PE44526](#)



N Male Right Angle Connector Crimp/Solder  
Attachment for PE-C400, PE-B400, PE-B405, LMR-  
400, LMR-400-DB, LMR-400-UF, 0.400 inch

## RF Connectors Technical Data Sheet

**PE44526**

### Performance by Frequency

| Description         | F1       | F2 | F3 | F4 | F5 | Units |
|---------------------|----------|----|----|----|----|-------|
| Frequency Range     | DC to 10 |    |    |    |    | GHz   |
| Insertion Loss, Max | 0.15     |    |    |    |    | dB    |

### Mechanical Specifications

#### Size

|               |                     |
|---------------|---------------------|
| Length        | 1.31 in [33.27 mm]  |
| Width/Dia.    | 0.83 in [21.08 mm]  |
| Height        | 1.31 in [33.27 mm]  |
| Weight        | 0.109 lbs [49.44 g] |
| Mating Cycles | 500 Cycles          |

### Material Specifications

| Description  | Material | Plating                |
|--------------|----------|------------------------|
| Contact      | Brass    | Gold<br>30 µin minimum |
| Insulation   | PTFE     |                        |
| Body         | Brass    | Tri-Metal              |
| Coupling Nut | Brass    | Tri-Metal              |

### Environmental Specifications

#### Temperature

|                   |                                      |
|-------------------|--------------------------------------|
| Operating Range   | -65 to +165 deg C                    |
| Vibration         | MIL-STD-202, Method 204, Condition B |
| Temperature Cycle | MIL-STD-202, Method 107, Condition B |
| Salt Spray        | MIL-STD-202, Method 101, Condition B |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch PE44526](#)



N Male Right Angle Connector Crimp/Solder  
Attachment for PE-C400, PE-B400, PE-B405, LMR-  
400, LMR-400-DB, LMR-400-UF, 0.400 inch

## RF Connectors Technical Data Sheet

**PE44526**

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

N Male Right Angle Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch PE44526](#)

URL: <https://www.pasternack.com/n-male-standard-pe-c400-0.400-connector-pe44526-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE44526 CAD Drawing

N Male Right Angle Connector Crimp/Solder Attachment for PE-C400, PE-B400, PE-B405, LMR-400, LMR-400-DB, LMR-400-UF, 0.400 inch

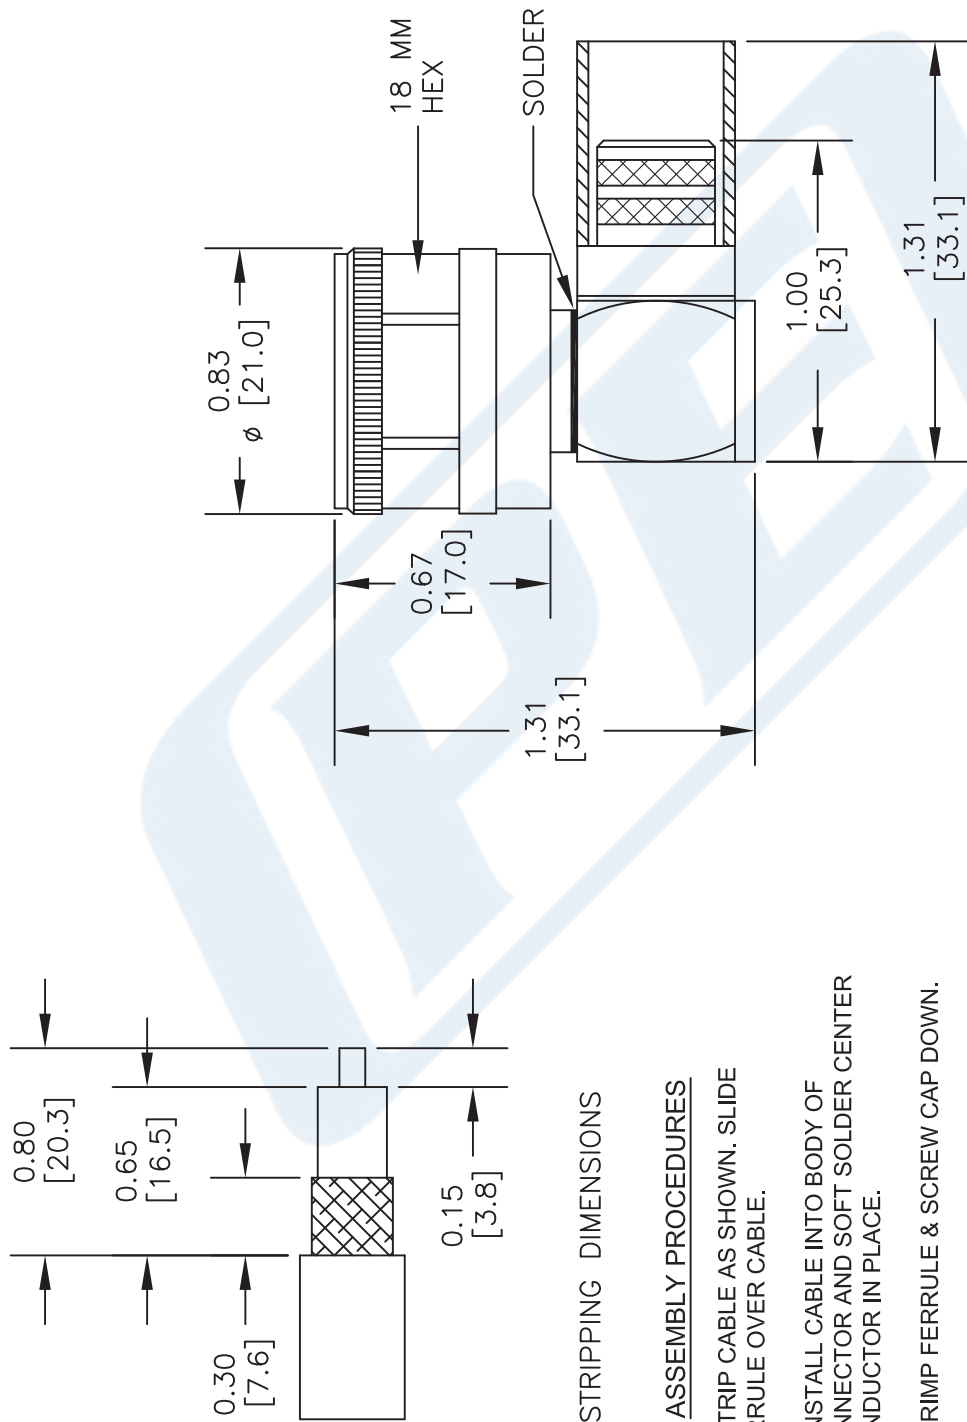

## STRIPPING DIMENSIONS

## ASSEMBLY PROCEDURES

1. STRIP CABLE AS SHOWN. SLIDE FERRULE OVER CABLE.
2. INSTALL CABLE INTO BODY OF CONNECTOR AND SOLDER CENTER CONDUCTOR IN PLACE.
3. CRIMP FERRULE & SCREW CAP DOWN.

## CRIMP SIZE REQUIRED

FERRULE: .429" HEX CRIMP TOOL



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

PE44526

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 040416

SCALE N/A

SIZE A

3045

# LMR<sup>®</sup>-400 Flexible Low Loss Communications Coax

## Ideal for...

- Drop-in replacement for RG-8/9913 Air-Dielectric type Cable
- Jumper Assemblies in Wireless Communications Systems
- Short Antenna Feeder runs
- Any application (e.g. WLL, GPS, LMR, WLAN, WISP, WiMax, SCADA, Mobile Antennas) requiring an easily routed, low loss RF cable



• **LMR<sup>®</sup>** standard is a UV Resistant Polyethylene jacketed cable designed for 20-year service outdoor use. The bending and handling characteristics are significantly better than air-dielectric and corrugated hard-line cables.

• **LMR<sup>®</sup>-DB** is identical to standard LMR plus has the advantage of being watertight. The addition of waterproofing compound in and around the foil/braid insures continuous reliable service should the jacket be inadvertently damaged during installation or in the future.

• **LMR<sup>®</sup>-FR** is a non-halogen (non-toxic), low smoke, fire retardant cable designed for in-building runs that can be routed anywhere except air handling plenums. LMR-FR is UL/NEC & CSA rated 'CMR' and 'FT4' respectively, meets FAA FAR25 requirements and is MSHA-P for mining applications.

• **LMR<sup>®</sup>-FR-PVC** is a general-purpose indoor cable and has a UL/NEC & CSA rating of 'CMR' and 'FT4' respectively. It is less expensive than LMR-FR, however it emits toxic fumes (HCL) and greater smoke density when burned.

• **LMR<sup>®</sup>-PVC** is designed for low loss general-purpose applications and is somewhat more flexible than the standard polyethylene jacketed LMR.

• **LMR<sup>®</sup>-PVC-W** is a white-jacketed version of LMR-PVC for marine and other applications where color compatibility is desired.

• **Flexibility** and bendability are hallmarks of the LMR-400 cable design. The flexible outer conductor enables the tightest bend radius available for any cable of similar size and performance.

• **Low Loss** is another hallmark feature of LMR-400.

Size for size LMR has the lowest loss of any flexible cable and comparable loss to semirigid hard-line cables.

• **RF Shielding** is 50 dB greater than typical single shielded coax (40 dB). The multi-ply bonded foil outer conductor is rated conservatively at > 90 dB (i.e. >180 dB between two adjacent cables).

• **Weatherability:** LMR-400 cables designed for outdoor exposure incorporate the best materials for UV resistance and have life expectancy in excess of 20 years.

• **Connectors:** A wide variety of connectors are available for LMR-400 cable, including all common interface types, reverse polarity, and a choice of solder or non-solder center pins. Most LMR connectors employ crimp outer attachment using standard hex crimp sizes.

• **Cable Assemblies:** All LMR-400 cable types are available as pre-terminated cable assemblies. Refer to the section on FlexTech for further details.

| Part Description |                      |           |       |  | Stock |
|------------------|----------------------|-----------|-------|--|-------|
| Part Number      | Application          | Jacket    | Color |  | Code  |
| LMR-400          | Outdoor              | PE        | Black |  | 54001 |
| LMR-400-DB       | Outdoor/Watertight   | PE        | Black |  | 54091 |
| LMR-400-FR       | Indoor/Outdoor Riser | CMR FRPE  | Black |  | 54030 |
| LMR-400-FR-PVC   | Indoor/Outdoor Riser | CMR FRPVC | Black |  | 54073 |
| LMR-400-PVC      | General Purpose      | PVC       | Black |  | 54218 |
| LMR-400-PVC-W    | General Purpose      | PVC       | White |  | 54204 |

| Construction Specifications |                   |       |         |
|-----------------------------|-------------------|-------|---------|
| Description                 | Material          | In.   | (mm)    |
| Inner Conductor             | Solid BCCAI       | 0.108 | (2.74)  |
| Dielectric                  | Foam PE           | 0.285 | (7.24)  |
| Outer Conductor             | Aluminum Tape     | 0.291 | (7.39)  |
| Overall Braid               | Tinned Copper     | 0.320 | (8.13)  |
| Jacket                      | (see table above) | 0.405 | (10.29) |

# LMR®-400 Flexible Low Loss Communications Coax



## Connectors

|           |                 |                  |                   |                       |                 |           | Inner         | Outer   | Finish*   |                   |                  |                 |  |  |  |
|-----------|-----------------|------------------|-------------------|-----------------------|-----------------|-----------|---------------|---------|-----------|-------------------|------------------|-----------------|--|--|--|
| Interface | Description     | Part Number      | Stock Code        | VSWR**<br>Freq. (GHz) | Coupling<br>Nut | Contact   | Contact       | Contact | Body /Pin | Length<br>in (mm) | Width<br>in (mm) | Weight<br>lb(g) |  |  |  |
|           | 7-16 DIN Female | Straight Jack    | TC-400-716-FC     | 3190-376              | <1.25:1 (2.5)   | NA        | Solder        | Clamp   | S/S       | 1.6 (41)          | 1.13 (28.7)      | 0.281 (127.5)   |  |  |  |
|           | 7-16 DIN Male   | Straight Plug    | EZ-400-716M-X     | 3190-2524             | <1.25:1 (6)     | Hex       | Spring Finger | Crimp   | A/G       | 1.6 (39.5)        | 1.38 (35)        | 0.277 (126.0)   |  |  |  |
|           | 7-16 DIN Male   | Straight Plug    | TC-400-716-MC     | 3190-279              | <1.25:1 (2.5)   | Hex       | Solder        | Clamp   | S/S       | 1.4 (36)          | 1.40 (35.6)      | 0.268 (121.6)   |  |  |  |
|           | 7-16 DIN Male   | Right Angle      | TC-400-716MC-RA   | 3190-1671             | <1.25:1 (<3)    | Hex       | Solder        | Clamp   | A/S       | 2.4 (61.5)        | 1.88 (47.8)      | 0.35 (159)      |  |  |  |
|           | 7-16DIN Male    | Right Angle      | EZ-400-716M-RA-X  | 3190-2545             | <1.35:1 (6)     | Hex       | Spring Finger | Crimp   | A/G       | 1.6 (41.7)        | 1.75 (44.3)      | 0.374 (0.17)    |  |  |  |
|           | BNC Male        | Straight Plug    | TC-400-BM         | 3190-318              | <1.25:1 (2.5)   | Knurl     | Solder        | Crimp   | N/S       | 1.7 (43)          | 0.56 (14.2)      | 0.063 (28.6)    |  |  |  |
|           | HN Male         | Straight Plug    | TC-400-HNM        | 3190-923              | <1.25:1 (<1)    | Knurl     | Solder        | Clamp   | S/G       | 2.3 (59.2)        | 0.88 (22.4)      | 0.25 (113.4)    |  |  |  |
|           | HN Male         | Right Angle      | TC-400-HNM-RA     | 3190-2541             | <1.25:1 (2.5)   | Hex       | Solder        | Crimp   | A/G       | 1.6 (41.4)        | 1.56 (39.6)      | 0.198 (90.0)    |  |  |  |
|           | QDS Male        | Straight Plug    | TC-400-QDSM       | 3190-620              | <1.25:1 (<3)    | Knurl     | Solder        | Clamp   | A/G       | 1.8 (46.6)        | 1.00 (25.4)      | 0.25 (113.4)    |  |  |  |
|           | Mini-UHF        | Straight Plug    | TC-400-MUHF       | 3190-520              | <1.25:1 (2.5)   | Knurl     | Solder        | Crimp   | N/G       | 1.1 (28)          | 0.50 (12.7)      | 0.020 (9.1)     |  |  |  |
|           | N Female        | Straight Jack    | TC-400-NFC        | 3190-299              | <1.25:1 (2.5)   | NA        | Solder        | Clamp   | N/S       | 1.6 (41)          | 0.75 (19.1)      | 0.119 (54.0)    |  |  |  |
|           |                 | Straight Jack    | EZ-400-NF         | 3190-956              | <1.25:1 (2.5)   | NA        | Spring Finger | Crimp   | N/G       | 1.8 (45)          | 0.66 (16.8)      | 0.105 (47.6)    |  |  |  |
|           |                 | Straight Jack    | TC-400-NF         | 3190-2255             | <1.25:1 (2.5)   | NA        | Solder        | Crimp   | N/G       | 1.8 (45)          | 0.66 (16.8)      | 0.105 (47.6)    |  |  |  |
|           |                 | Bulkhead Jack    | EZ-400-NF-BH      | 3190-518*             | <1.25:1 (2.5)   | NA        | Spring Finger | Crimp   | N/G       | 1.8 (46)          | 0.88 (22.4)      | 0.102 (46.3)    |  |  |  |
|           |                 | Bulkhead Jack    | TC-400-NFC-BH (A) | 3190-872              | <1.25:1 (2.5)   | NA        | Solder        | Clamp   | A/G       | 1.8 (46)          | 0.88 (22.4)      | 0.145 (65.8)    |  |  |  |
|           | N Male          | Straight Plug    | SC-400-NM         | 3190-1454             | <1.25:1 (2.5)   | Knurl     | Solder        | Crimp   | N/G       | 1.5 (38)          | 0.75 (19.1)      | 0.090 (40.8)    |  |  |  |
|           |                 | Straight Plug    | TC-400-NMC        | 3190-277              | <1.25:1 (2.5)   | Knurl     | Solder        | Clamp   | N/G       | 1.5 (38)          | 0.70 (17.8)      | 0.121 (54.9)    |  |  |  |
|           |                 | Straight Plug    | EZ-400-NMC-2      | 3190-2640             | <1.25:1 (2.5)   | Hex/Knurl | Spring Finger | Crimp   | N/G       | 1.5 (38)          | 0.75 (19.1)      | 0.121 (54.9)    |  |  |  |
|           |                 | Straight Plug    | EZ-400-NMH-X      | 3190-2590             | <1.25:1 (10)    | Hex/Knurl | Spring Finger | Crimp   | A/G       | 1.5 (38)          | 0.89 (22.6)      | 0.103 (46.8)    |  |  |  |
|           |                 | Straight Plug    | TC-400-NMH-X      | 3190-2626             | <1.25:1 (10)    | Hex/Knurl | Solder        | Crimp   | A/G       | 1.5 (38)          | 0.89 (22.6)      | 0.113 (51.3)    |  |  |  |
|           |                 | Straight Plug    | EZ-400-NMK        | 3190-661              | <1.25:1 (10)    | Knurl     | Spring Finger | Crimp   | S/G       | 1.5 (38)          | 0.75 (22.6)      | 0.113 (51.3)    |  |  |  |
|           |                 | Right Angle      | EZ-400-NMH-RA-X   | 3190-2638             | <1.35:1 (6)     | Hex/Knurl | Spring Finger | Crimp   | A/G       | 1.87 (47)         | 1.42 (36.0)      | 0.177 (80.2)    |  |  |  |
|           |                 | Right Angle      | TC-400-NMH-RA-D   | 3190-2293*            | <1.35:1 (6)     | Hex/Knurl | Solder        | Crimp   | A/G       | 1.8 (46)          | 1.25 (31.8)      | 0.130 (59.0)    |  |  |  |
|           |                 | Right Angle      | TC-400-NMC-RA (A) | 3190-870              | <1.35:1 (2.5)   | Hex       | Solder        | Clamp   | A/G       | 1.8 (46)          | 1.25 (31.8)      | 0.150 (68.0)    |  |  |  |
|           |                 | Reverse Polarity | TC-400-NM-RP      | 3190-960              | <1.25:1 (2.5)   | Knurl     | Solder        | Crimp   | N/G       | 1.5 (38)          | 0.75 (19.1)      | 0.090 (40.8)    |  |  |  |
|           | SMA Male        | Straight Plug    | TC-400-SM         | 3190-439              | <1.25:1 (8)     | Hex       | Solder        | Crimp   | N/G       | 1.2 (29)          | 0.50 (12.7)      | 0.032 (14.5)    |  |  |  |
|           | TNC Female      | Reverse Polarity | TC-400-TF-RP      | 3190-1063             | <1.25:1 (2.5)   | NA        | Solder        | Crimp   | N/G       | 1.8 (46)          | 0.55 (14.0)      | 0.074 (33.6)    |  |  |  |
|           |                 | Reverse Polarity | EZ-400-TF-RP      | 3190-795              | <1.25:1 (2.5)   | NA        | Spring Finger | Crimp   | A/G       | 1.8 (46)          | 0.55 (14.0)      | 0.074 (33.6)    |  |  |  |
|           | TNC Male        | Straight Plug    | TC-400-TM-X       | 3190-2532             | <1.25:1 (6)     | Hex/Knurl | Solder        | Crimp   | A/G       | 1.9 (48)          | 0.67 (17.5)      | 0.075 (34.3)    |  |  |  |
|           |                 | Straight Plug    | EZ-400-TM-X       | 3190-2533             | <1.25:1 (6)     | Hex/Knurl | Spring Finger | Crimp   | A/G       | 1.9 (48)          | 0.67 (17.5)      | 0.075 (34.3)    |  |  |  |
|           |                 | Right Angle      | TC-400-TM-RA      | 3190-442*             | <1.35:1 (2.5)   | Knurl     | Solder        | Crimp   | N/G       | 1.7 (43)          | 0.59 (15.0)      | 0.085 (38.6)    |  |  |  |
|           |                 | Reverse Polarity | TC-400-TM-RP      | 3190-1062             | <1.25:1 (2.5)   | Knurl     | Solder        | Crimp   | N/G       | 1.7 (43)          | 0.59 (15.0)      | 0.074 (33.6)    |  |  |  |
|           |                 | Reverse Polarity | EZ-400-TM-RP      | 3190-794              | <1.25:1 (2.5)   | Knurl     | Spring Finger | Crimp   | A/G       | 1.7 (43)          | 0.59 (15.0)      | 0.074 (33.6)    |  |  |  |