


NOTICE OF PROPRIETARY RIGHTS THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

| SYM | REVISION DESCRIPTION    | DFTM     | DATE    | APPD     | DATE    |
|-----|-------------------------|----------|---------|----------|---------|
| A   | RELEASED FOR PRODUCTION | D. J. H. | 1/13/09 | J. D. B. | 1/13/09 |

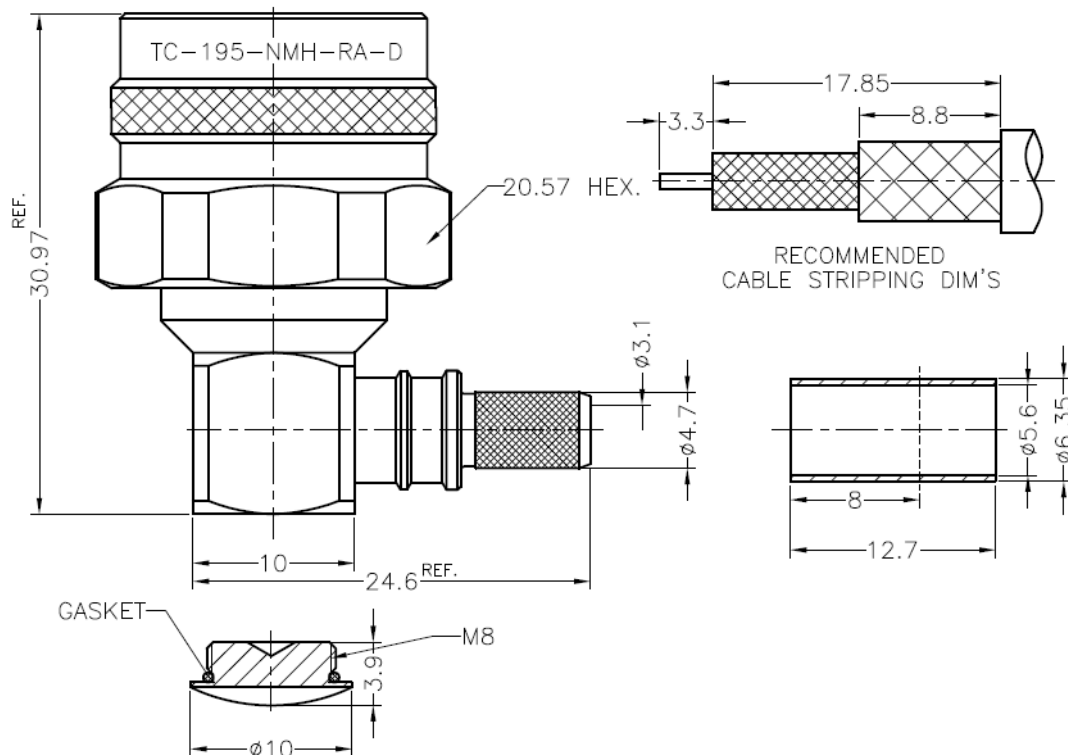

ALL PARTS SATISFIED ROHS REQUIREMENTS

NOTE:

1. CRIMP THE FERRULE TO .217" HEX.

| 材料与电镀(MATERIALS AND PLATING) |                                 | UNIT: MICRO-INCHES                            |
|------------------------------|---------------------------------|-----------------------------------------------|
| 壳体,主体<br>BODY, SHELL         | 黄铜 (BRASS C3604)<br>BRASS C3604 | 镀三元合金80μ " "<br>ALBALOY PLATING THICK 80 MIN. |
| 中心针<br>CONTACT PIN           | 黄铜 (BRASS C3604)<br>BRASS C3604 | 铜底, 镀金50μ " "<br>GOLD PL. 50/COPPER           |
| 绝缘体:<br>INSULATOR            | 聚四氟乙烯<br>TEFLON MIL-P-19468     |                                               |
| 铜管:<br>FERRULE               | 紫铜<br>COPPER                    | 镀三元合金80μ " "<br>ALBALOY PLATING THICK 80 MIN. |
| 密封圈:<br>GASKET               | 硅橡胶<br>SILICONE                 | RED OR BLACK                                  |

| 电气性能(ELECTRICAL CHARACTERISTICS)      |                                                     |
|---------------------------------------|-----------------------------------------------------|
| 特性阻抗 (Impedance)                      | 50 Ω                                                |
| 工作电压(Voltage rating)                  | 750V(rms)                                           |
| 频率范围 (Frequency range)                | 0~6GHz                                              |
| 介电耐压(Dielectric withstanding voltage) | 1000V                                               |
| 接触电阻<br>(Contact resistance)          | 内导体(Center contact): ≤3mΩ<br>外导体(Outer contact)≤2mΩ |
| 绝缘电阻<br>(Insulation resistance)       | ≥5000MΩ                                             |
| 插入损耗(Insertion loss)                  | 根据电缆特性 (According as the cable)                     |
| 射频泄漏(RF- leakage)                     | N/A                                                 |
| 电压驻波比(VSWR)                           | ≤1.2 (DC-2GHz) ≤1.3 (DC-6GHz)                       |
| 三阶互调<br>(3rd Intermodulation)         | ---                                                 |


| 环境参数(ENVIRONMENTAL CHARACTERISTICS) |                                     |
|-------------------------------------|-------------------------------------|
| 工作温度(Temperature range)             | -55? - +155?                        |
| Thermal shock                       | US MIL- STD 202, Meth. 107, Cond. B |
| Vibration                           | US MIL- STD 202, Meth. 204, Cond. B |
| Shock                               | US MIL- STD 202, Meth. 213, Cond. I |
| Climatic class                      | IEC 60068 65/165/21                 |

| 机械特性(MECHANICAL CHARACTERISTICS)     |                |
|--------------------------------------|----------------|
| 插入力(Force to engage and disengage)   | 6 lbs MAX.     |
| 中心针保持力Center contact retention force | 6 lbs MIN.     |
| 螺母拉力(Coupling torque)                | 30 in-lbs MIN. |
| 螺母拉力(Coupling nut retention force)   | 100 lbs MIN.   |
| 机械耐久性(Durability)                    | ≥ 500 cycles   |

|              |                                                                                                                                                                                                                                       |                      |                  |                                                      |                          |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|------------------------------------------------------|--------------------------|
| MATL:        | UNLESS OTHERWISE SPECIFIED                                                                                                                                                                                                            |                      | DFTM. D. J. H.   | TIMES MICROWAVE SYSTEMS                              |                          |
|              | ALL DIMENSIONS ARE IN mm<br>MACHINED SURFACES FINISH 1.6 RMS MAX.<br>REMOVE ALL BURRS 0.15X45° MAX. BREAK<br>MACHINE CORNERS 0.15X45° MAX. FILLET R.<br>TOLERANCES ON DECIMALS<br>. X ± 0.2 . XX ± 0.1<br>ANGLES ± 3° FRACTIONS ± N/A |                      | DATE 1/13/09     |                                                      |                          |
| USED ON: 0-1 |                                                                                                                                                                                                                                       |                      | CHKD. J. D. B.   | TC-195-NMH-RA-D<br>90° "N" MALE<br>FOR LMR-195 CABLE |                          |
|              |                                                                                                                                                                                                                                       |                      | DATE 1/13/09     |                                                      |                          |
|              |                                                                                                                                                                                                                                       |                      | APPD. J. D. B.   |                                                      |                          |
| SCALE: N/A   | DWG. SIZE A                                                                                                                                                                                                                           | DO NOT SCALE DRAWING | CODE IDENT 68999 | DATE 1/13/09                                         | 1 of 1 SD3190-2425 REV A |

**NOTICE OF PROPRIETARY RIGHTS** THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

| SYM | REVISION DESCRIPTION    | DFTM  | DATE    | APPD   | DATE    |
|-----|-------------------------|-------|---------|--------|---------|
| A   | RELEASED FOR PRODUCTION | N.N.N | 1/13/14 | J.D.B. | 1/13/14 |

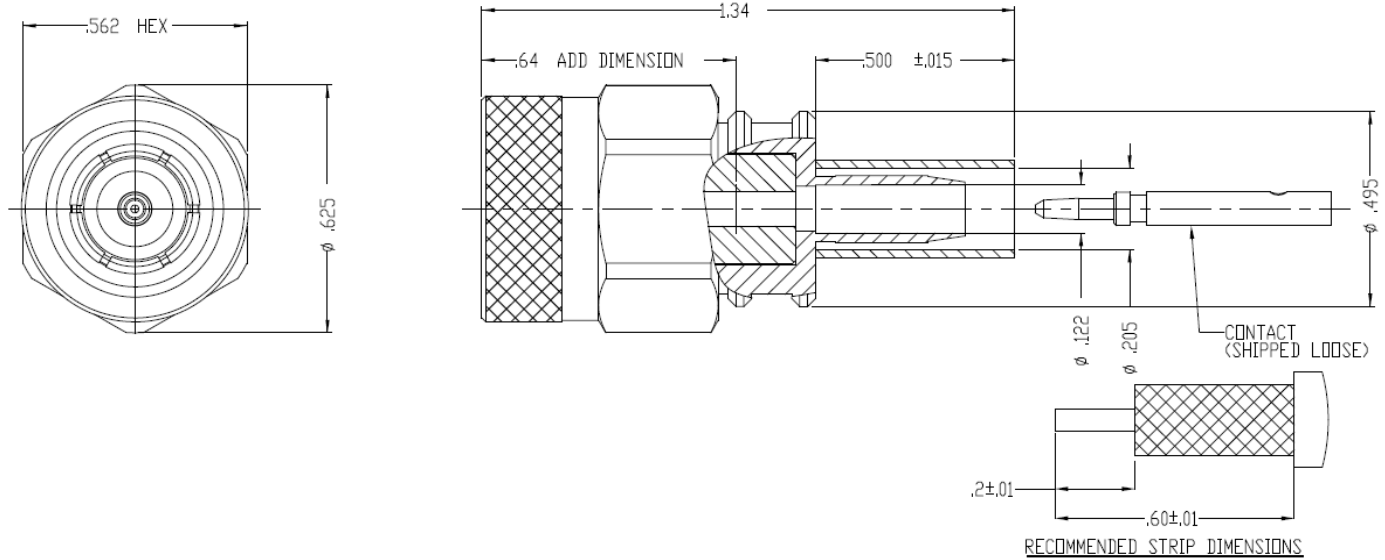

**NOTES:**

- ASSEMBLED CONNECTOR INTERFACE IS DESIGNED TO MATE WITH STANDARD QMA JACK.
- MATERIAL:  
 BODY, CONTACT, COUPLING SLEEVE - BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02  
 INSULATOR - TEFLON PER ASTM D1710, TYPE 1, GRADE 1, CLASS A  
 SHRINK SLEEVE - HEAT SHRINKABLE ATUM PER MIL-I-23053/4 (NOT SHOWN)  
 CRIMP SLEEVE - D.H.P. COPPER CDA, ALLOY #122, TEMPER HARD  
 FINGERS - BERYLLIUM COPPER PER ASTM B196, C17300 ALLOY, CONDITION HT
- FINISH:  
 CONTACT - GOLD PLATE PER ASTM B488  
 ALL OTHER METAL PARTS - SILVER PLATE PER ASTM B700

|                |  |                                                                                                                                                                                                                                    |  |                                                       |  |                         |  |              |  |              |  |             |  |       |  |
|----------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------|--|-------------------------|--|--------------|--|--------------|--|-------------|--|-------|--|
| MATL:          |  | UNLESS OTHERWISE SPECIFIED                                                                                                                                                                                                         |  | DFTM. N. N. N                                         |  | TIMES MICROWAVE SYSTEMS |  |              |  |              |  |             |  |       |  |
|                |  | ALL DIMENSIONS ARE IN INCHES<br>MACHINED SURFACES FINISH 63 RMS MAX.<br>REMOVE ALL BURRS .004 MAX. BREAK<br>MACHINE CORNERS .005 MAX. FILLET R.<br>TOLERANCES ON DECIMALS<br>.XX ± .01 .XXX ± .005<br>ANGLES ± 1° FRACTIONS ± 1/64 |  | DATE 1/13/14                                          |  |                         |  |              |  |              |  |             |  |       |  |
| CHKD. J. D. B. |  |                                                                                                                                                                                                                                    |  | TC-195-TM-X<br>CONNECTOR ASSEMBLY<br>TNCM for LMR-195 |  |                         |  |              |  |              |  |             |  |       |  |
| DATE 1/13/14   |  |                                                                                                                                                                                                                                    |  |                                                       |  |                         |  |              |  |              |  |             |  |       |  |
| APPD. J. D. B. |  |                                                                                                                                                                                                                                    |  |                                                       |  |                         |  |              |  |              |  |             |  |       |  |
| USED ON: A     |  |                                                                                                                                                                                                                                    |  | DATE 1/13/14                                          |  |                         |  |              |  |              |  |             |  |       |  |
| SCALE: NONE    |  | DWG. SIZE A                                                                                                                                                                                                                        |  | DO NOT SCALE DRAWING                                  |  | CODE IDENT 68999        |  | DATE 1/13/14 |  | SHEET 1 of 1 |  | SD3190-2879 |  | REV A |  |

# LMR®-195

## Flexible Low Loss Communications Coax

### Ideal for...

- Jumper Assemblies in Wireless Communications Systems
- Short Antenna Feeder runs
- Any application (e.g. WLL, GPS, LMR, WLAN, WISP, WiMax, SCADA, Mobile Antennas) requiring an easily routed, low loss RF cable
- Drop-in replacement for RG-58 and RG-142



• **LMR®** standard is a UV Resistant Polyethylene jacketed cable designed for 20-year service outdoor use. The bending and handling characteristics are significantly better than air-dielectric and corrugated hard-line cables.

• **LMR® - DB** is identical to standard LMR plus has the advantage of being watertight. The addition of waterproofing compound in and around the foil/braid insures continuous reliable service should the jacket be inadvertently damaged during installation or in the future.

• **LMR® - FR** is a non-halogen (non-toxic), low smoke, fire retardant cable designed for in-building runs that can be routed anywhere except air handling plenums. LMR-FR is UL/NEC & CSA rated 'CMR' and 'FT4' respectively, meets FAA FAR25 requirements and is MSHA-P for mining applications.

• **LMR® - FR-PVC** is a general-purpose indoor cable and has a UL/NEC & CSA rating of 'CMR' and 'FT4' respectively. It is less expensive than LMR-FR, however it emits toxic fumes (HCL) and greater smoke density when burned.

• **LMR® - PVC** is designed for low loss general-purpose applications and is somewhat more flexible than the standard polyethylene jacketed LMR.

• **LMR® - PVC-W** is a white-jacketed version of LMR-PVC for marine and other applications where color compatibility is desired.

• **LMR® - MA** is a flexible cable designed specifically for mobile antenna applications. It has a PVC jacket and un-bonded aluminum tape to facilitate end stripping with automated equipment.

• **Flexibility** and bendability are hallmarks of the LMR-195 cable design. The flexible outer conductor enables the tightest bend radius available for any cable of similar size and performance.

• **Low Loss** is another hallmark feature of LMR-195. Size for size LMR has the lowest loss of any flexible cable and comparable loss to semirigid hard-line cables.

• **RF Shielding** is 50 dB greater than typical single shielded coax (40 dB). The multi-ply bonded foil outer conductor is rated conservatively at > 90 dB (i.e. >180 dB between two adjacent cables).

• **Weatherability:** LMR-195 cables designed for outdoor exposure incorporate the best materials for UV resistance and have life expectancy in excess of 20 years.

• **Connectors:** A wide variety of connectors are available for LMR-195 cable, including all common interface types, reverse polarity, and a choice of solder or non-solder center pins. Most LMR connectors employ crimp outer attachment using standard hex crimp sizes.

• **Cable Assemblies:** All LMR-195 cable types are available as pre-terminated cable assemblies. Refer to the section on FlexTech for further details.

| Part Description |                          |        |       | Stock |
|------------------|--------------------------|--------|-------|-------|
| Part Number      | Application              | Jacket | Color | Code  |
| LMR-195          | Outdoor                  | PE     | Black | 54110 |
| LMR-195-DB       | Outdoor/Watertight       | PE     | Black | 54113 |
| LMR-195-FR       | Indoor/Outdoor Riser CMR | FRPE   | Black | 54111 |
| LMR-195-FR-W     | Indoor/Outdoor Riser CMR | FRPE   | White | 54158 |
| LMR-195-FR-PVC   | Indoor/Outdoor Riser CMR | FRPVC  | Black | 54105 |
| LMR-195-MA       | Mobile Antennas          | PVC    | Black | 54210 |
| LMR-195-PVC      | General Purpose          | PVC    | Black | 54215 |
| LMR-195-PVC-W    | General Purpose          | PVC    | White | 54199 |

| Construction Specifications |                   |       |        |
|-----------------------------|-------------------|-------|--------|
| Description                 | Material          | In.   | (mm)   |
| Inner Conductor             | Solid BC          | 0.037 | (0.94) |
| Dielectric                  | Foam PE           | 0.110 | (2.79) |
| Outer Conductor             | Aluminum Tape     | 0.116 | (2.95) |
| Overall Braid               | Tinned Copper     | 0.139 | (3.53) |
| Jacket                      | (see table above) | 0.195 | (4.95) |

### Mechanical Specifications

| Performance Property      | Units          | US    | (metric) |
|---------------------------|----------------|-------|----------|
| Bend Radius: installation | in. (mm)       | 0.5   | (12.7)   |
| Bend Radius: repeated     | in. (mm)       | 2.0   | (50.8)   |
| Bending Moment            | ft-lb (N-m)    | 0.2   | (0.27)   |
| Weight                    | lb/ft (kg/m)   | 0.021 | (0.03)   |
| Tensile Strength          | lb (kg)        | 40    | (18.2)   |
| Flat Plate Crush          | lb/in. (kg/mm) | 15    | (0.27)   |


### Environmental Specifications

| Performance Property           | °F       | °C      |
|--------------------------------|----------|---------|
| Installation Temperature Range | -40/+185 | -40/+85 |
| Storage Temperature Range      | -94/+185 | -70/+85 |
| Operating Temperature Range    | -40/+185 | -40/+85 |

### Electrical Specifications

| Performance Property    | Units             | US    | (metric) |
|-------------------------|-------------------|-------|----------|
| Velocity of Propagation | %                 | 76    |          |
| Dielectric Constant     | NA                | 1.56  |          |
| Time Delay              | nS/ft (nS/m)      | 1.27  | (4.17)   |
| Impedance               | ohms              | 50    |          |
| Capacitance             | pF/ft (pF/m)      | 25.4  | (83.3)   |
| Inductance              | uH/ft (uH/m)      | 0.064 | (0.21)   |
| Shielding Effectiveness | dB                | >90   |          |
| DC Resistance           |                   |       |          |
| Inner Conductor         | ohms/1000ft (/km) | 7.6   | (24.9)   |
| Outer Conductor         | ohms/1000ft (/km) | 4.9   | (16.1)   |
| Voltage Withstand       | Volts DC          | 1000  |          |
| Jacket Spark            | Volts RMS         | 3000  |          |
| Peak Power              | kW                | 2.5   |          |

### Attenuation vs. Frequency (typical)

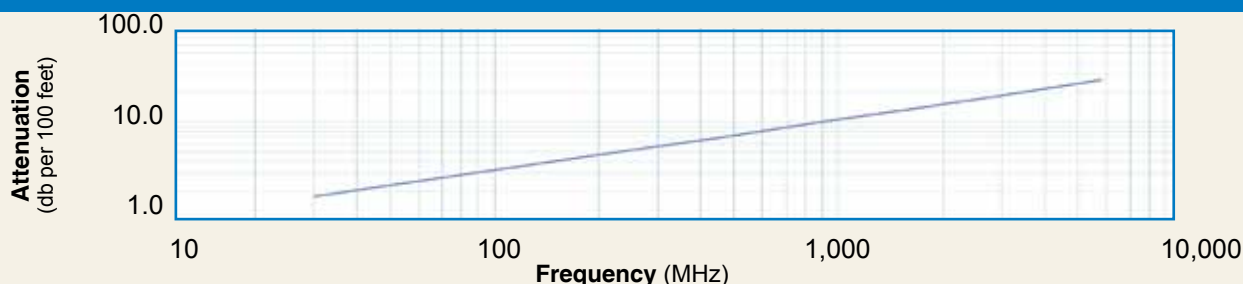

| Frequency (MHz)       | 30   | 50   | 150  | 220  | 450  | 900  | 1500 | 1800 | 2000 | 2500 | 5800 |
|-----------------------|------|------|------|------|------|------|------|------|------|------|------|
| Attenuation dB/100 ft | 2.0  | 2.5  | 4.4  | 5.4  | 7.8  | 11.1 | 14.5 | 16.0 | 16.9 | 19.0 | 29.9 |
| Attenuation dB/100 m  | 6.5  | 8.4  | 14.6 | 17.7 | 25.5 | 36.5 | 47.7 | 52.5 | 55.4 | 62.4 | 98.1 |
| Avg. Power kW         | 0.89 | 0.68 | 0.39 | 0.32 | 0.22 | 0.16 | 0.12 | 0.11 | 0.10 | 0.09 | 0.06 |

Calculate Attenuation =  $(0.356859) \cdot \sqrt{\text{FMHz}} + (0.000470) \cdot \text{FMHz}$  (interactive calculator available at [http://www.timesmicrowave.com/cable\\_calculators](http://www.timesmicrowave.com/cable_calculators))  
**Attenuation:** VSWR=1.0 ; Ambient = +25°C (77°F) **Power:** VSWR=1.0; Ambient = +40°C; Inner Conductor = 100°C (212°F);  
 Sea Level; dry air; atmospheric pressure; no solar loading



TC-195-NM



TC-195-SM



TC-195-NM-RA-D



TC-195-TM

## Connectors

| Interface | Description   | Part Number     | Stock Code | VSWR**<br>Freq. (GHz) | Coupling<br>Nut | Inner<br>Contact<br>Attach | Outer<br>Contact<br>Attach | Finish*<br>Body /Pin | Length<br>in (mm) | Width<br>in (mm) | Weight<br>lb (g) |
|-----------|---------------|-----------------|------------|-----------------------|-----------------|----------------------------|----------------------------|----------------------|-------------------|------------------|------------------|
| N male    | Straight Plug | TC-195-NM       | 3190-1555  | <1.25:1 (2.5)         | Knurl           | Solder                     | Crimp                      | S/G                  | 1.5 (38.1)        | 0.75 (19.1)      | 0.073 (33.1)     |
| N male    | Right Angle   | TC-195-NMH-RA-D | 3190-2425  | <1.35:1 (6)           | Hex/Knurl       | Solder                     | Crimp                      | A/G                  | 1.3 (32.1)        | 1.19 (30.1)      | 0.083 (37.5)     |
| SMA male  | Straight Plug | TC-195-SM       | 3190-1553  | <1.25:1 (2.5)         | Hex             | Solder                     | Crimp                      | SS/G                 | 1.0 (25.4)        | 0.32 (8.1)       | 0.015 (6.8)      |
| TNC male  | Straight Plug | TC-195-TM       | 3190-1554  | <1.25:1 (2.5)         | Knurl           | Solder                     | Crimp                      | S/G                  | 1.4 (35.6)        | 0.59 (15.0)      | 0.045 (20.4)     |

\* Finish metals: N=Nickel, S=Silver, G=Gold, SS=Stainless Steel, A=Alloy \*\*VSWR spec based on 3 foot cable with a connector pair

## Install Tools

| Type              | Part Number        | Stock Code | Description                                        |
|-------------------|--------------------|------------|----------------------------------------------------|
| Crimp Tool        | CT-240/200/195/100 | 3190-667   | Crimp tool for LMR-100,195, 200 and 240 connectors |
| Cutting Tool      | CCT-01             | 3190-1544  | Cable end flush cut tool                           |
| Deburr Tool       | DBT-U              | 3192-001   | Removes center conductor rough edges               |
| Replacement Blade | RB-01              | 3190-1609  | Replacement blade for cutting tool                 |



CT-240/200/195/100



DBT-U



CCT-01