



## SMA Male Connector Crimp/Non-Solder Contact Attachment for LMR-240, PE-C240

### RF Connectors Technical Data Sheet



**EZ-240-SM-X**

#### Times Microwave Systems Connector Specification

##### Configuration

- SMA Male Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: LMR-240, PE-C240
- 5/16 Inch Hex

##### Features

- Max. Operating Frequency 6 GHz
- Good VSWR of 1.3:1
- Gold Plated Beryllium Copper Contact
- Contact plating according to ASTM B488

##### Applications

- General Purpose Test
- Custom Cable Assemblies

##### Description

Pasternack's EZ-240-SM-X SMA male connector with crimp/non-solder contact attachment for LMR-240 and PE-C240 is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.3:1.

Our SMA male connector EZ-240-SM-X datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

##### Electrical Specifications

| Description            | Minimum | Typical | Maximum | Units |
|------------------------|---------|---------|---------|-------|
| Frequency Range        | DC      |         | 6       | GHz   |
| VSWR                   |         |         | 1.3:1   |       |
| Insertion Loss         |         |         | 0.25    | dB    |
| Operating Voltage (AC) |         |         | 1,000   | Vrms  |
| Insulation Resistance  | 10,000  |         |         | MOhms |

##### Mechanical Specifications

###### Size

|            |                    |
|------------|--------------------|
| Length     | 1.17 in [29.72 mm] |
| Width/Dia. | 0.375 in [9.53 mm] |
| Weight     | 0.02 lbs [9.07 g]  |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Crimp/Non-Solder Contact Attachment for LMR-240, PE-C240 EZ-240-SM-X](#)



## SMA Male Connector Crimp/Non-Solder Contact Attachment for LMR-240, PE-C240

### RF Connectors Technical Data Sheet



**EZ-240-SM-X**

#### Material Specifications

| Description     | Material         | Plating           |
|-----------------|------------------|-------------------|
| Contact         | Beryllium Copper | Gold<br>ASTM B488 |
| Insulation      | PTFE             |                   |
| Outer Conductor | Brass            | Tri-Metal         |
| Body            | Brass            | Tri-Metal         |
| Coupling Nut    | Brass            | Tri-Metal         |

#### Environmental Specifications

##### Temperature

Operating Range

Shock

Vibration

Thermal Shock

-40 to +125 deg C

MIL-STD-202G, Meth. 213, Cond I

MIL-STD-202G, Meth. 204, Cond B

MIL-STD-202G, Meth. 107, Cond B

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

SMA Male Connector Crimp/Non-Solder Contact Attachment for LMR-240, PE-C240 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Connector Crimp/Non-Solder Contact Attachment for LMR-240, PE-C240 EZ-240-SM-X](#)

URL: <https://www.pasternack.com/sma-male-standard-lmr-240-pe-c240-connector-ez-240-sm-x-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

| REV. | DESCRIPTION     | DATE     | APPROVED |
|------|-----------------|----------|----------|
| A    | PCR EZ-240-SM-X | 1/8/2020 | SELLIS   |

| REV. | DESCRIPTION     | DATE     | APPROVED |
|------|-----------------|----------|----------|
| A    | PCR EZ-240-SM-X | 1/8/2020 | SELLIS   |

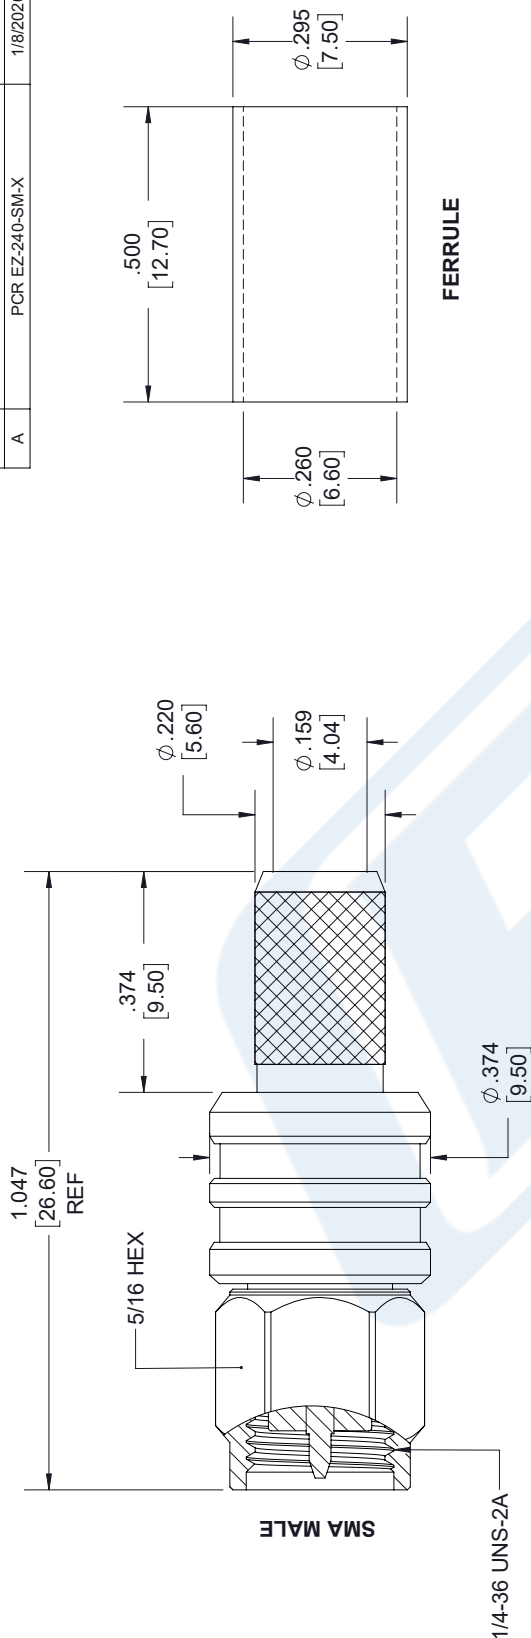

FERRULE

SHRINK TUBE

## STRIPPING DIMENSIONS

NOTES:

- CABLE ATTACHMENT:
  - OUTER: CRIMP
  - INNER: NON-SOLDER
- CRIMP SIZE REQUIRED:
  - FERRULE: .255 [6.48] HEX. CRIMP TOOL
  - CONTACT: NON-SOLDER

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE IN INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

.X = ± .2 [5.08] FRACTIONS

.XX = ± .02 [.51] ± 1/32

.XXX = ± .005 [.13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0

12 [305] < L ≤ 60 [1524] = +2 [51] / -0

60 [1524] < L ≤ 120 [3048] = +4 [102] / -0

120 [3048] < L ≤ 300 [7620] = +6 [152] / -0

300 [7620] < L = +5% / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

ITEM NO. EZ-240-SM-X

DRAWN BY K.DANG

CAGE CODE 53919

SIZE A

REV A

ITEM NO. EZ-240-SM-X

DRAWN BY K.DANG

CAGE CODE 53919

SIZE A

REV A



## 4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240

### RF Connectors Technical Data Sheet



**EZ-240-4310M-X**

#### Times Microwave Systems Connector Specification

##### Configuration

- 4.3-10 Male Connector
- 50 Ohms
- Straight Body Geometry
- LMR-240 Interface Type
- Crimp/Non-Solder Contact Attachment

##### Features

- Max. Operating Frequency 6 GHz
- Good VSWR of 1.3:1
- Gold Plated Beryllium Copper Contact

##### Applications

- General Purpose Test
- Custom Cable Assemblies
- Mobile Communications Systems
- Base Stations
- Distributed Antenna Systems (DAS)
- Small Cells
- Feeder Cables

##### Description

The Times Microwave EZ-240-4310M-X 4.3-10 male connector with crimp/non-solder attachment for LMR-240 is part of our full line of RF components available for same-day shipping. This 4.3-10 male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.3:1.

Our datasheet specifications and drawing with dimensions for Times Microwave's 4.3-10 male connector TC-240-4310M-X are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

##### Electrical Specifications

| Description           | Minimum | Typical | Maximum | Units |
|-----------------------|---------|---------|---------|-------|
| Frequency Range       | DC      |         | 6       | GHz   |
| VSWR                  |         |         | 1.3:1   |       |
| Insulation Resistance | 10,000  |         |         | MOhms |

Electrical Specification Notes:  
Insertion Loss =  $0.1 \times \text{SQRT}(\text{FGHz})$

##### Mechanical Specifications

Mating Cycles 500 Cycles

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240 EZ-240-4310M-X](#)



## 4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240

### RF Connectors Technical Data Sheet



**EZ-240-4310M-X**

#### Material Specifications

| Description  | Material         | Plating   |
|--------------|------------------|-----------|
| Contact      | Beryllium Copper | Gold      |
| Insulation   | PTFE             |           |
| Body         | Brass            | Tri-Metal |
| Coupling Nut | Brass            | Tri-Metal |
| Gasket       | Silicone         |           |
| Crimp Sleeve | Brass            | Tri-Metal |

#### Environmental Specifications

##### Temperature

Operating Range

Shock

Vibration

Thermal Shock

-40 to +125 deg C

MIL-STD 202G, Meth. 204, Cond. B

MIL-STD 202G, Meth. 213, Cond. I

MIL-STD 202G, Meth. 107, Cond. B

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240 EZ-240-4310M-X](#)




## 4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240

### RF Connectors Technical Data Sheet



**EZ-240-4310M-X**

#### Assembly Instruction

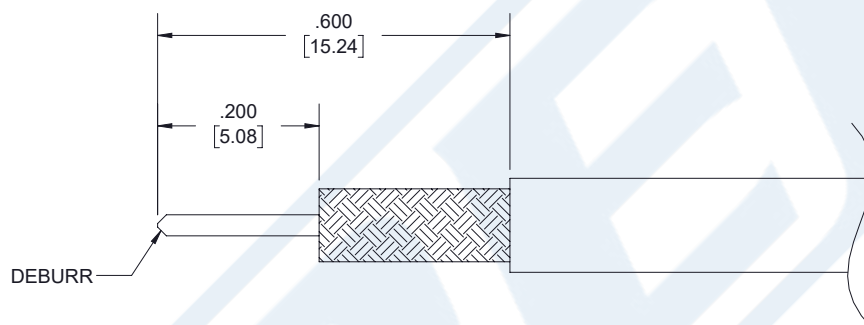

#### ASSEMBLY PROCEDURES

1. STRIP CABLE TO THE DIMENSIONS SHOWN, CHAMFER CENTER CONDUCTOR AND DEBURR CABLE.
2. SLIDE FERRULE OVER CABLE. INSTALL CABLE INTO BODY OF CONNECTOR UNTIL IT SEATS IN PLACE.
3. SLIDE FERRULE FORWARD AND AGAINST SHOULDER OF CONNECTOR AND CRIMP.

#### CRIMP SIZE REQUIRED

- FERRULE: .255" [6.48] HEX CRIMP TOOL.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240 EZ-240-4310M-X](#)



## 4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240

### RF Connectors Technical Data Sheet




**EZ-240-4310M-X**

4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.3-10 Male Connector Crimp/Non-Solder Contact Attachment for LMR-240 EZ-240-4310M-X](https://www.pasternack.com/4.3-10-male-lmr-240-connector-ez-240-4310m-x-p.aspx)

URL: <https://www.pasternack.com/4.3-10-male-lmr-240-connector-ez-240-4310m-x-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

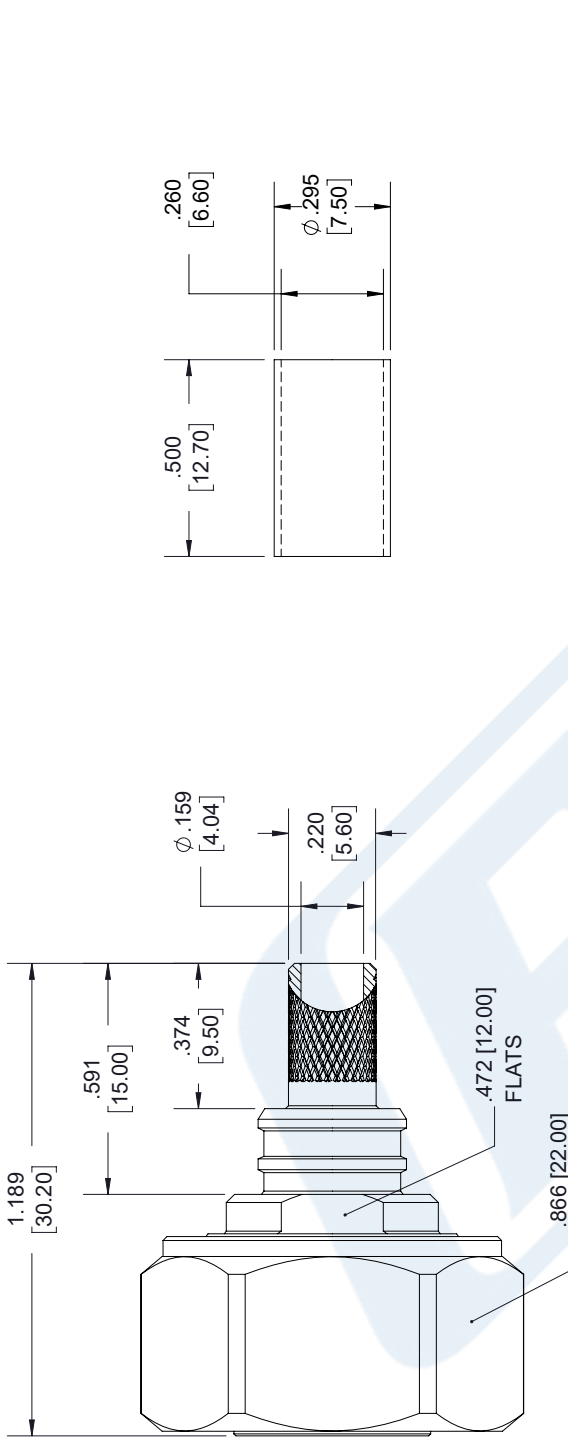

**4.3-10 MALE**

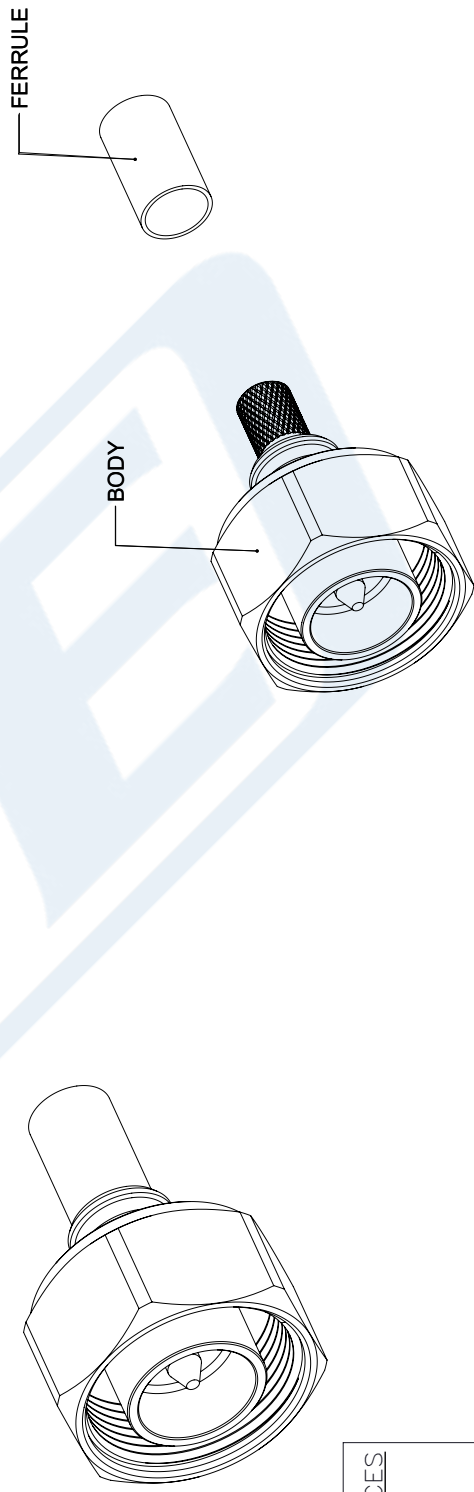

| STANDARD TOLERANCES |
|---------------------|
| .X ±0.2             |
| .XX ±0.01           |
| .XXX ±0.005         |

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

|           |                |
|-----------|----------------|
| DWG TITLE | EZ-240-4310M-X |
| CAGE CODE | 53919          |

|                                                                                                                                                                                     |          |          |       |     |      |   |      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|-------|-----|------|---|------|
| NOTES:<br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES [mm]. | CAD FILE | 04/18/18 | SCALE | N/A | SIZE | A | 7361 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|-------|-----|------|---|------|



## LMR-LW240 Light weight version of the 240 series Low Loss Coax

### RF Cables Technical Data Sheet



**LMR-LW240**

#### Times Microwave Systems Coax Cable Specification

##### Configuration

- Low Loss, Outdoor Flexible Cable
- 2 Shield(s)

##### Features

- Light Weight Coax with Aluminum Shielding
- Max Operating Frequency of 8 GHz
- Phase Velocity 83% VoP
- Max Operating Temperature +85°C
- PE Jacket
- Min Install Bend Radius of 0.75 inches

##### Applications

- Antenna Installs
- RF Test Systems
- General Purpose RF Interconnect
- Laboratory Applications

##### Description

LMR-LW240 Light weight version of the 240 series Low Loss Coax from Times Microwave is part of the large product offering by Pasternack of radio frequency coaxial cable types specifically stocked to be ready for same-day shipment. Pasternack LMR-LW240 coax cable is manufactured in a flexible design and has a 50 Ohm impedance. This low loss and light weight flexible 50 Ohm coax cable LMR-LW240 is constructed with a 0.240 inch diameter and Black PE jacket.

LMR-LW240 flexible 50 Ohm coax cable with PE jacket is rated for a 8 GHz maximum operating frequency. This 50 Ohm 0.240 inch diameter and low loss flexible coax cable is built with an aluminum double shield count and RF shielding of 90 dB. Times Microwave LMR-LW240 PE coax is constructed with Foam PE dielectric and a maximum operating temperature of 85 degrees C. Pasternack's offering of LMR-LW240 coax cable provides specs for this wire on its RF coax cable LMR-LW240 datasheet.

LMR-LW240 cable is part of more than one million RF, microwave parts in stock at Pasternack. This Times Microwave low loss and light weight LMR-LW240 coax cable is ready to buy and can be shipped worldwide. Pasternack also maintains a wide selection of other radio frequency coaxial cable types that ship same-day from our warehouse as with the rest of our other RF/microwave components.

\* LMR™ is a trademark of Times Microwave Systems.

##### Electrical Specifications

| Description                          | Minimum | Typical     | Maximum | Units        |
|--------------------------------------|---------|-------------|---------|--------------|
| Frequency Range                      | DC      |             | 8       | GHz          |
| Impedance                            |         | 50          |         | Ohms         |
| Velocity of Propagation              |         | 83          |         | %            |
| Time Delay                           |         | 1.21 [3.97] |         | ns/ft [ns/m] |
| Shielding Effectiveness              | 90      |             |         | dB           |
| Dielectric Withstanding Voltage (DC) |         |             | 1,500   | Vdc          |
| Jacket Spark                         |         |             | 5,000   | Vrms         |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LMR-LW240 Light weight version of the 240 series Low Loss Coax LMR-LW240](#)



LMR-LW240 Light weight version of the 240 series Low Loss Coax

## RF Cables Technical Data Sheet



**LMR-LW240**

|                               |             |              |
|-------------------------------|-------------|--------------|
| Inner Conductor DC Resistance | 3.2         | Ohms/1000ft  |
| Outer Conductor DC Resistance | 14.4        | Ohms/1000ft  |
| Nominal Capacitance           | 24.2 [79.4] | pF/ft [pF/m] |
| Nominal Inductance            | 0.06 [0.2]  | uH/ft [uH/m] |
| Input Power (Peak)            | 5.6         | kWatts       |

### Performance by Frequency Band

| Description           | F1    | F2   | F3    | F4    | F5    | Units    |
|-----------------------|-------|------|-------|-------|-------|----------|
| Frequency             | 0.05  | 0.15 | 0.45  | 0.9   | 1.5   | GHz      |
| Attenuation, Typ      | 1.7   | 3    | 5.3   | 7.6   | 9.9   | dB/100ft |
|                       | 5.58  | 9.84 | 17.39 | 24.93 | 32.48 | dB/100m  |
| Input Power (CW), Max | 1,150 | 660  | 380   | 260   | 200   | Watts    |

| Description           | F6    | F7    | F8    | F9    | F10   | Units    |
|-----------------------|-------|-------|-------|-------|-------|----------|
| Frequency             | 1.8   | 2     | 2.5   | 5.8   | 8     | GHz      |
| Attenuation, Typ      | 10.9  | 11.5  | 12.9  | 20.4  | 24.3  | dB/100ft |
|                       | 35.76 | 37.73 | 42.32 | 66.93 | 79.72 | dB/100m  |
| Input Power (CW), Max | 180   | 170   | 150   | 100   | 80    | Watts    |

### Mechanical Specifications

|                                 |                          |
|---------------------------------|--------------------------|
| Diameter                        | 0.24 in [6.1 mm]         |
| Weight                          | 0.026 lbs/ft [0.04 kg/m] |
| Min. Bend Radius (Installation) | 0.75 in [19.05 mm]       |
| Min. Bend Radius (Repeated)     | 2.5 in [63.5 mm]         |
| Bending Moment                  | 0.25 lbs-ft [0.34 N-m]   |
| Tensile Strength                | 80 lbs [36.29 kg]        |
| Flat Plate Crush                | 20 lbs/in [0.36 kg/mm]   |

### Construction Specifications

| Description     | Material and Plating | Diameter           |
|-----------------|----------------------|--------------------|
| Inner Conductor | Copper, 1 Strand     | 0.056 in [1.42 mm] |
| Conductor Type  | Solid                |                    |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LMR-LW240 Light weight version of the 240 series Low Loss Coax LMR-LW240](#)



## LMR-LW240 Light weight version of the 240 series Low Loss Coax

### RF Cables Technical Data Sheet



**LMR-LW240**

|               |               |                   |
|---------------|---------------|-------------------|
| Dielectric    | Foam PE       | 0.15 in [3.81 mm] |
| First Shield  | Aluminum Tape | [ ]               |
| Second Shield | Aluminium     | [ ]               |
| Jacket        | PE, Black     | 0.24 in [6.1 mm]  |

#### Environmental Specifications

##### Temperature

|                    |                  |
|--------------------|------------------|
| Operating Range    | -40 to +85 deg C |
| Installation Range | -40 to +85 deg C |
| Storage Range      | -70 to +85 deg C |

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:


LMR-LW240 Light weight version of the 240 series Low Loss Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [LMR-LW240 Light weight version of the 240 series Low Loss Coax LMR-LW240](#)

URL: <https://www.pasternack.com/low-loss-flexible-lmr-lw240-pe-jacket-aluminum-tape-over-aluminium-outer-conductor-double-shielded-lmr-lw240-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

| REVISIONS |                 |            |          |
|-----------|-----------------|------------|----------|
| REV.      | DESCRIPTION     | DATE       | APPROVED |
| A         | INITIAL RELEASE | 06-04-2021 | SELLIS   |

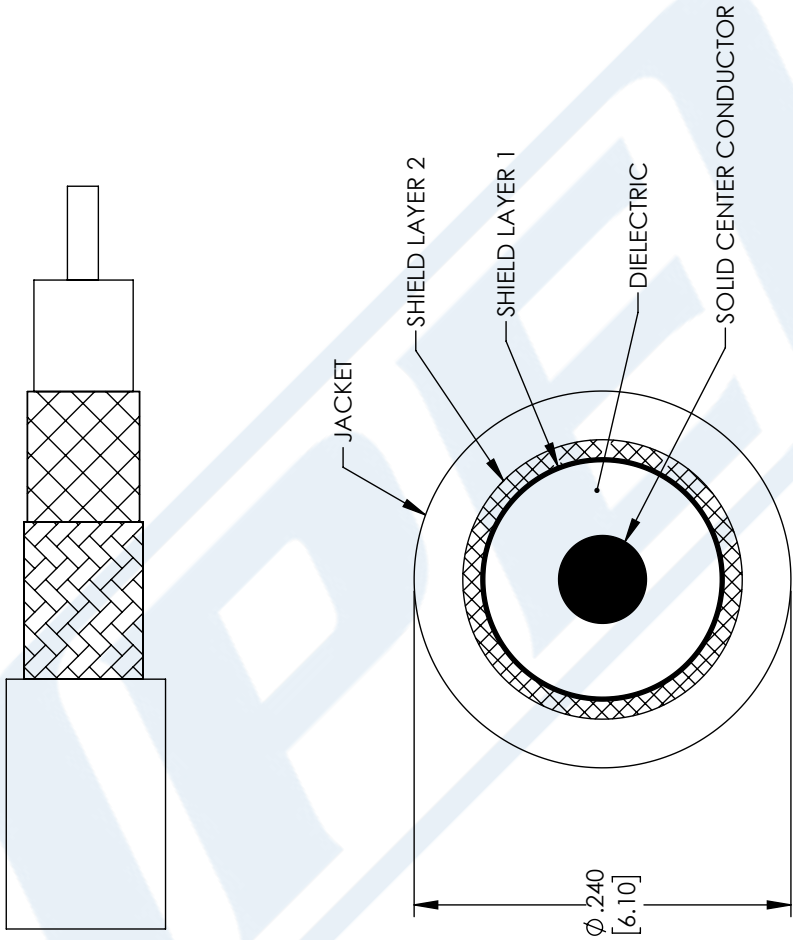

|                                                                                                  |           |
|--------------------------------------------------------------------------------------------------|-----------|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |           |
| TOLERANCES:                                                                                      | FRACTIONS |
| .X = ±.2                                                                                         | [.08]     |
| .XX = ±.02                                                                                       | [.51]     |
| .XXX = ±.005                                                                                     | [.13]     |
| ANGLES ± 1°                                                                                      |           |
| CABLE LENGTH (L) TOLERANCES:                                                                     |           |
| L ≤ 12 [305] = +1 [25] / -0                                                                      |           |
| 12 [305] < L ≤ 60 [1524] = +2 [51] / -0                                                          |           |
| 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0                                                       |           |
| 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0                                                      |           |
| 300 [7620] < L = +5% / -0                                                                        |           |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.                                                  |           |

|                                                                                                                                                                                                   |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>PE PASTERNAK</b><br>an INFINITI® brand                                                                                                                                                         |            |
| Pasternack Enterprises, Inc.<br>P.O. Box 16759, Irvine, CA 92623.<br>Phone: 1.949.261.1920   1.866.727.8376<br>Fax: 1.949.261.7451<br>Website: www.pasternack.com<br>E-mail: sales@pasternack.com |            |
| SIZE                                                                                                                                                                                              | ITEM NO.   |
| A                                                                                                                                                                                                 | 53919      |
| DRAWN BY                                                                                                                                                                                          | MVEERAPPAN |
| LMR-LW240                                                                                                                                                                                         |            |

|                                                                                                                       |        |
|-----------------------------------------------------------------------------------------------------------------------|--------|
| THIRD-ANGLE PROJECTION                                                                                                |        |
| THE INFORMATION AND<br>DESIGN IN THIS DOCUMENT<br>IS THE PROPERTY OF<br>PASTERNAK CORPORATION<br>ALL RIGHTS RESERVED. |        |
| SHEET                                                                                                                 | 1 OF 1 |
| SCALE                                                                                                                 | N/A    |
| REV                                                                                                                   | A      |