



BNC Male to Black FAKRA Plug Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C7715

Configuration

- Connector 1: BNC Male
- Connector 2: FAKRA Plug
- Cable Type: RG174

Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C7715 BNC male to black FAKRA plug cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to FAKRA cable assembly has a male to plug gender configuration with 50 ohm flexible RG174 coax. The PE3C7715 BNC male to FAKRA plug cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

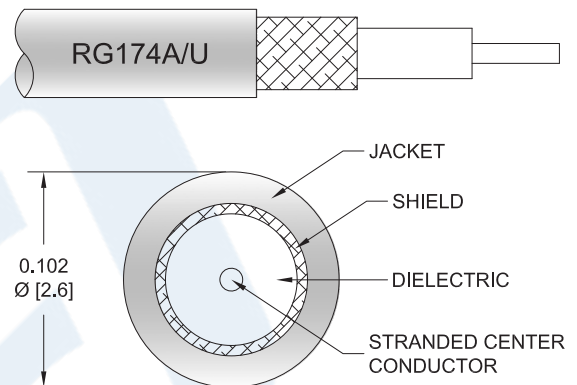

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Black FAKRA Plug Cable Using RG174 Coax PE3C7715](#)



BNC Male to Black FAKRA Plug Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C7715

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.08 [101.97]		pF/ft [pF/m]
Operating Voltage (DC)			335	Vdc
Dielectric Withstanding Voltage (AC)			800	Vrms
Input Power (Average)			17	Watts

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.04	0.08	0.13	0.21	0.32	dB/ft
	0.13	0.26	0.43	0.69	1.05	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. The Insertion Loss includes an estimated insertion loss of 0.1dB per connector loss.

Mechanical Specifications

Cable Assembly

Diameter 0.57 in [14.48 mm]

Cable

Cable Type RG174
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel
 Dielectric Type PE
 Number of Shields 1
 Shield Layer 1 Tinned Copper Braid
 Jacket Material PVC, Black
 Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Black FAKRA Plug Cable Using RG174 Coax PE3C7715](#)



BNC Male to Black FAKRA Plug Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C7715

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	FAKRA Plug
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Brass, Gold	Phosphor Bronze, Gold
Contact Plating Specification	50 µin minimum	
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Brass, Nickel
Body Material and Plating	Brass, Nickel	Plastic
Body Plating Specification	100 µin minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 µin minimum	

Environmental Specifications

Temperature

Operating Range

-40 to +80 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Black FAKRA Plug Cable Using RG174 Coax PE3C7715](#)



BNC Male to Black FAKRA Plug Cable Using RG174 Coax

RF Cable Assemblies Technical Data Sheet

PE3C7715

How to Order

Part Number Configuration:

PE3C7715

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C7715-12 = 12 inches long cable
PE3C7715-100cm = 100 cm long cable

BNC Male to Black FAKRA Plug Cable Using RG174 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to Black FAKRA Plug Cable Using RG174 Coax PE3C7715](#)

URL: <https://www.pasternack.com/bnc-male-fakra-plug-rg174au-cable-assembly-pe3c7715-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C7715 CAD Drawing
BNC Male to Black FAKRA Plug Cable Using RG174 Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/14/2021	SELLIS

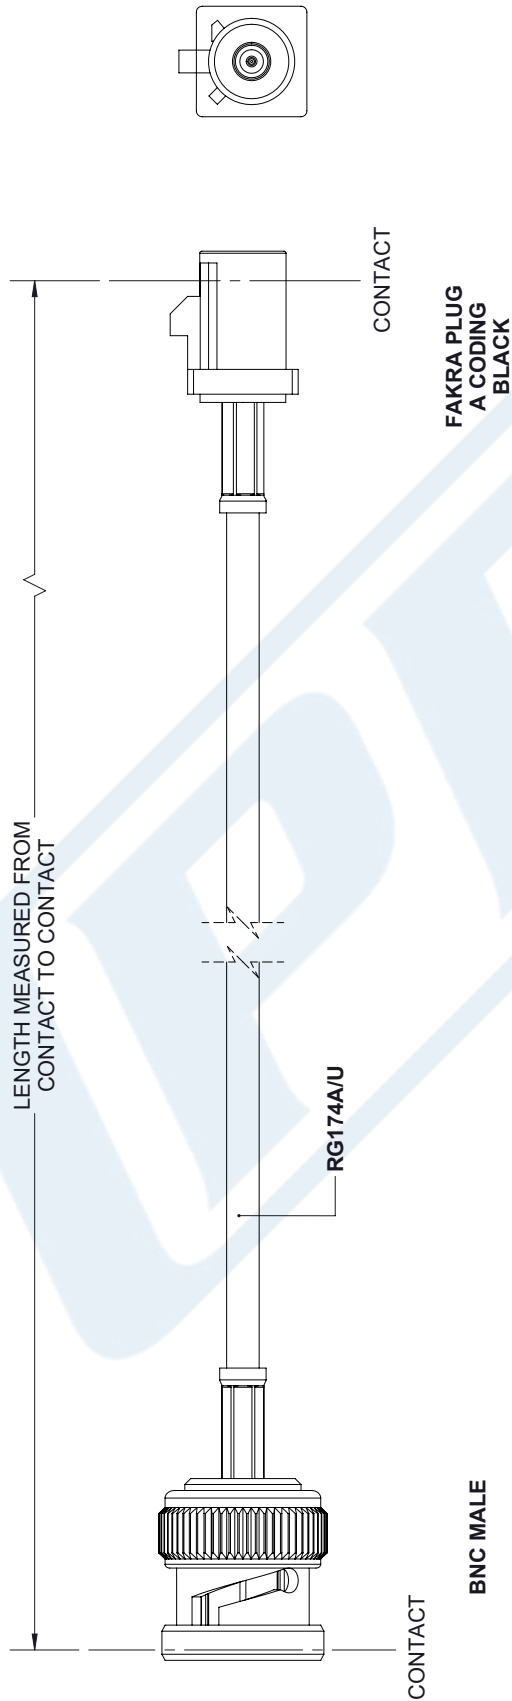

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[.08]	FRACTIONS	± 1/32
.XX = ± .02	[.51]	ANGLES	± 1°
.XXX = ± .005	[.13]	CABLE LENGTH (L) TOLERANCES:	

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L =	+5% L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

**PASTERNAK**
an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	K.DANG	PE45404A

THIRD-ANGLE PROJECTION



THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET	1	OF	1
SCALE	N/A		
REV	A		