

## MCX Plug Right Angle to MCX Plug Right Angle using RG316 Coax Cable




### PE3C9841

#### Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: MCX Plug Right Angle
- Cable Type: RG316

#### Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- VSWR of 1.4:1

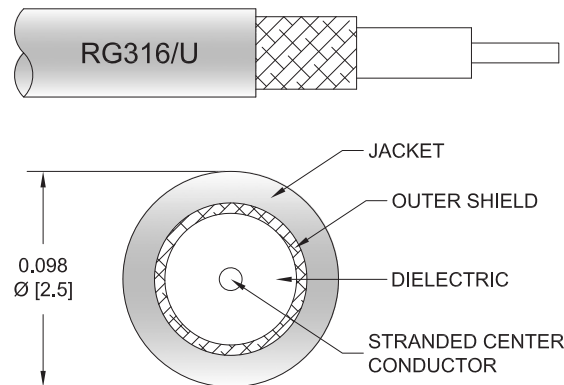

#### Applications

- General Purpose
- Laboratory Use
- Military
- Aerospace
- Wireless Communications
- General Purpose Test

#### Description

Pasternack's PE3C9841 MCX plug right angle to MCX plug right angle cable using RG316 is part of our full line of RF components available for same-day shipping. This Pasternack MCX to MCX cable assembly has a plug to plug gender configuration with 50 ohm RG316. The PE3C9841 MCX plug to MCX plug cable assembly operates to 3 GHz. The right angle MCX interfaces on the RG316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.11	0.16	0.238	0.38	0.58	dB/ft
	0.36	0.52	0.78	1.25	1.9	dB/m

## MCX Plug Right Angle to MCX Plug Right Angle using RG316 Coax Cable



### PE3C9841

#### Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2 dB per connector

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.121 lbs [54.88 g]

##### Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE

#### Connectors

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	MCX Plug Right Angle
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Right Angle
Contact Material and Plating	Bronze, Gold over Copper	Bronze, Gold over Copper
Body Material and Plating	Bronze, Copper-Tin-Zinc Alloy	Bronze, Copper-Tin-Zinc Alloy

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Values at 25°C, sea level.

MCX Plug Right Angle to MCX Plug  
Right Angle using RG316 Coax Cable



**PE3C9841**

**Typical Performance Data**

**How to Order**

Part Number Configuration:

**PE3C9841**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C9841-12 = 12 inches long cable  
PE3C9841-100cm = 100 cm long cable

MCX Plug Right Angle to MCX Plug Right Angle using RG316 Coax Cable from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to MCX Plug Right Angle using RG316 Coax Cable PE3C9841](#)

URL: <https://www.pasternack.com/mcx-plug-right-angle-to-mcx-plug-non-magnetic-cable-using-rg316-pe3c9841-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C9841 CAD Drawing

MCX Plug Right Angle to MCX Plug Right Angle using RG316 Coax Cable

