

SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215



**RF Connectors** Technical Data Sheet

PE4332

## Configuration

- SMA Male Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry

#### **Features**

- Max. Operating Frequency 11 GHz
- Gold Plated Brass Contact

- •RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215 Interface Type
- Clamp/Solder Attachment
- 5/16 inch Hex

• 30 µin minimum contact plating

## **Applications**

General Purpose Test

Custom Cable Assemblies

#### Description

Pasternack's PE4332 SMA male connector with clamp/solder attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216 and RG215 is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 11 GHz.

Our SMA male connector PE4332 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

### **Electrical Specifications**

11 GH	z
500 Vrm	ıS
,	

## **Mechanical Specifications**

Size

Length 1.515 in [38.48 mm] Width/Dia. 0.748 in [19.00 mm] Weight 0.082 lbs [37.19 g]

Mating Torque 3 to 5 in-lbs [0.34 to 0.57 Nm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215 PE4332

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451



SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215



RF Connectors Technical Data Sheet

PE4332

#### **Material Specifications**

Description	Material	Plating
Contact	Brass	Gold 30 µin minimum
Insulation	PTFE	
Body	Brass	Nickel 100 µin minimum
Coupling Nut	Brass	Nickel 100 µin minimum

**Environmental Specifications** 

**Temperature** 

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

**Plotted and Other Data** 

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215 PE4332

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451



SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215




RF Connectors
Technical Data Sheet


PE4332

#### **Assembly Instruction**

1. SLIDE CLAMP NUT (1), WASHER (2) & GASKET (3) OVER CABLE. STRIP CABLE AS SHOWN. DO NOT NICK BRAID WHILE CUTTING JACKET. TAPER END OF BRAID TO PERMIT ASSEMBLY OF BRAID CLAMP (4). SLIDE BRAID CLAMP (4) OVER BRAID & SEAT AGAINST CABLE.



2. FORM BRAID OVER CLAMP NUT (4). TRIM BRAID BACK TO SHOULDER. CUT DIELECTRIC & CENTER CONDUCTOR TO DIMENSION SHOWN. DO NOT NICK CENTER CONDUCTOR. SOLDER CONTACT TO CENTER CONDUCTOR. REMOVE EXCESS SOLDER. DO NOT OVER HEAT DIELECTRIC. INSERT CABLE ASSEMBLY INTO BODY & TIGHTEN.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215 PE4332

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451



SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215



RF Connectors
Technical Data Sheet

PE4332

SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Connector Clamp/Solder Attachment for RG213, RG214, RG8, RG9, RG11, RG225, RG393, RG144, RG216, RG215 PE4332


URL: https://www.pasternack.com/sma-male-standard-rg213-rg214-rg8-rg9-rg11-rg225-rg393-connector-pe4332-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

## PE4332 CAD Drawing

SMA Male Connector Clamp/Solder Attachment for RG213, RG214,

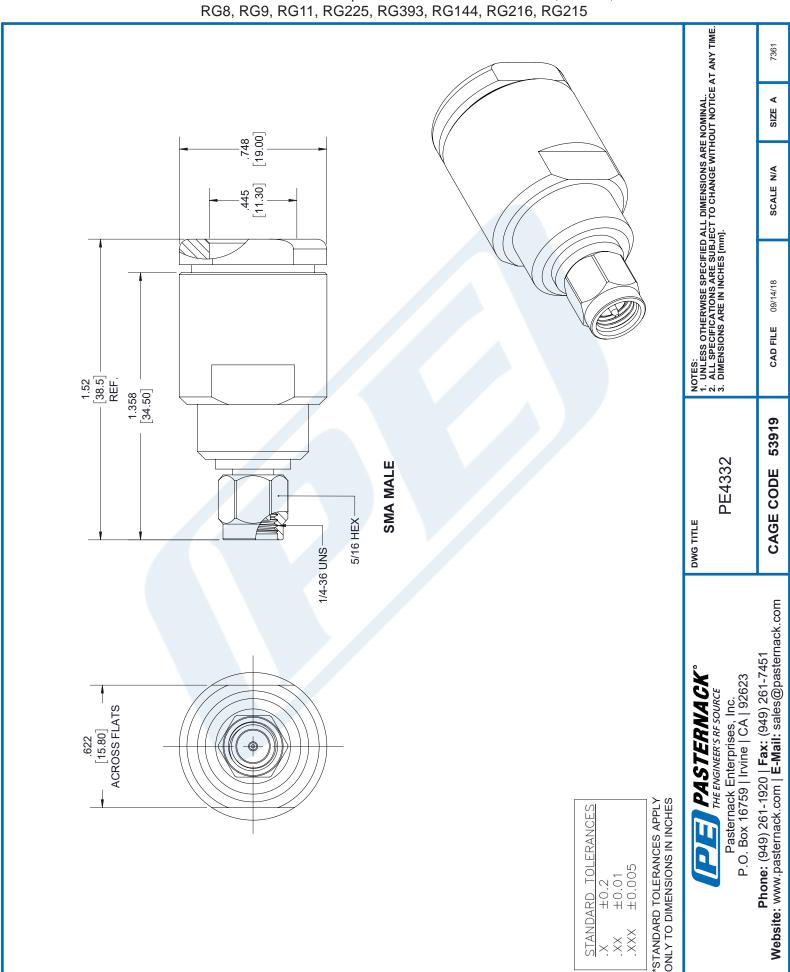





# QN Female Bulkhead Connector Crimp/Solder Attachment For RG213, RG215, .500 inch Diameter

## TECHNICAL DATA SHEET

PE44607

#### QN Female Bulkhead Connector Crimp/Solder Attachment For RG213, RG215, .500 inch Diameter

Configuratio	n
--------------	---

Connector QN Female
Connector Interface Type RG213,RG215
Cable Attachment Method (Shield/Contact) Crimp/Solder
Body Style Straight
Mount Method Bulkhead

#### **Electrical Specifications**

Frequency Range, GHz

Impedance, Ohms

Maximum Return Loss, dB

Maximum Operating Voltage, Volts

Dielectric Withstanding Voltage, Vrms

Dielectric Withstanding Voltage, Vrms

Dielectric Withstanding Voltage, Vrms

Dielectric Virms

Dielectric Virms

Dielectric Virms

Dielectric Virms

#### Frequency 1

Frequency, MHz DC to 1,000
Return Loss, dB 33
Insertion Loss, dB 0.05

#### Frequency 2

Frequency, GHz 1 to 2.5
Return Loss, dB 31
Insertion Loss, dB 0.08

## Frequency 3

Frequency, GHz 2.5 to 6
Return Loss, dB 22
Insertion Loss, dB 0.12

### **Mechanical Specifications**

Temperature

Operating Range, deg C -40 to +125

Size

 Length, in [mm]
 1.68 [42.67]

 Width/Dia., in [mm]
 0.67 [17.02]

 Weight, lbs [g]
 0.096 [43.54]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: QN Female Bulkhead Connector Crimp/Solder Attachment For RG213, RG215, .500 inch Diameter PE44607

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623

Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





# QN Female Bulkhead Connector Crimp/Solder Attachment For RG213, RG215, .500 inch Diameter

## TECHNICAL DATA SHEET

PE44607

Connector

Type QN Female
Mating Cycles 100
Contact Material and Plating Spring Bronze, Gold
Contact Plating Specification 6μ in. minimum
Body Material and Plating Brass, Tri-Metal
Dielectric Type PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

**Plotted and Other Data** 

Notes: Values at 25 °C, sea level

QN Female Bulkhead Connector Crimp/Solder Attachment For RG213, RG215, .500 inch Diameter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: QN Female Bulkhead Connector Crimp/Solder Attachment For RG213, RG215, .500 inch Diameter PE44607

URL: http://www.pasternack.com/qn-female-standard-rg213-rg215-connector-pe44607-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

## PE44607 CAD Drawing

QN Female Bulkhead Connector Crimp/Solder Attachment For RG213, RG215, .500 inch Diameter

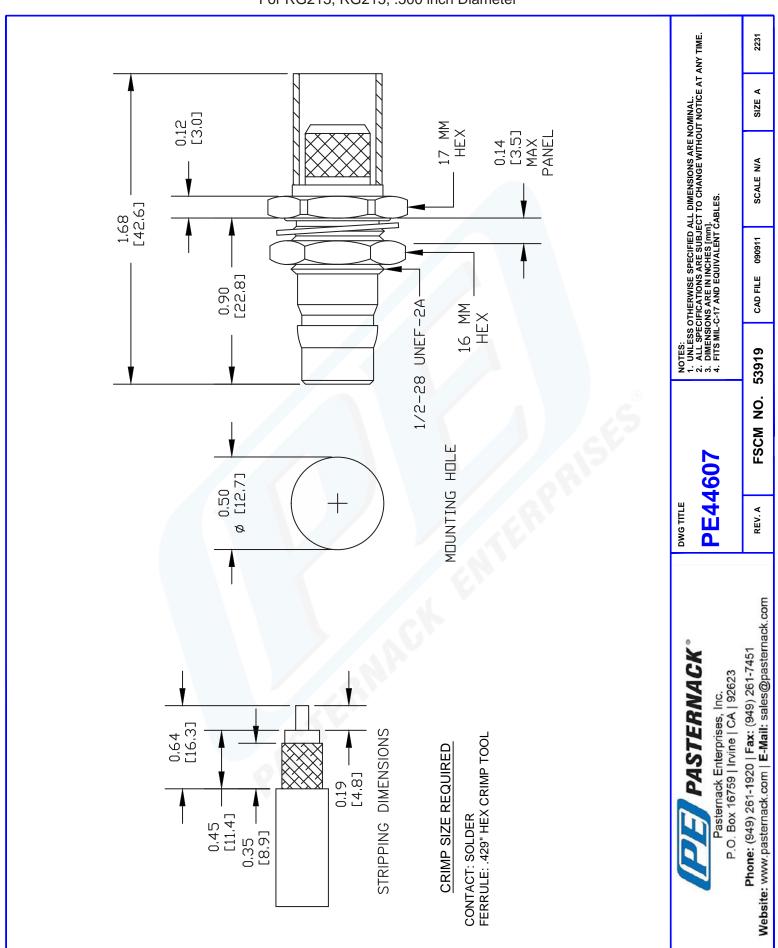





## Flexible RG213 Coax Cable Single Shielded with Black PVC Jacket

## TECHNICAL DATA SHEET

RG213/U

Configuration

Inner Conductor Material and Plating Copper
Dielectric Type PE

Shield Materials Copper Braid Jacket Material and Color PVC, Black

**Electrical Specifications** 

Impedance, Ohms 50
Velocity of Propagation, % 66
Maximum Operating Frequency, MHz 1000

Capacitance, pF/ft [pF/m] 30.8 [101.05]

**Electrical Specifications by Frequency** 

Frequency 1

Frequency, MHz 100 Attenuation, dB/100ft [dB/100m] 2.1 [6.89]

Frequency 2

Frequency, MHz 400 Attenuation, dB/100ft [dB/100m] 4.8 [15.75]

Frequency 3

Frequency, MHz 1000 Attenuation, dB/100ft [dB/100m] 8 [26.25]

**Mechanical Specifications** 

**Inner Conductor** 

Number of Strands 7
Material Copper
Diameter, in [mm] 0.09 [2.29]

Dielectric:

Type PE

Diameter, in [mm] 0.285 [7.24]

Shield:

Number of 1

Material 1 Copper Braid
Diameter, in [mm] 0.314 [7.98]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Flexible RG213 Coax Cable Single Shielded with Black PVC Jacket RG213/U

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451





## Flexible RG213 Coax Cable Single Shielded with Black PVC Jacket

## TECHNICAL DATA SHEET

RG213/U

Jacket:

Material PVC

 Diameter, in [mm]
 0.405 [10.29]

 Color
 Black

 Weight, lbs/ft [Kg/m]
 0.115 [0.17]

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant 06/18/2012

#### **Plotted and Other Data**

Notes:

- Values at +25 °C, sea level
- Max. Operating Voltage(VRMS): 5000

Flexible RG213 Coax Cable Single Shielded with Black PVC Jacket from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Flexible RG213 Coax Cable Single Shielded with Black PVC Jacket RG213/U

URL: http://www.pasternack.com/flexible-0.405-rg213-50-ohm-coax-cable-pvc-jacket-rg213-u-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

RG213/U CAD Drawing
Flexible RG213 Coax Cable Single Shielded with Black PVC Jacket

