



Reverse Polarity SMA Male to BNC Male Cable
Using RG174 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3332LF

Configuration

- Connector 1: SMA Male Reverse Polarity
- Connector 2: BNC Male
- Cable Type: RG174

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|---------------|---------|--------------|
| Frequency Range | DC | | 1,000 | MHz |
| VSWR | | | 1.5:1 | |
| Velocity of Propagation | | 66 | | % |
| Capacitance | | 31.1 [102.03] | | pF/ft [pF/m] |

dB/m
dB/m

Mechanical Specifications

Cable Assembly

Diameter 0.57 in [14.48 mm]

Cable

Cable Type RG174
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PE (LD)
 Number of Shields 1
 Shield Layer 1 Tinned Copper Braid
 Jacket Material PVC, Black
 Jacket Diameter 0.11 in [2.79 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to BNC Male Cable Using RG174 Coax, LF Solder, RoHS PE3C3332LF](#)



Reverse Polarity SMA Male to BNC Male Cable Using RG174 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3332LF

Connectors

| Description | Connector 1 | Connector 2 |
|------------------------------------|---------------------------|------------------|
| Type | SMA Male Reverse Polarity | BNC Male |
| Specification | MIL-STD-348 | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Gold | Brass, Gold |
| Contact Plating Specification | MIL-G-45204 | 50µ in. minimum |
| Dielectric Type | PTFE | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | QQ-N-290 | 100µ in. minimum |
| Coupling Nut Material and Plating | Brass, Nickel | Brass, Nickel |
| Coupling Nut Plating Specification | QQ-N-290 | 100µ in. minimum |
| Hex Size | 5/16 inch | |
| Torque | 3 in-lbs [0.34 Nm] | |

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to BNC Male Cable Using RG174 Coax, LF Solder, RoHS PE3C3332LF](#)



Reverse Polarity SMA Male to BNC Male Cable Using RG174 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3332LF

How to Order

Part Number Configuration:

PE3C3332LF - **xx** **uu**

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C3332LF-12 = 12 inches long cable
PE3C3332LF-100cm = 100 cm long cable

Reverse Polarity SMA Male to BNC Male Cable Using RG174 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity SMA Male to BNC Male Cable Using RG174 Coax, LF Solder, RoHS PE3C3332LF](https://www.pasternack.com/sma-male-bnc-male-rg174au-cable-assembly-pe3c3332lf-p.aspx)

URL: <https://www.pasternack.com/sma-male-bnc-male-rg174au-cable-assembly-pe3c3332lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3332LF CAD Drawing

Reverse Polarity SMA Male to BNC Male Cable Using RG174 Coax, LF Solder, RoHS

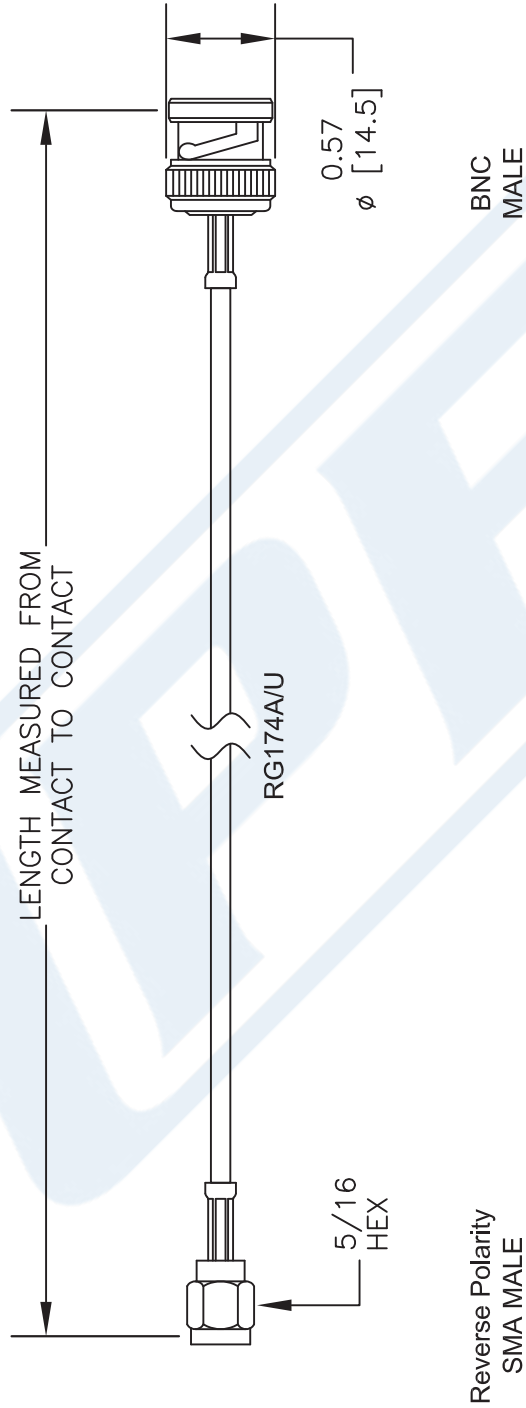

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES (mm).
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE
PE3C3332LF

FSCM NO. 53919

CAD FILE 102416 SCALE N/A SIZE A 2233

(PE) PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com