



Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts

Couplers Technical Data Sheet

PE2207-6

Features

- Directional Coupler
- 12.4 to 18 GHz Frequency Range
- Coupling 6 ± 1 dB
- Directivity > 15 dB
- VSWR < 1.4:1
- Max Power 50 Watts (CW)

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Description

Directional couplers are indispensable components for isolating, separating and combining signals. For example, they provide a simple way of sampling microwave signals. They also can make accurate attenuator measurements since reflections are eliminated. The PE2207-6 is a 6 dB directional coupler that operates from 12.4 to 18 GHz and can handle up to 50 Watts (CW) with 15 dB directivity minimum and 1.4:1 VSWR maximum. The package interface uses SMA female connectors, and is also REACH and RoHS compliant.

The PE2207-6 is part of Pasternack's family of directional/dual-directional couplers that offer coupling ratios up to 50 dB with excellent performance featuring high directivity, low insertion loss and VSWR. They are available in both narrow and broad bandwidths and can be used in a wide variety of applications including signal sampling, VSWR measurements, power combining and distribution.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	12.4		18	GHz
Impedance		50		Ohms
Coupling		6 ± 1		dB
Frequency Sensitivity			± 0.5	dB
Main Line Loss		2.2		dB
Insertion Loss			0.6	dB
Directivity	15			dB
Main Line VSWR			1.3:1	
Secondary Line VSWR			1.4:1	
Input Power (CW)			4	Watts
Input Power (Peak)			1	KWatts

Electrical Specification Notes:

Values at 25°C, sea level.

Main line loss is the difference in power level between input and output.

Insertion loss excludes coupled power from main line loss.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts PE2207-6](#)



Directional 6 dB SMA Coupler From 12.4 GHz
to 18 GHz Rated to 4 Watts

Couplers Technical Data Sheet

PE2207-6

Mechanical Specifications

Size

Length	1 in [25.4 mm]
Width/Dia.	0.4 in [10.16 mm]
Height	1 in [25.4 mm]
Weight	0.041 lbs [18.6 g]

Configuration

Package Type	Connectorized
Input Connector	SMA Female
Output Connector	SMA Female
Coupled Connectors	SMA Female

Environmental Specifications

Temperature

Operating Range	-55 to +100 deg C
Storage Range	-55 to +100 deg C

Humidity	MIL-STD-202 Method 106
Shock	MIL-STD-202 Method 213/I
Vibration	MIL-STD-202 Method 204/D
Altitude	MIL-STD-202 Method 105/E
Thermal Shock	MIL-STD-202 Method 107/B

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts PE2207-6](#)




Directional 6 dB SMA Coupler From 12.4 GHz
to 18 GHz Rated to 4 Watts

Couplers Technical Data Sheet

PE2207-6

Typical Performance Data

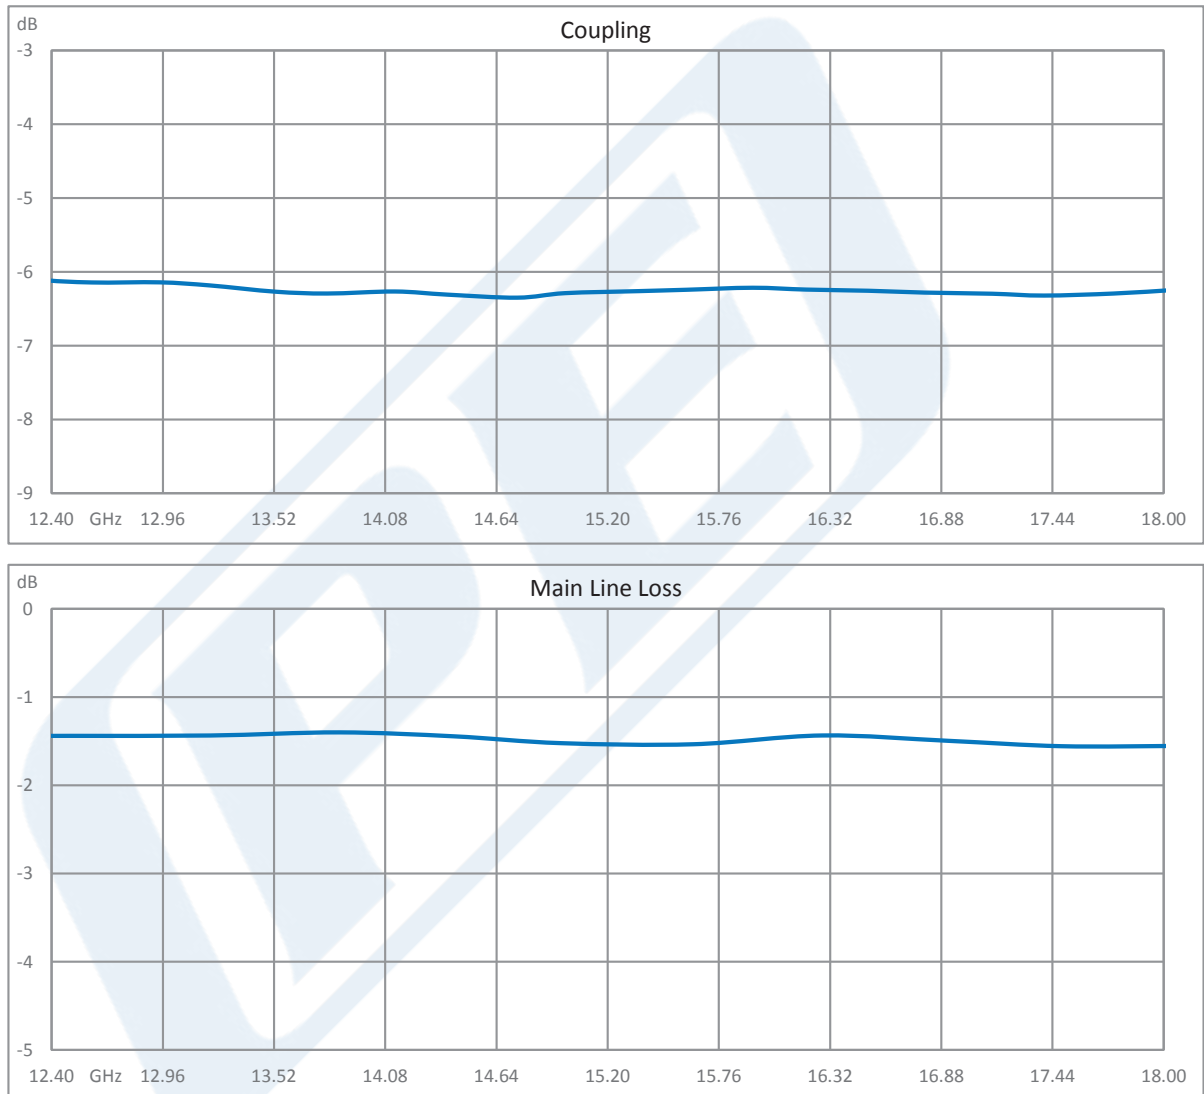


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts PE2207-6](#)



Directional 6 dB SMA Coupler From 12.4 GHz
to 18 GHz Rated to 4 Watts

Couplers Technical Data Sheet

PE2207-6

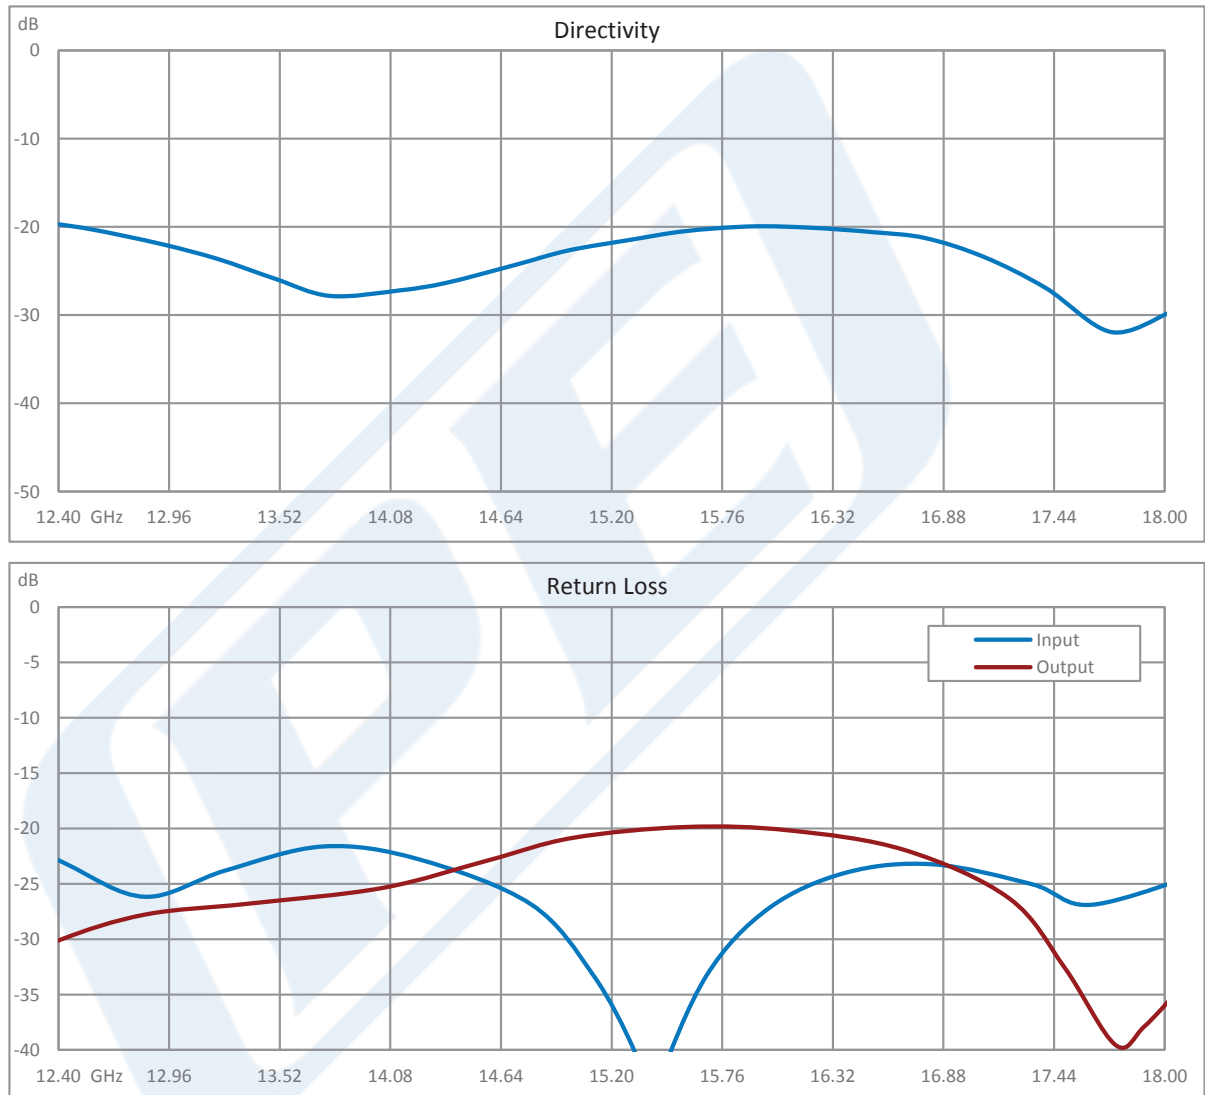

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts PE2207-6](#)



Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts

Couplers Technical Data Sheet

PE2207-6

Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts PE2207-6](https://www.pasternack.com/directional-6-db-sma-coupler-12.4-18-ghz-50-watts-pe2207-6-p.aspx)

URL: <https://www.pasternack.com/directional-6-db-sma-coupler-12.4-18-ghz-50-watts-pe2207-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE2207-6 CAD Drawing

Directional 6 dB SMA Coupler From 12.4 GHz to 18 GHz Rated to 4 Watts

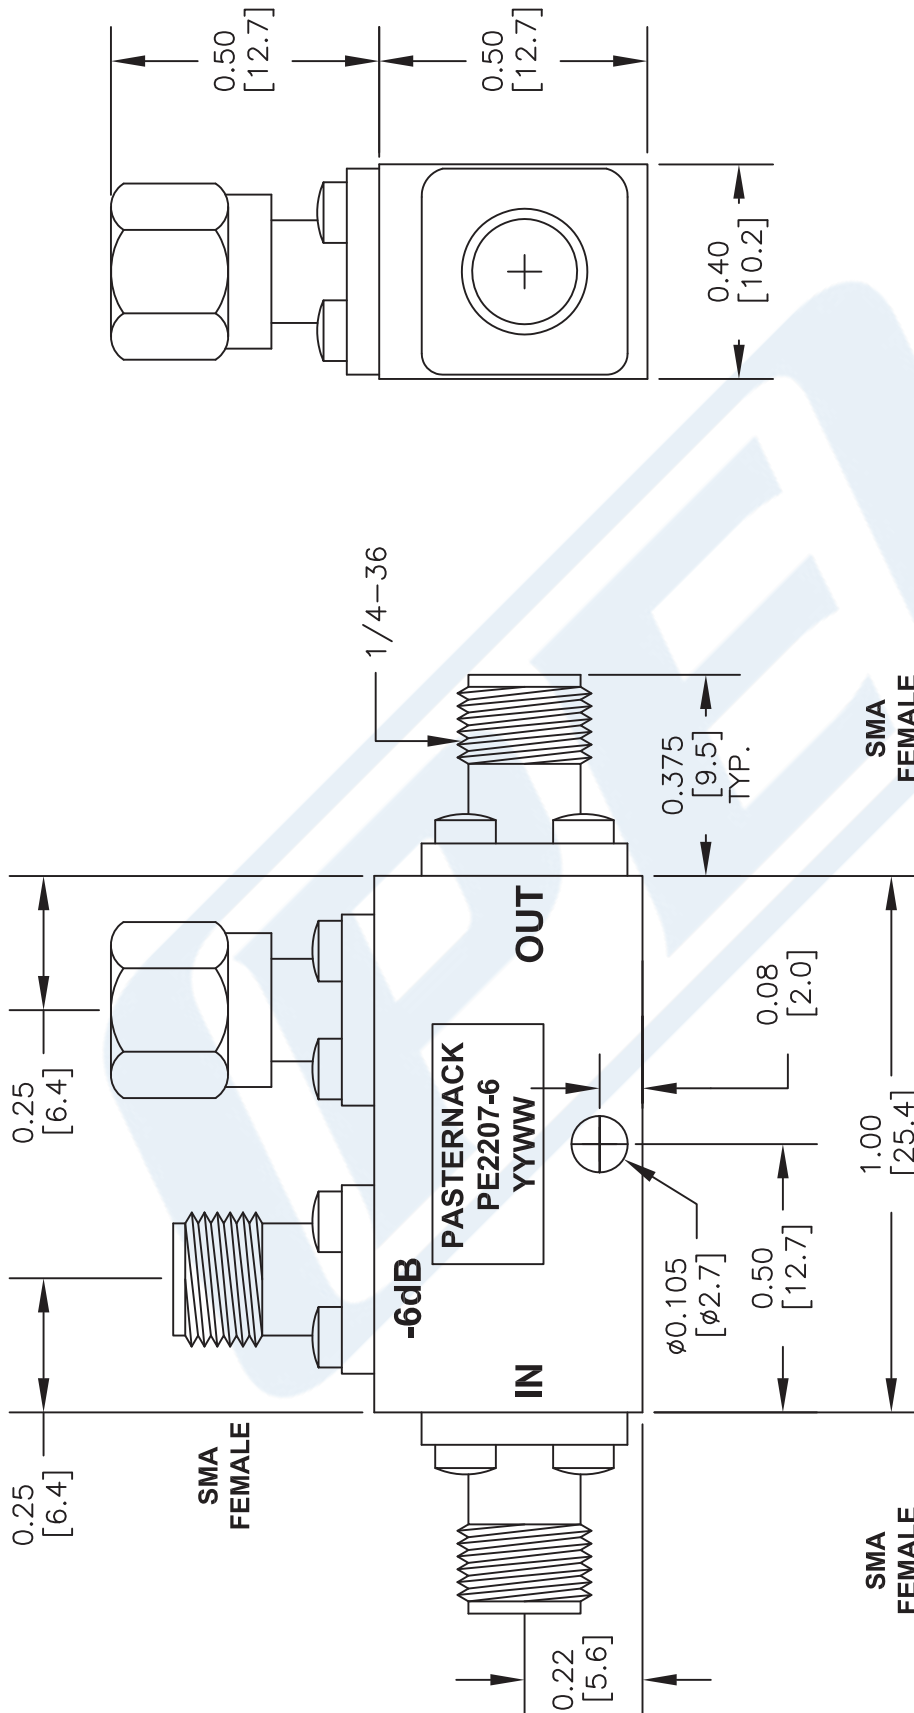

STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE2207-6

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 033016

SCALE N/A

SIZE A

3045