

SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax



RF Cable Assemblies Technical Data Sheet


PE34313

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female Bulkhead
- Cable Type: PE-SR405FL

Features

- Max Frequency 8 GHz
- 69.5% Phase Velocity

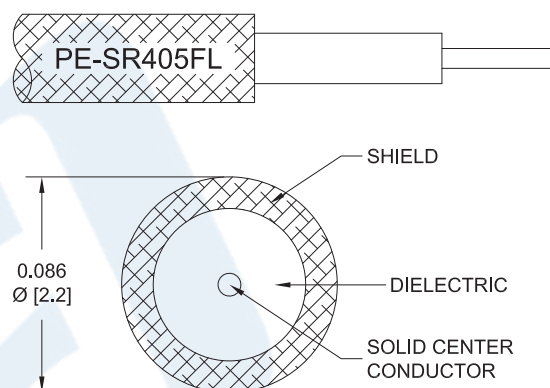

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE34313 SMA male right angle to SMA female bulkhead cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm formable PE-SR405FL coax. The PE34313 SMA male to SMA female cable assembly operates to 8 GHz. The right angle SMA interface on the PE-SR405FL cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax PE34313](#)

SMA Male Right Angle to SMA Female Bulkhead
Cable Using PE-SR405FL Coax



RF Cable Assemblies Technical Data Sheet

PE34313

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	8	GHz
Insertion Loss (Typ.)	0.15	0.225	0.306	0.468	0.707	dB/ft
	0.49	0.74	1	1.54	2.32	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Weight 0.034 lbs [15.42 g]

Cable

Cable Type PE-SR405FL
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax PE34313](#)

SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax



RF Cable Assemblies Technical Data Sheet

PE34313

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Female Bulkhead
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	50μ in. minimum	50μ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Stainless Steel, Gold	Stainless Steel, Gold
Body Plating Specification	30μ in. minimum	30μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100μ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax PE34313](#)

SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax



RF Cable Assemblies Technical Data Sheet

PE34313

How to Order

Part Number Configuration:

PE34313

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34313-12 = 12 inches long cable
PE34313-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax PE34313](#)


URL: <https://www.pasternack.com/sma-male-sma-female-pe-sr405fl-cable-assembly-pe34313-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34313 CAD Drawing

SMA Male Right Angle to SMA Female Bulkhead Cable Using PE-SR405FL Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	PCR PE34313 20210907	11/15/2021	SRAUTUS

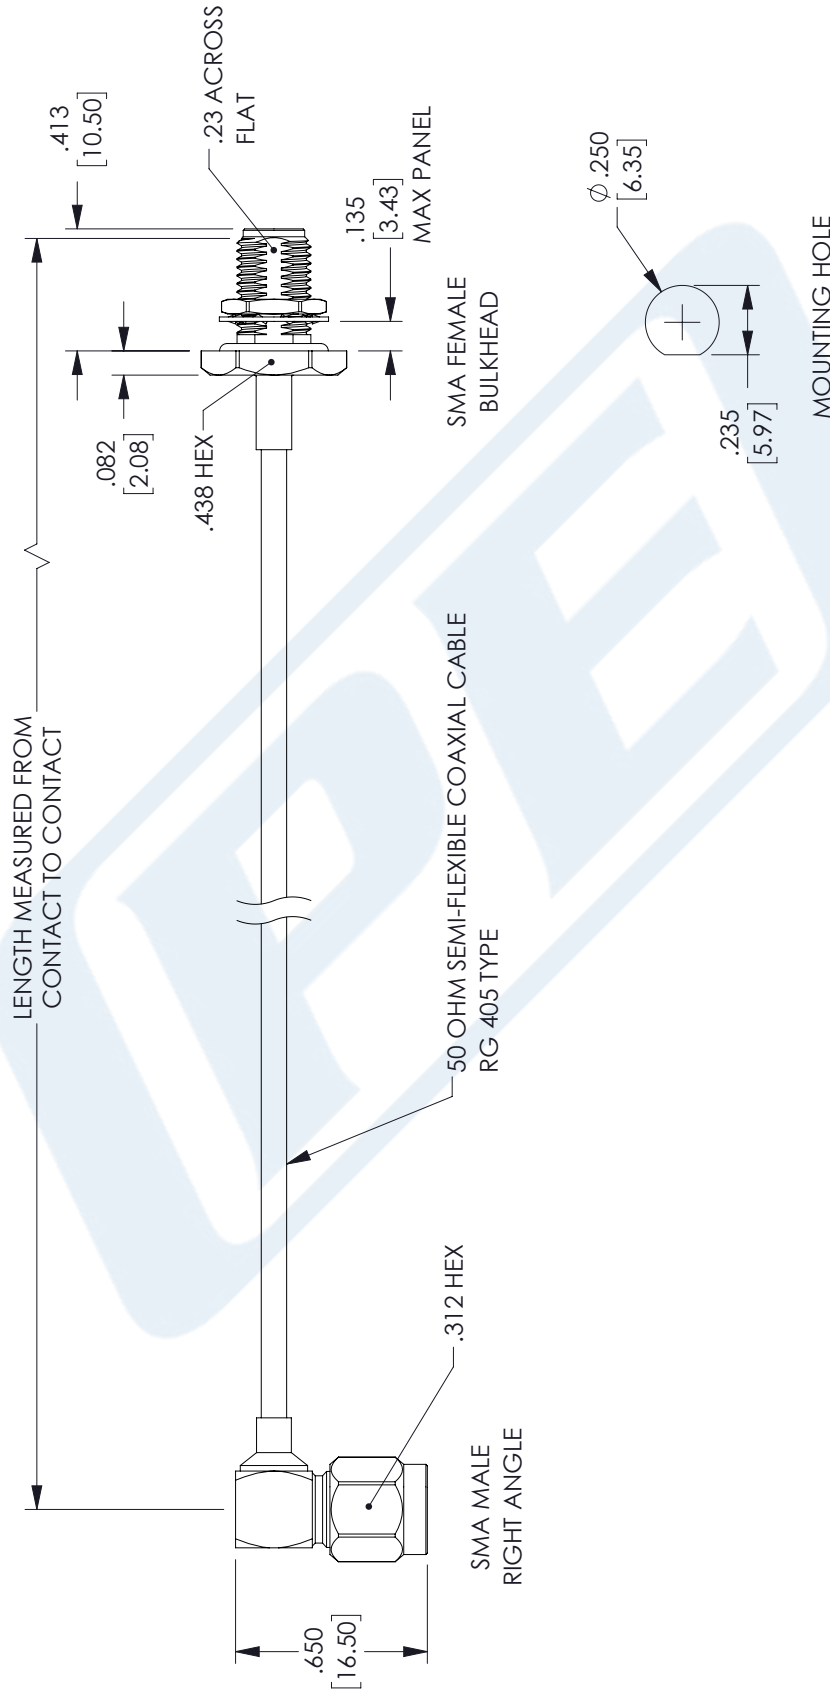

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		<div> PASTERNAK an INFINITI® brand</div> <div>Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com</div>		<div>THIRD-ANGLE PROJECTION</div> <div></div> <div>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.</div> <div>SHEET 1 OF 1</div> <div>SCALE N/A</div>			
TOLERANCES: X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ± .005 [.13] ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = ± .125 [-0] 12 [305] < L ≤ 60 [1524] = ± .2 [51] / -0 60 [1524] < L ≤ 120 [3048] = ± .4 [102] / -0 120 [3048] < L ≤ 300 [7620] = ± .6 [152] / -0 300 [7620] < L = +5% / -0		SIZE A		CAGE CODE 53919	DRAWN BY DZINN	ITEM NO. PE34313	REV B
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.							

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.