

## MCX Plug Right Angle to N Female Bulkhead Cable Using RG316 Coax with HeatShrink, LF Solder




### PE36638LF/HS

#### Configuration

- Connector 1: MCX Plug Right Angle
- Connector 2: N Female Bulkhead
- Cable Type: RG316
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

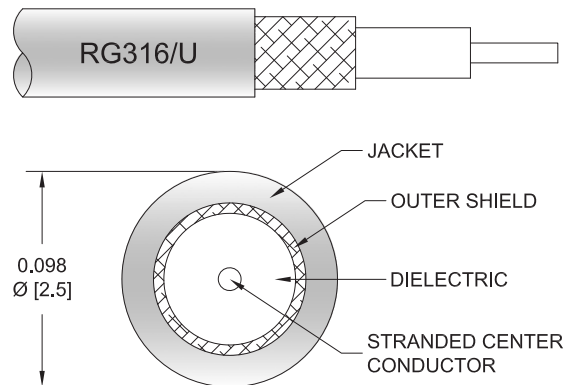

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE36638LF/HS MCX plug right angle to type N female bulkhead cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to type N cable assembly has a plug to female gender configuration with 50 ohm flexible RG316 coax. The PE36638LF/HS MCX plug to type N female cable assembly operates to 3 GHz. The right angle MCX interface on the RG316 cable allows for easier connections in tight spaces. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Operating Voltage (AC)			250	Vrms
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

## MCX Plug Right Angle to N Female Bulkhead Cable Using RG316 Coax with HeatShrink, LF Solder



### PE36638LF/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
		Frequency	100	250	500	1000	3000	MHz	
PE36638LF/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.11	0.16	0.24	0.38	0.58	dB/ft	
			0.37	0.53	0.79	1.25	1.91	dB/m	
PE36638LF/HS-12	12 inch	Insertion Loss (Typ.)	0.41	0.46	0.54	0.68	0.88	dB	0.102
PE36638LF/HS-24	24 inch	Insertion Loss (Typ.)	0.52	0.62	0.78	1.06	1.46	dB	0.113
PE36638LF/HS-36	36 inch	Insertion Loss (Typ.)	0.63	0.78	1.02	1.44	2.04	dB	0.123
PE36638LF/HS-48	48 inch	Insertion Loss (Typ.)	0.74	0.94	1.26	1.82	2.62	dB	0.133
PE36638LF/HS-72	72 inch	Insertion Loss (Typ.)	0.96	1.26	1.73	2.58	3.78	dB	0.153

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.102 pounds
Additional Weight per Inch:	0.00084 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.092 lbs [41.73 g]

#### Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

### Connectors

Description	Connector 1	Connector 2
Type	MCX Plug Right Angle	N Female Bulkhead
Specification	CECC 22220	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30µ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100µ in minimum

## MCX Plug Right Angle to N Female Bulkhead Cable Using RG316 Coax with HeatShrink, LF Solder



### PE36638LF/HS

#### Environmental Specifications

Operating Range Temperature

-40 to +60 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

**PE36638LF/HS - xx**

**uu**

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE36638LF/HS-12 = 12 inches long cable  
PE36638LF/HS-100cm = 100 cm long cable

MCX Plug Right Angle to N Female Bulkhead Cable Using RG316 Coax with HeatShrink, LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Plug Right Angle to N Female Bulkhead Cable Using RG316 Coax with HeatShrink, LF Solder PE36638LF/HS](#)

URL: <https://www.pasternack.com/mcx-plug-right-angle-to-n-female-bulkhead-cable-using-rg316-with-heatshrink-lf-solder-pe36638lf-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE36638LF/HS CAD Drawing
MCX Plug Right Angle to N Female Bulkhead Cable Using RG316 Coax with HeatShrink, LF Solder

