



N Male to N Male Right Angle Cable 12 Inch  
Length Using LMR-400 Coax

TECHNICAL DATA SHEET

PE3C0041-12

**N Male to N Male Right Angle Cable 12 Inch Length Using LMR-400 Coax**

**Configuration**

Connector 1	N Male
Connector 1 Specification	MIL-STD-348A
Connector 2	N Male Right Angle
Connector 2 Specification	MIL-STD-348A
Cable Type	LMR-400
Impedance, Ohms	50

**Mechanical Specifications**

**Cable Assembly**

Cable Type	LMR-400
------------	---------

**Temperature**

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85

**Size**

Length, in [mm]	12 [304.8]
Diameter, in [mm]	0.83 [21.08]
Weight, lbs [g]	0.27 [122.47]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	1 [25.4]
Repeated Minimum Bend Radius, in [mm]	4 [101.6]

**Cable**

No of Shields	2
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter, in [mm]	0.405 [10.29]

**Connector 1**

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	15µ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size, mm	18
Torque, in-lbs [Nm]	9 [1.02]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	Teflon

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Cable 12 Inch Length Using LMR-400 Coax PE3C0041-12](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



N Male to N Male Right Angle Cable 12 Inch  
Length Using LMR-400 Coax

TECHNICAL DATA SHEET

PE3C0041-12

**Connector 2**

Type	N Male Right Angle
Configuration	Right Angle
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	30 $\mu$ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal
Hex Size, mm	18
Torque, in-lbs [Nm]	9 [1.02]
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	Teflon

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes: Values at 25 °C, sea level

N Male to N Male Right Angle Cable 12 Inch Length Using LMR-400 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to N Male Right Angle Cable 12 Inch Length Using LMR-400 Coax PE3C0041-12](http://www.pasternack.com/n-male-n-male-lmr400-cable-assembly-pe3c0041-12-p.aspx)

URL: <http://www.pasternack.com/n-male-n-male-lmr400-cable-assembly-pe3c0041-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE3C0041-12 CAD Drawing

N Male to N Male Right Angle Cable 12 Inch Length Using LMR-400 Coax

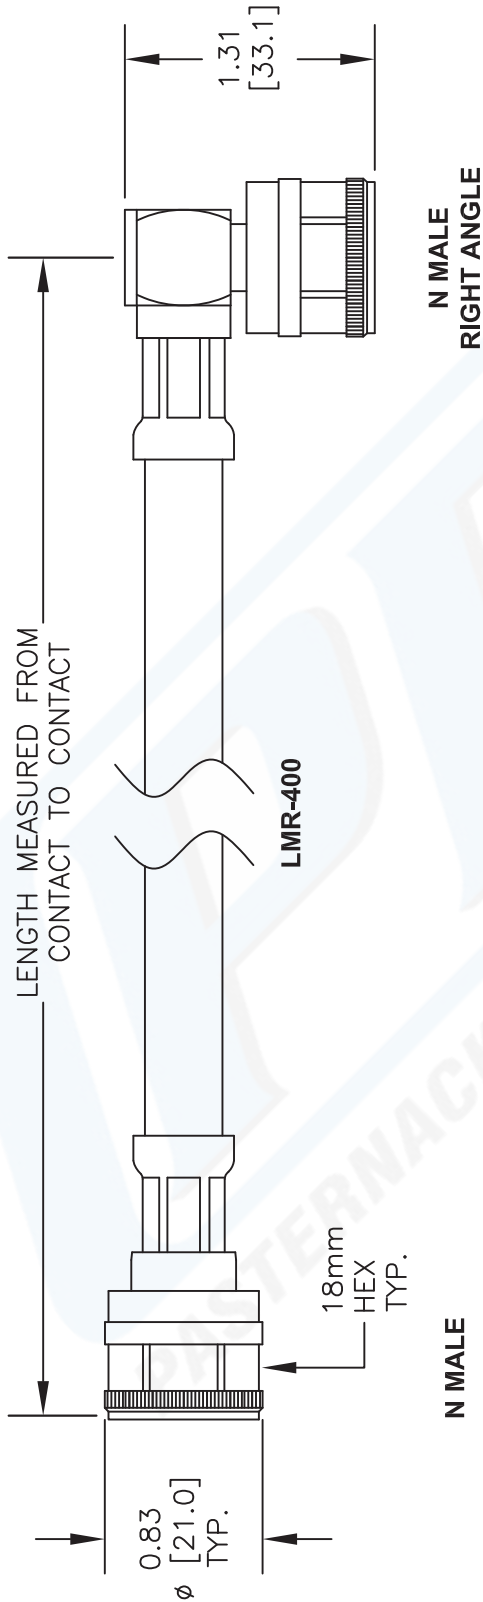

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration		-12	12"	-25CM	25Cm
PE3	zzz	-24	24"	-50CM	50Cm
00 - 99999	yy	-36	36"	-75CM	75Cm
LF = RoHS Compliant	xx	-48	48"	-100CM	100Cm
< Blank > = Standard	uu	-60	60"	-125CM	125Cm
Note: LF applies only to RF cables		-xx	Custom Length	-xxCM	Custom Length

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE  
**PE3C0041**

**PE PASTERNAK**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919	CAD FILE 013113	SCALE N/A	SIZE A	2233
----------------	-----------------	-----------	--------	------