



N Male to QN Male Right Angle Cable Using LMR-195 Coax

TECHNICAL DATA SHEET

PE3C0059

N Male to QN Male Right Angle Cable Using LMR-195 Coax

Configuration

Connector 1	N Male
Connector 2	QN Male Right Angle
Cable Type	LMR-195

Electrical Specifications

Impedance, Ohms	50
-----------------	----

Mechanical Specifications

Cable Assembly

Cable Type	LMR-195
------------	---------

Temperature

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85
Diameter, in [mm]	0.8 [20.32]
Weight, lbs [g]	0.227 [102.97]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	0.5 [12.7]
Repeated Minimum Bend Radius, in [mm]	2 [50.8]

Cable

No of Shields	2
Dielectric Type	PE (F)
Jacket Material	PE
Jacket Diameter, in [mm]	0.195 [4.95]

Connector 1

Type	N Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Silver
Inner Conductor Plating Specification	15µ in. minimum
Body Material and Plating	Brass, Nickel

Connector 2

Type	QN Male Right Angle
Configuration	Right Angle
Inner Conductor Material and Plating	Brass, Gold
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to QN Male Right Angle Cable Using LMR-195 Coax PE3C0059](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



N Male to QN Male Right Angle Cable Using LMR-195 Coax

TECHNICAL DATA SHEET

PE3C0059

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data


Notes:

Values at 25 °C, sea level

URL: <http://www.pasternack.com/n-male-qn-male-lmr195-cable-assembly-pe3c0059-p.aspx>

N Male to QN Male Right Angle Cable Using LMR-195 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

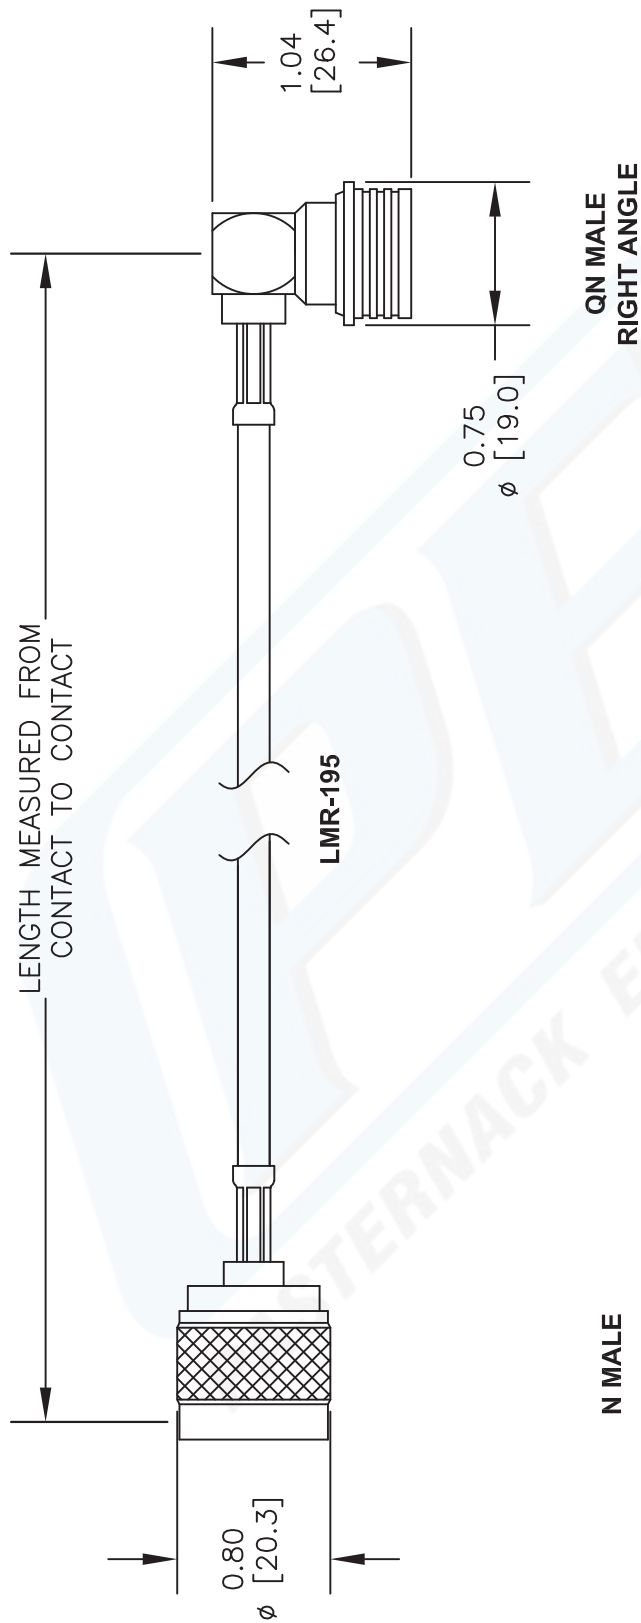

How To Order					
Part Number Configuration		Examples			
PE3 [zzz] [yy] - [xx] [uu]		PE3000LF-100		-12	
		PE3000-100		-24	
		PE3000LF-100CM		-36	
		PE3000-100CM		-48	
				-60	
				-xx	
00 - 99999					
LF = RoHS Compliant					
< Blank > = Standard					
Note: LF applies only to RF cables					
_____ Length					

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

PE3C0059

FSCM NO. 53919

CAD FILE 020513
SCALE N/A
SIZE A
2233