



SMA Male to SMA Male Cable Using LMR-100 Coax And Times Connectors

TECHNICAL DATA SHEET

PE3C0113

**SMA Male to SMA Male Cable Using LMR-100 Coax And Times Connectors**

**Configuration**

Connector 1	SMA Male
Connector 2	SMA Male
Cable Type	LMR-100A
Impedance, Ohms	50

**Mechanical Specifications**

**Cable Assembly**

Cable Type	LMR-100A
------------	----------

**Temperature**

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85
Diameter, in [mm]	0.312 [7.92]
Weight, lbs [g]	0.044 [19.96]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	0.25 [6.35]
Repeated Minimum Bend Radius, in [mm]	1 [25.4]

**Cable**

No of Shields	2
Dielectric Type	PE
Jacket Material	PVC
Jacket Diameter, in [mm]	0.11 [2.79]

**Connector 1**

Type	SMA Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Coupling Nut Material and Plating	Stainless Steel
Body Material and Plating	Stainless Steel
Dielectric Type	Teflon

**Connector 2**

Type	SMA Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Coupling Nut Material and Plating	Stainless Steel
Body Material and Plating	Stainless Steel
Dielectric Type	Teflon

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable Using LMR-100 Coax And Times Connectors PE3C0113](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## SMA Male to SMA Male Cable Using LMR-100 Coax And Times Connectors

### TECHNICAL DATA SHEET

PE3C0113

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

#### Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMA Male to SMA Male Cable Using LMR-100 Coax And Times Connectors from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable Using LMR-100 Coax And Times Connectors PE3C0113](#)

URL: <http://www.pasternack.com/sma-male-sma-male-lmr100-cable-assembly-pe3c0113-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE3C0113 CAD Drawing

SMA Male to SMA Male Cable Using LMR-100 Coax And Times Connectors

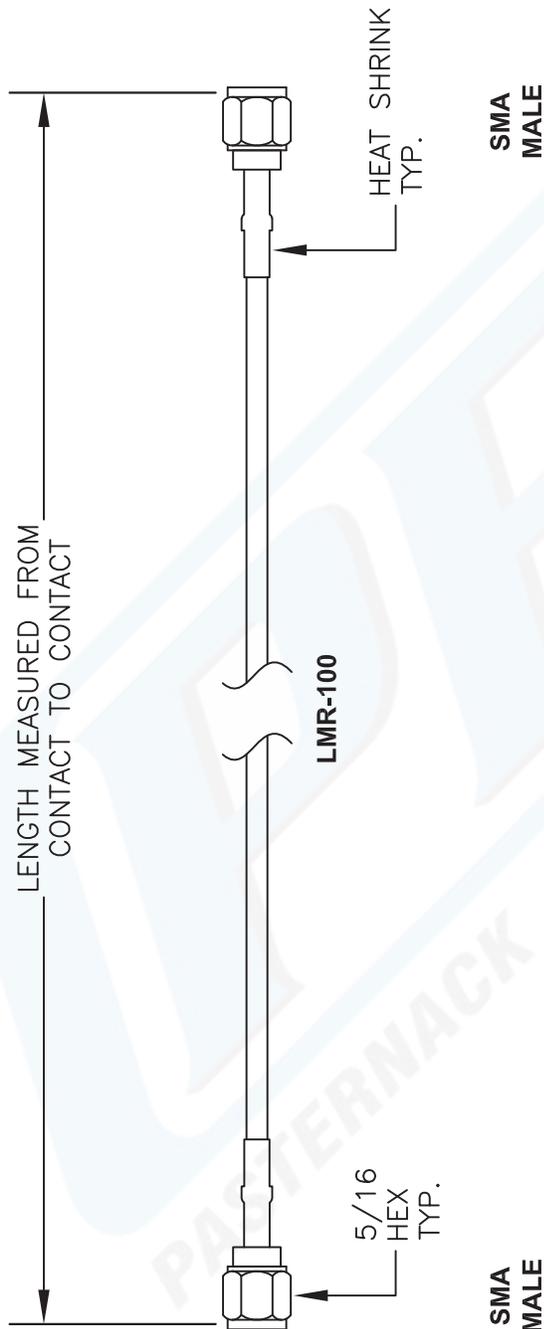

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration	Examples	-12	12"	-25CM	25Cm
PE3 [zzz] [yy] - [xx] [uu]	PE3000LF-100	-24	24"	-50CM	50Cm
00 - 99999	PE3000-100	-36	36"	-75CM	75Cm
LF = RoHS Compliant	PE3000LF-100CM	-48	48"	-100CM	100Cm
< Blank > = Standard	PE3000-100CM	-60	60"	-125CM	125Cm
Note: LF applies only to RF cables		-xx	Custom Length	-xxCM	Custom Length

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE  
**PE3C0113**

**PE PASTERNAK®**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 022613

SCALE N/A

SIZE A

2233