

## Water Blue FAKRA Jack Right Angle to FAKRA Jack Cable Using RG174 Coax with HeatShrink




### PE3C1155/HS

#### Configuration

- Connector 1: FAKRA Jack Right Angle
- Connector 2: FAKRA Jack
- Cable Type: RG174
- Coax Flex Type: Flexible

#### Features

- Max Frequency 1 GHz
- 66% Phase Velocity
- PVC Jacket

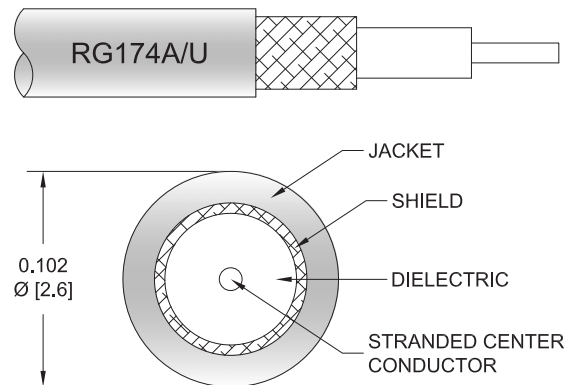

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C1155/HS water blue FAKRA jack right angle to FAKRA jack cable using RG174 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack FAKRA to FAKRA cable assembly has a jack to jack gender configuration with 50 ohm flexible RG174 coax. The PE3C1155/HS FAKRA jack to FAKRA jack cable assembly operates to 1 GHz. The right angle FAKRA interface on the RG174 cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1	GHz
VSWR			1.4:1	
Velocity of Propagation		66		%
Capacitance		31.08 [101.97]		pF/ft [pF/m]

#### Specifications by Frequency

## Water Blue FAKRA Jack Right Angle to FAKRA Jack Cable Using RG174 Coax with HeatShrink



### PE3C1155/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency					MHz	
PE3C1155/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.04	0.08	0.14	0.21	0.32	dB/ft	
			0.14	0.28	0.45	0.7	1.05	dB/m	
PE3C1155/HS-12	12 inch	Insertion Loss (Typ.)	0.35	0.39	0.44	0.52	0.62	dB	0.03
PE3C1155/HS-24	24 inch	Insertion Loss (Typ.)	0.39	0.47	0.58	0.73	0.94	dB	0.039
PE3C1155/HS-36	36 inch	Insertion Loss (Typ.)	0.43	0.56	0.72	0.94	1.26	dB	0.048
PE3C1155/HS-48	48 inch	Insertion Loss (Typ.)	0.47	0.64	0.85	1.15	1.58	dB	0.057
PE3C1155/HS-72	72 inch	Insertion Loss (Typ.)	0.56	0.81	1.13	1.57	2.22	dB	0.075

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.2 dB
Loss due to Connector 2:	0.1 dB
Base Weight:	0.03 pounds
Additional Weight per Inch:	0.00075 pounds

### Mechanical Specifications

#### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.021 lbs [9.53 g]

#### Cable

Cable Type	RG174
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]

### Connectors

Description	Connector 1	Connector 2
Type	FAKRA Jack Right Angle	FAKRA Jack
Impedance	50 Ohms	50 Ohms
Configuration	Right Angle	Straight
Color	WB	WB
Contact Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	Brass, Nickel
Body Material and Plating	Plastic	Plastic

## Water Blue FAKRA Jack Right Angle to FAKRA Jack Cable Using RG174 Coax with HeatShrink



### PE3C1155/HS

#### Environmental Specifications

**Compliance Certifications** (see [product page](#) for current document)


#### Plotted and Other Data

Notes:

#### Typical Performance Data

#### How to Order

Part Number Configuration:

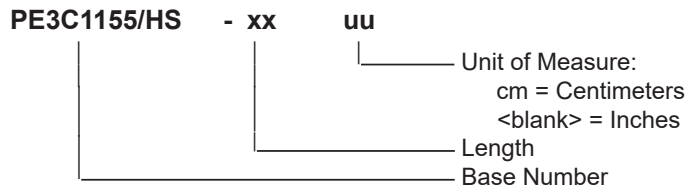

Example: PE3C1155/HS-12 = 12 inches long cable  
PE3C1155/HS-100cm = 100 cm long cable

Water Blue FAKRA Jack Right Angle to FAKRA Jack Cable Using RG174 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Water Blue FAKRA Jack Right Angle to FAKRA Jack Cable Using RG174 Coax with HeatShrink PE3C1155/HS](#)

URL: <https://www.pasternack.com/fakra-jack-right-angle-to-fakra-jack-cable-using-rg174-with-heatshrink-pe3c1155-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PE3C1155/HS CAD Drawing

Water Blue FAKRA Jack Right Angle to FAKRA Jack Cable Using RG174 Coax with HeatShrink

