



TNC Male to TNC Male Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C9816

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: TCOM-240
- Coax Flex Type: Flexible

Features

- Max Frequency 6 GHz
- Double Shielded
- PE Jacket
- 500 Mating Cycles

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C9816 TNC male to TNC male cable using TCOM-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible TCOM-240 coax. The PE3C9816 TNC male to TNC male cable assembly operates to 6 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Typ.)	0.036	0.052	0.075	0.123	0.197	dB/ft
	0.12	0.17	0.25	0.4	0.65	dB/m

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable Using TCOM-240 Coax with Times Microwave Components PE3C9816](#)



TNC Male to TNC Male Low Loss Cable Using
TCOM-240 Coax with Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C9816

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as $0.1 \cdot \sqrt{f(\text{GHz})}$ dB per connector.

Mechanical Specifications

Cable Assembly

Weight 0.13 lbs [58.97 g]

Cable

Cable Type TCOM-240
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper
 Dielectric Type PE (F)
 Number of Shields 2
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Tinned Copper Braid
 Jacket Material PE, Black
 Jacket Diameter 0.24 in [6.1 mm]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Threaded	TNC Male Threaded
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Phosphor Bronze, Gold	Phosphor Bronze, Gold
Contact Plating Specification	50µ in. minimum	50µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Plating Specification	80µ in. minimum	80µ in. minimum
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Plating Specification	80µ in. minimum	80µ in. minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable Using TCOM-240 Coax with Times Microwave Components PE3C9816](#)



TNC Male to TNC Male Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

RF Cable Assemblies Technical Data Sheet

PE3C9816

How to Order

Part Number Configuration:

PE3C9816

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3C9816-12 = 12 inches long cable
PE3C9816-100cm = 100 cm long cable

TNC Male to TNC Male Low Loss Cable Using TCOM-240 Coax with Times Microwave Components from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Low Loss Cable Using TCOM-240 Coax with Times Microwave Components PE3C9816](#)

URL: <https://www.pasternack.com/tnc-male-to-tnc-male-low-loss-cable-using-tcom-240-pe3c9816-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C9816 CAD Drawing

TNC Male to TNC Male Low Loss Cable Using TCOM-240 Coax with Times Microwave Components

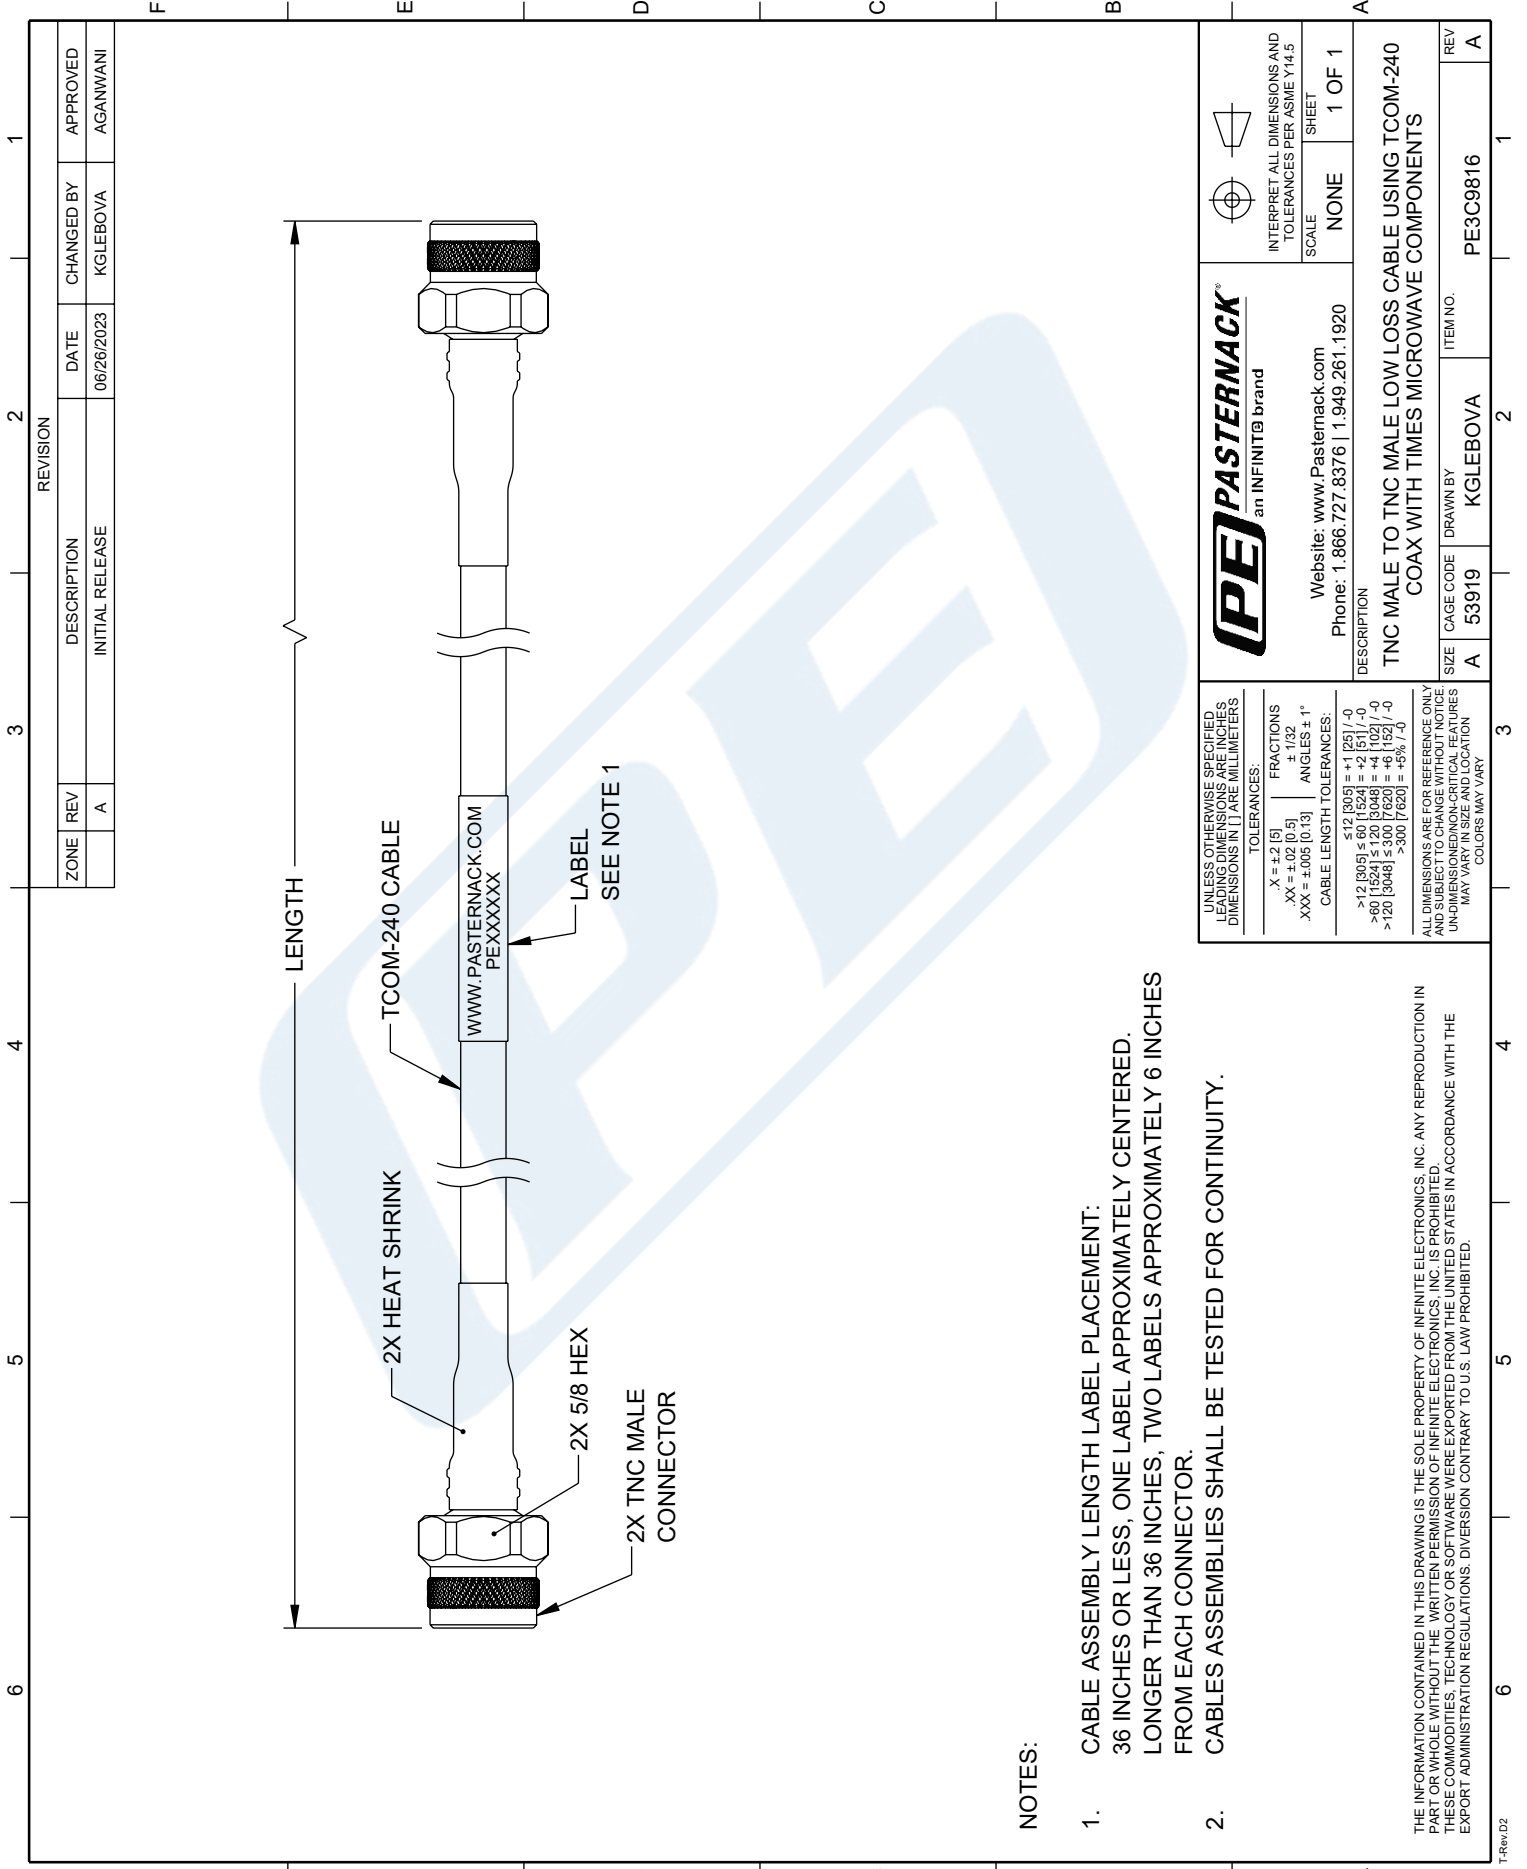

NOTES:

1. CABLE ASSEMBLY LENGTH LABEL PLACEMENT:
36 INCHES OR LESS, ONE LABEL APPROXIMATELY CENTERED.
LONGER THAN 36 INCHES, TWO LABELS APPROXIMATELY 6 INCHES
FROM EACH CONNECTOR.
2. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">.X = ±.2 [9]</td> <td style="width: 33%;">FRACTIONS ± 1/32</td> <td style="width: 33%;">ANGLES ± 1°</td> </tr> <tr> <td>.XX = ±.02 [0.5]</td> <td></td> <td></td> </tr> <tr> <td>.XXX = ±.005 [0.13]</td> <td></td> <td></td> </tr> </table> <p>CABLE LENGTH TOLERANCES:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">≤ 12 [305]</td> <td style="width: 33%;">= +1 [25] / -0</td> </tr> <tr> <td style="width: 33%;">> 12 [305] ≤ 60 [1524]</td> <td style="width: 33%;">= +2 [51] / -0</td> </tr> <tr> <td style="width: 33%;">> 60 [1524] ≤ 120 [3048]</td> <td style="width: 33%;">= +4 [102] / -0</td> </tr> <tr> <td style="width: 33%;">> 120 [3048] ≤ 300 [7620]</td> <td style="width: 33%;">= +6 [152] / -0</td> </tr> <tr> <td style="width: 33%;">> 300 [7620]</td> <td style="width: 33%;">= +5% / -0</td> </tr> </table> <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UNDIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY</p>	.X = ±.2 [9]	FRACTIONS ± 1/32	ANGLES ± 1°	.XX = ±.02 [0.5]			.XXX = ±.005 [0.13]			≤ 12 [305]	= +1 [25] / -0	> 12 [305] ≤ 60 [1524]	= +2 [51] / -0	> 60 [1524] ≤ 120 [3048]	= +4 [102] / -0	> 120 [3048] ≤ 300 [7620]	= +6 [152] / -0	> 300 [7620]	= +5% / -0	<p>PE PASTERNAK an INFINITI® brand</p> <p>Website: www.Pasternack.com Phone: 1.866.727.8376 1.949.261.1920</p> <p>DESCRIPTION TNC MALE TO TNC MALE LOW LOSS CABLE USING TCOM-240 COAX WITH TIMES MICROWAVE COMPONENTS</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">SCALE</td> <td style="width: 33%;">NONE</td> <td style="width: 33%;">SHEET</td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;">1 OF 1</td> </tr> </table>	SCALE	NONE	SHEET			1 OF 1
.X = ±.2 [9]	FRACTIONS ± 1/32	ANGLES ± 1°																									
.XX = ±.02 [0.5]																											
.XXX = ±.005 [0.13]																											
≤ 12 [305]	= +1 [25] / -0																										
> 12 [305] ≤ 60 [1524]	= +2 [51] / -0																										
> 60 [1524] ≤ 120 [3048]	= +4 [102] / -0																										
> 120 [3048] ≤ 300 [7620]	= +6 [152] / -0																										
> 300 [7620]	= +5% / -0																										
SCALE	NONE	SHEET																									
		1 OF 1																									
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">ZONE</td> <td style="width: 25%;">REV</td> <td style="width: 25%;">DESCRIPTION</td> <td style="width: 25%;">DATE</td> <td style="width: 25%;">CHANGED BY</td> <td style="width: 25%;">APPROVED</td> </tr> <tr> <td></td> <td style="text-align: center;">A</td> <td>INITIAL RELEASE</td> <td style="text-align: center;">06/26/2023</td> <td style="text-align: center;">KGLEBOVA</td> <td style="text-align: center;">AGANWANI</td> </tr> </table>	ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED		A	INITIAL RELEASE	06/26/2023	KGLEBOVA	AGANWANI	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">SIZE</td> <td style="width: 25%;">CAGE CODE</td> <td style="width: 25%;">DRAWN BY</td> <td style="width: 25%;">ITEM NO.</td> </tr> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">53919</td> <td style="text-align: center;">KGLEBOVA</td> <td style="text-align: center;">PE3C9816</td> </tr> </table>	SIZE	CAGE CODE	DRAWN BY	ITEM NO.	A	53919	KGLEBOVA	PE3C9816	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">REV</td> <td style="width: 25%;">DESCRIPTION</td> </tr> <tr> <td style="text-align: center;">A</td> <td></td> </tr> </table>	REV	DESCRIPTION	A		
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED																						
	A	INITIAL RELEASE	06/26/2023	KGLEBOVA	AGANWANI																						
SIZE	CAGE CODE	DRAWN BY	ITEM NO.																								
A	53919	KGLEBOVA	PE3C9816																								
REV	DESCRIPTION																										
A																											