

SMA Female 4 Hole Flange to SMP Female Right Angle Cable Using PE-SR405AL Coax with HeatShrink




PE3W09727/HS

Configuration

- Connector 1: SMA Female 4 Hole Flange
- Connector 2: SMP Female Right Angle
- Cable Type: PE-SR405AL
- Coax Flex Type: Semi-Rigid

Features

- Max Frequency 18 GHz

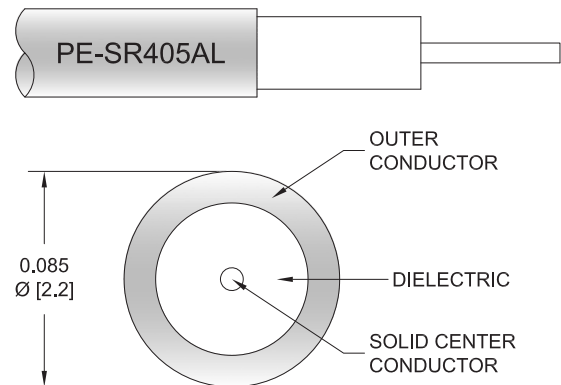

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W09727/HS SMA female 4 hole flange to SMP female right angle cable using PE-SR405AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMA to SMP cable assembly has a female to female gender configuration with 50 ohm semi-rigid PE-SR405AL coax. The PE3W09727/HS SMA female to SMP female cable assembly operates to 18 GHz. The right angle SMP interface on the PE-SR405AL cable allows for easier connections in tight spaces. Our RF cable assembly with SMA 4 hole flange interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.4:1	

Specifications by Frequency

SMA Female 4 Hole Flange to SMP Female Right Angle Cable Using PE-SR405AL Coax with HeatShrink



PE3W09727/HS

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		1000	2000	4500	9000	
PE3W09727/HS	Custom Lengths Available	Insertion Loss (Typ.)	0.23	0.294	0.456	0.746	1.21	dB/ft	
			0.76	0.97	1.5	2.45	3.97	dB/m	
PE3W09727/HS-6	6 In	Insertion Loss (Typ.)	0.42	0.45	0.53	0.68	0.91	dB	0.016
PE3W09727/HS-12	12 In	Insertion Loss (Typ.)	0.53	0.6	0.76	1.05	1.51	dB	0.023
PE3W09727/HS-18	18 In	Insertion Loss (Typ.)	0.65	0.75	0.99	1.42	2.12	dB	0.031
PE3W09727/HS-24	24 In	Insertion Loss (Typ.)	0.76	0.89	1.22	1.8	2.72	dB	0.038
PE3W09727/HS-36	36 In	Insertion Loss (Typ.)	0.99	1.19	1.67	2.54	3.93	dB	0.052

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1:	0.1 dB
Loss due to Connector 2:	0.2 dB
Base Weight:	0.023 pounds
Additional Weight per Inch:	0.00117 pounds

Mechanical Specifications

Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.009 lbs [4.08 g]

Cable

Cable Type	PE-SR405AL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor 1 Material and Plating	Tinned Aluminum
One Time Minimum Bend Radius	0.05 in [1.27 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Female 4 Hole Flange	SMP Female Right Angle
Specification		MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Right Angle
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Stainless Steel, Gold	Beryllium Copper, Gold

SMA Female 4 Hole Flange to SMP Female Right Angle Cable Using PE-SR405AL Coax with HeatShrink



PE3W09727/HS

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

Notes:

Typical Performance Data

How to Order

Part Number Configuration:

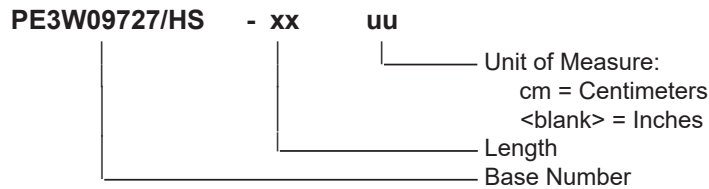

Example: PE3W09727/HS-12 = 12 inches long cable
PE3W09727/HS-100cm = 100 cm long cable

SMA Female 4 Hole Flange to SMP Female Right Angle Cable Using PE-SR405AL Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female 4 Hole Flange to SMP Female Right Angle Cable Using PE-SR405AL Coax with HeatShrink PE3W09727/HS](#)

URL: <https://www.pasternack.com/sma-female-4-hole-flange-to-smp-female-cable-using-pe-sr405al-with-heatshrink-pe3w09727-hs-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

PE3W09727/HS CAD Drawing

SMA Female 4 Hole Flange to SMP Female Right Angle Cable Using PE-SR405AL Coax with HeatShrink

