



3.5mm Female Bulkhead to 3.5mm Female Cable Using PE-SR402FLJ Coax in 60 Inch

RF Cable Assemblies Technical Data Sheet


PE3W13944-60

Configuration

- Connector 1: 3.5mm Female Bulkhead
- Connector 2: 3.5mm Female
- Cable Type: PE-SR402FLJ

Features

- Shielding Effectivity > 100 dB
- 70% Phase Velocity
- FEP Jacket

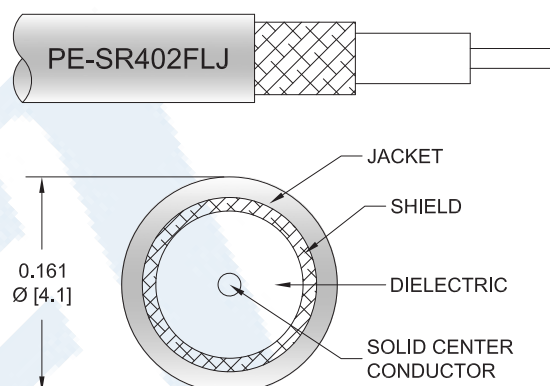

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W13944-60 3.5mm female bulkhead to 3.5mm female cable using PE-SR402FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack 3.5mm to 3.5mm cable assembly has a female to female gender configuration with 50 ohm formable PE-SR402FLJ coax. Our RF cable assembly with 3.5mm bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		70		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.23 [27]		Ω/1000ft [Ω/Km]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Female Bulkhead to 3.5mm Female Cable Using PE-SR402FLJ Coax in 60 Inch PE3W13944-60](#)



3.5mm Female Bulkhead to 3.5mm Female Cable
Using PE-SR402FLJ Coax in 60 Inch

RF Cable Assemblies Technical Data Sheet

PE3W13944-60

Mechanical Specifications

Cable Assembly

Length*	60 in [152.4 cm]
Weight	0.157 lbs [71.21 g]

Cable

Cable Type	PE-SR402FLJ
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Outer Conductor Material and Plating	Tinned Copper Braid
Jacket Material	FEP, Black
Jacket Diameter	0.161 in [4.09 mm]
One Time Minimum Bend Radius	0.315 in [8 mm]
Repeated Minimum Bend Radius	1.575 in [40.01 mm]

Connectors

Description	Connector 1	Connector 2
Type	3.5mm Female Bulkhead	3.5mm Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Beryllium Copper, Gold over Nickel
Contact Plating Specification		50 µin minimum
Dielectric Type	PTFE	PCTFE
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification		SAE-AMS-2700

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Female Bulkhead to 3.5mm Female Cable Using PE-SR402FLJ Coax in 60 Inch PE3W13944-60](#)



3.5mm Female Bulkhead to 3.5mm Female Cable Using PE-SR402FLJ Coax in 60 Inch

RF Cable Assemblies Technical Data Sheet

PE3W13944-60

How to Order

Part Number Configuration:

PE3W13944

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W13944-12 = 12 inches long cable
PE3W13944-100cm = 100 cm long cable

3.5mm Female Bulkhead to 3.5mm Female Cable Using PE-SR402FLJ Coax in 60 Inch from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3.5mm Female Bulkhead to 3.5mm Female Cable Using PE-SR402FLJ Coax in 60 Inch PE3W13944-60](https://www.pasternack.com/3.5mm-female-bulkhead-to-3.5mm-female-cable-using-pe-sr402flj-pe3w13944-60-p.aspx)


URL: <https://www.pasternack.com/3.5mm-female-bulkhead-to-3.5mm-female-cable-using-pe-sr402flj-pe3w13944-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W13944-60 CAD Drawing

3.5mm Female Bulkhead to 3.5mm Female Cable Using PE-SR402FLJ Coax in 60 Inch

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/10/2022	AGANWANI

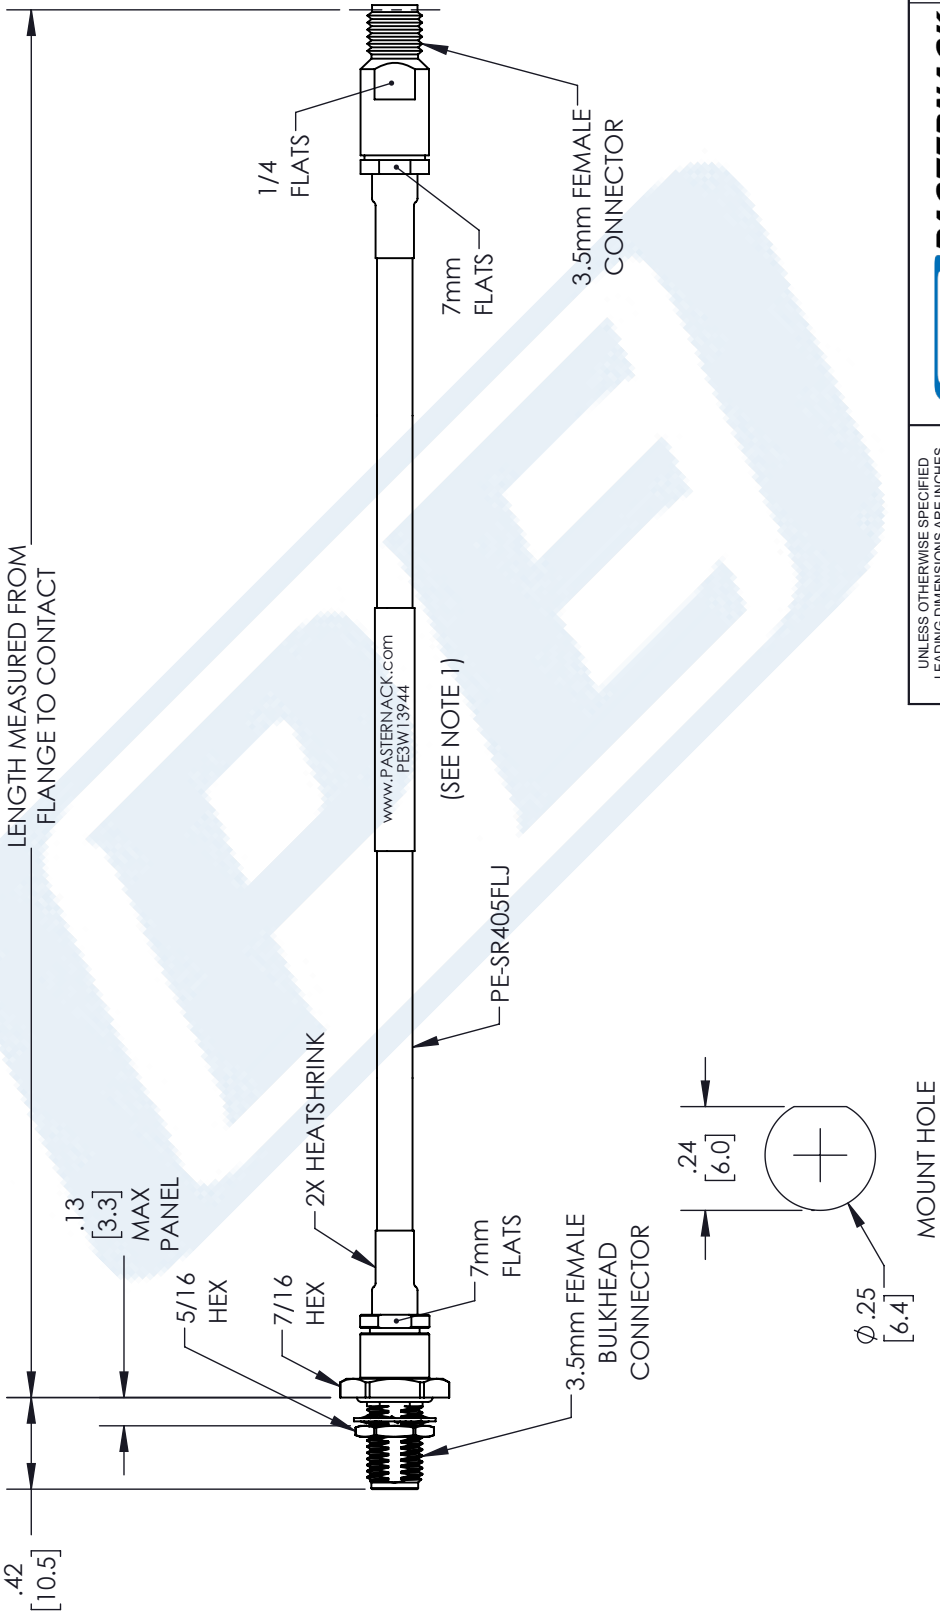

NOTES:

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END 6.0" FROM END OF CONNECTOR

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	FRACTIONS
.X = ±.2	[.08]
.XX = ±.02	[.51]
.XXX = ±.005	[.13]
CABLE LENGTH (L) TOLERANCES:	ANGLES ± 1°
L ≤ 12 [305] = ±1 [25] / -0	
12 [305] < L ≤ 60 [1524] = ±2 [51] / -0	
60 [1524] < L ≤ 120 [3048] = ±4 [102] / -0	
120 [3048] < L ≤ 300 [7620] = ±6 [152] / -0	
300 [7620] < L = ±5% / -0	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	

PE PASTERNAK an INFINITI® brand	
Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com	
SIZE A	CAGE CODE 53919
DRAWN BY BPUCHASKI	ITEM NO. PE3W13944
REV A	SCALE N/A
SHEET 1 OF 1	
THIRD-ANGLE PROJECTION	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.