



DC Block on Inner Conductor 75 Ohm BNC Male to BNC Female Operating From 100 MHz to 4 GHz

DC Blocks Technical Data Sheet

PE8231

Features

- Inner DC Block
- Operates from 100 MHz to 4 GHz
- Good Insertion Loss of 0.5 dB Max

Applications

- Test & Measurement
- Ground Loop Elimination
- Signal to Noise Ratio (SNR) Improvement

Description

Pasternack's PE8231 is an inner DC block with BNC connectors. It has a blocking capacitor on the inner conductor and operates from 100 MHz to 4 GHz. Our BNC DC block offers good insertion loss of 0.5 dB and has a maximum operating voltage of 200 Vdc. DC blocks are commonly used to filter out unwanted DC signals, while allowing AC drive signals to pass through. They can help improve signal to noise ratio (SNR), eliminate ground loops, or provide isolation in your test setup. All of Pasternack's DC blocks are in stock and available to ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.1		4	GHz
Impedance		75		Ohms
VSWR			1.35:1	
Insertion Loss			0.5	dB
Operating Voltage (DC)			200	Volts

Electrical Specification Notes:

75 ohm BNC connectors mate only with other 75 ohm BNC series. Mating with 50 ohm BNC connectors may cause damage.

Mechanical Specifications

Size

Length	1.6 in [40.64 mm]
Width	0.57 in [14.48 mm]
Weight	0.055 lbs [24.95 g]
Housing Material and Plating	Brass, Nickel

Configuration

Design	Inner DC Block
Package Type	Connectorized

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [DC Block on Inner Conductor 75 Ohm BNC Male to BNC Female Operating From 100 MHz to 4 GHz PE8231](#)



DC Block on Inner Conductor 75 Ohm BNC Male to BNC Female Operating From 100 MHz to 4 GHz

DC Blocks Technical Data Sheet

PE8231

Description	Connector 1	Connector 2
Type	BNC Male	BNC Female
Inner Conductor Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Coupling Nut Material and Plating	Brass, Nickel	
Body Material and Plating	Brass, Nickel	Brass, Nickel

Environmental Specifications

Temperature

Operating Range

-65 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

DC Block on Inner Conductor 75 Ohm BNC Male to BNC Female Operating From 100 MHz to 4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [DC Block on Inner Conductor 75 Ohm BNC Male to BNC Female Operating From 100 MHz to 4 GHz PE8231](#)

URL: <https://www.pasternack.com/75-ohm-bnc-inner-dc-block-0.1-4-ghz-pe8231-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE8231 CAD Drawing

DC Block on Inner Conductor 75 Ohm BNC Male to BNC
Female Operating From 100 MHz to 4 GHz

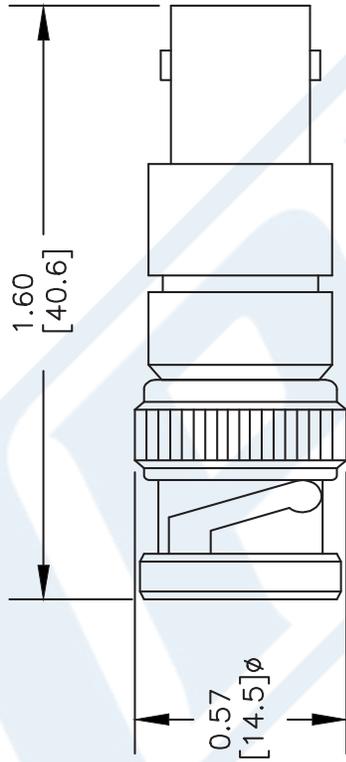

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE8231

FSCM NO. 53919

CAD FILE 080802

SCALE N/A

SIZE A

XXXX

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com